
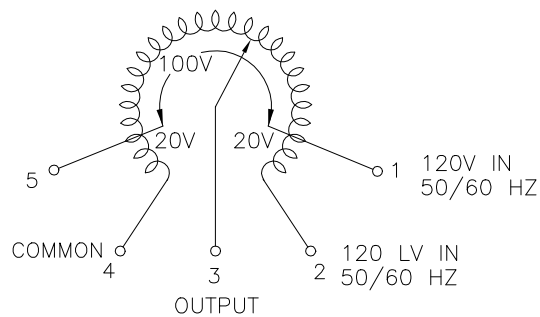
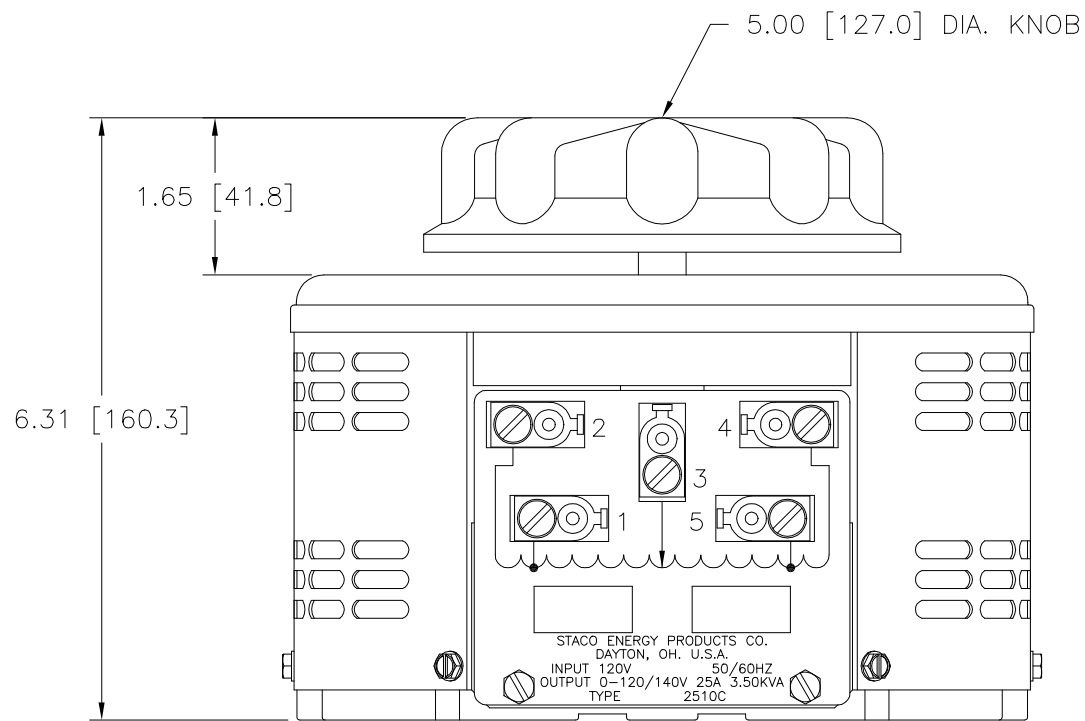
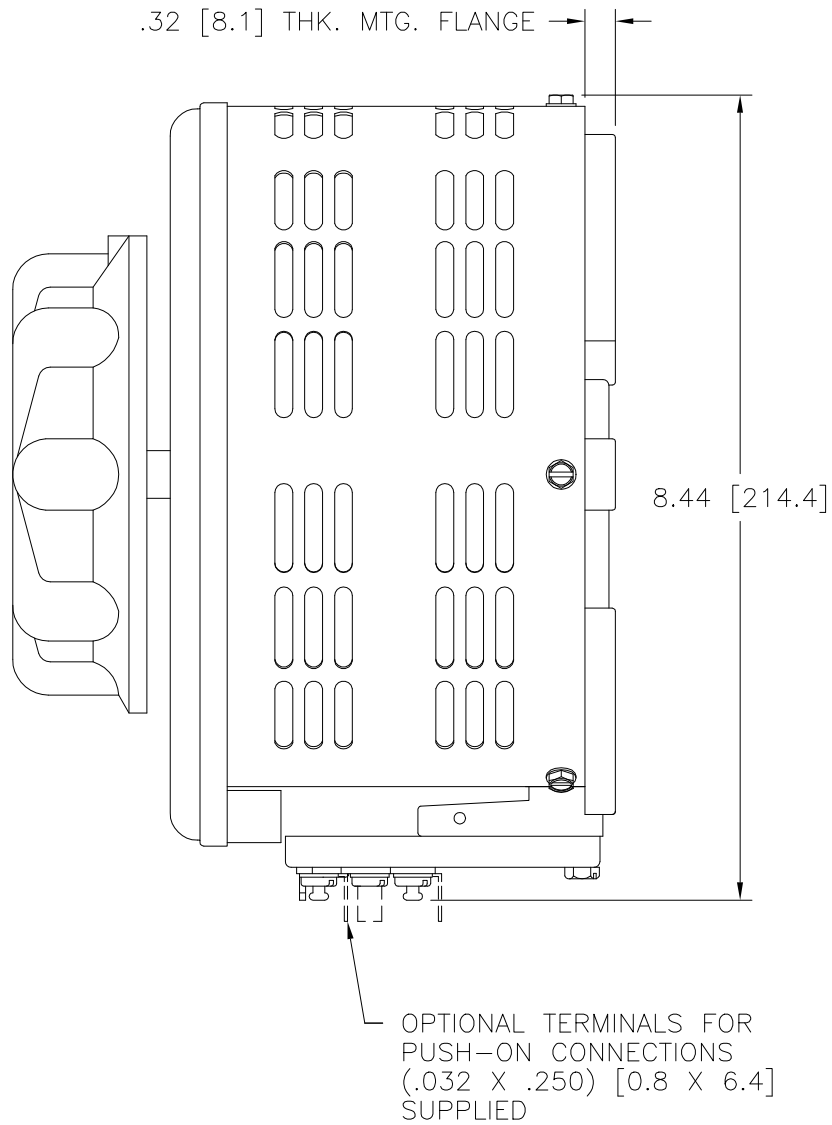


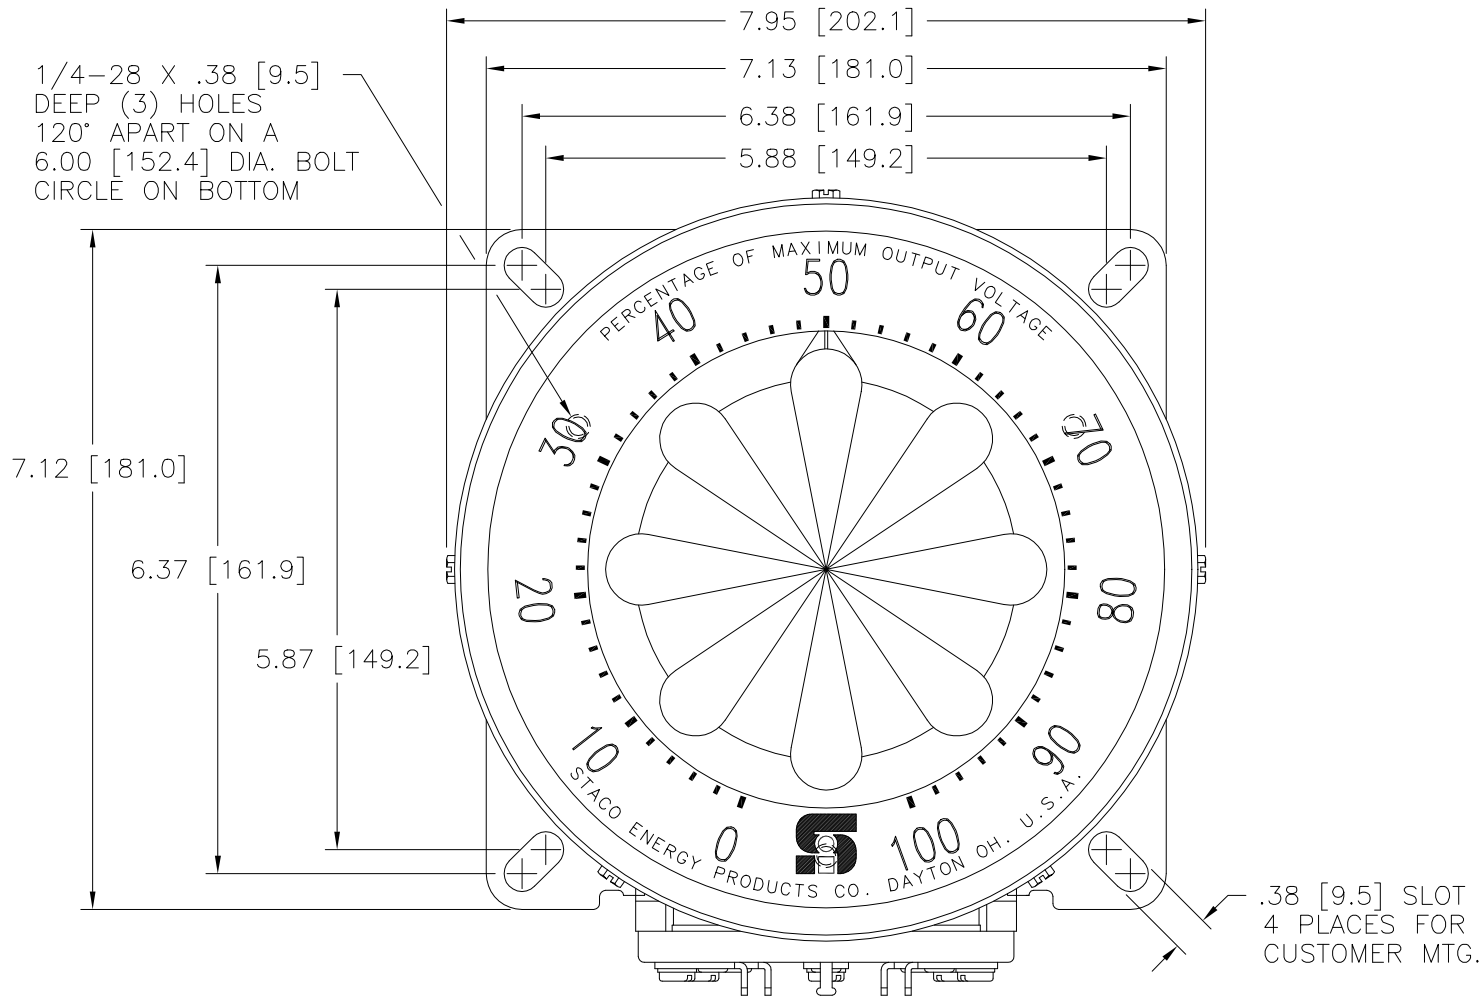

SCHEMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

NOTE:
UNIT IS SUPPLIED WITH A 7.00 [177.8] DIA. 0-100 GRADUATED DIAL PLATE FOR PANEL MOUNTING.

SPECIFICATIONS												
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS				
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END				
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT	
SINGLE PHASE	120	50/60	0-120	25	3.00	30	3.6	CW	2-4	——	4-3	
									CCW	2-4	——	2-3
									CW	1-4	——	4-3
			0-140	25	3.50	——	——	CCW	2-5	——	2-3	
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			UNITS		TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 2510C				 STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.			
DECIMALS	HOLES	ANGLES	DRAFT	IN [mm]								
.XX	.0005	.06	1-1/2°									
MATERIAL:			ALL DIMENSIONS APPLY AFTER PLATING									
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.					DRAWN BY	DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL		DATE	
					TIM RAU	6/9/99						
					CHECKER	DATE	WEIGHT APPROX. 21 LBS.	CODE IDENT. NO. 83008	DWG. NO.		D 031-5006	
					ENGINEER	DATE	SCALE 1 = 1	SHEET 1 OF 1				