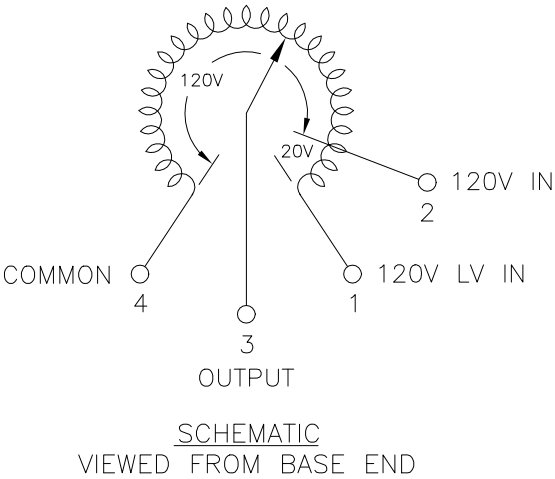
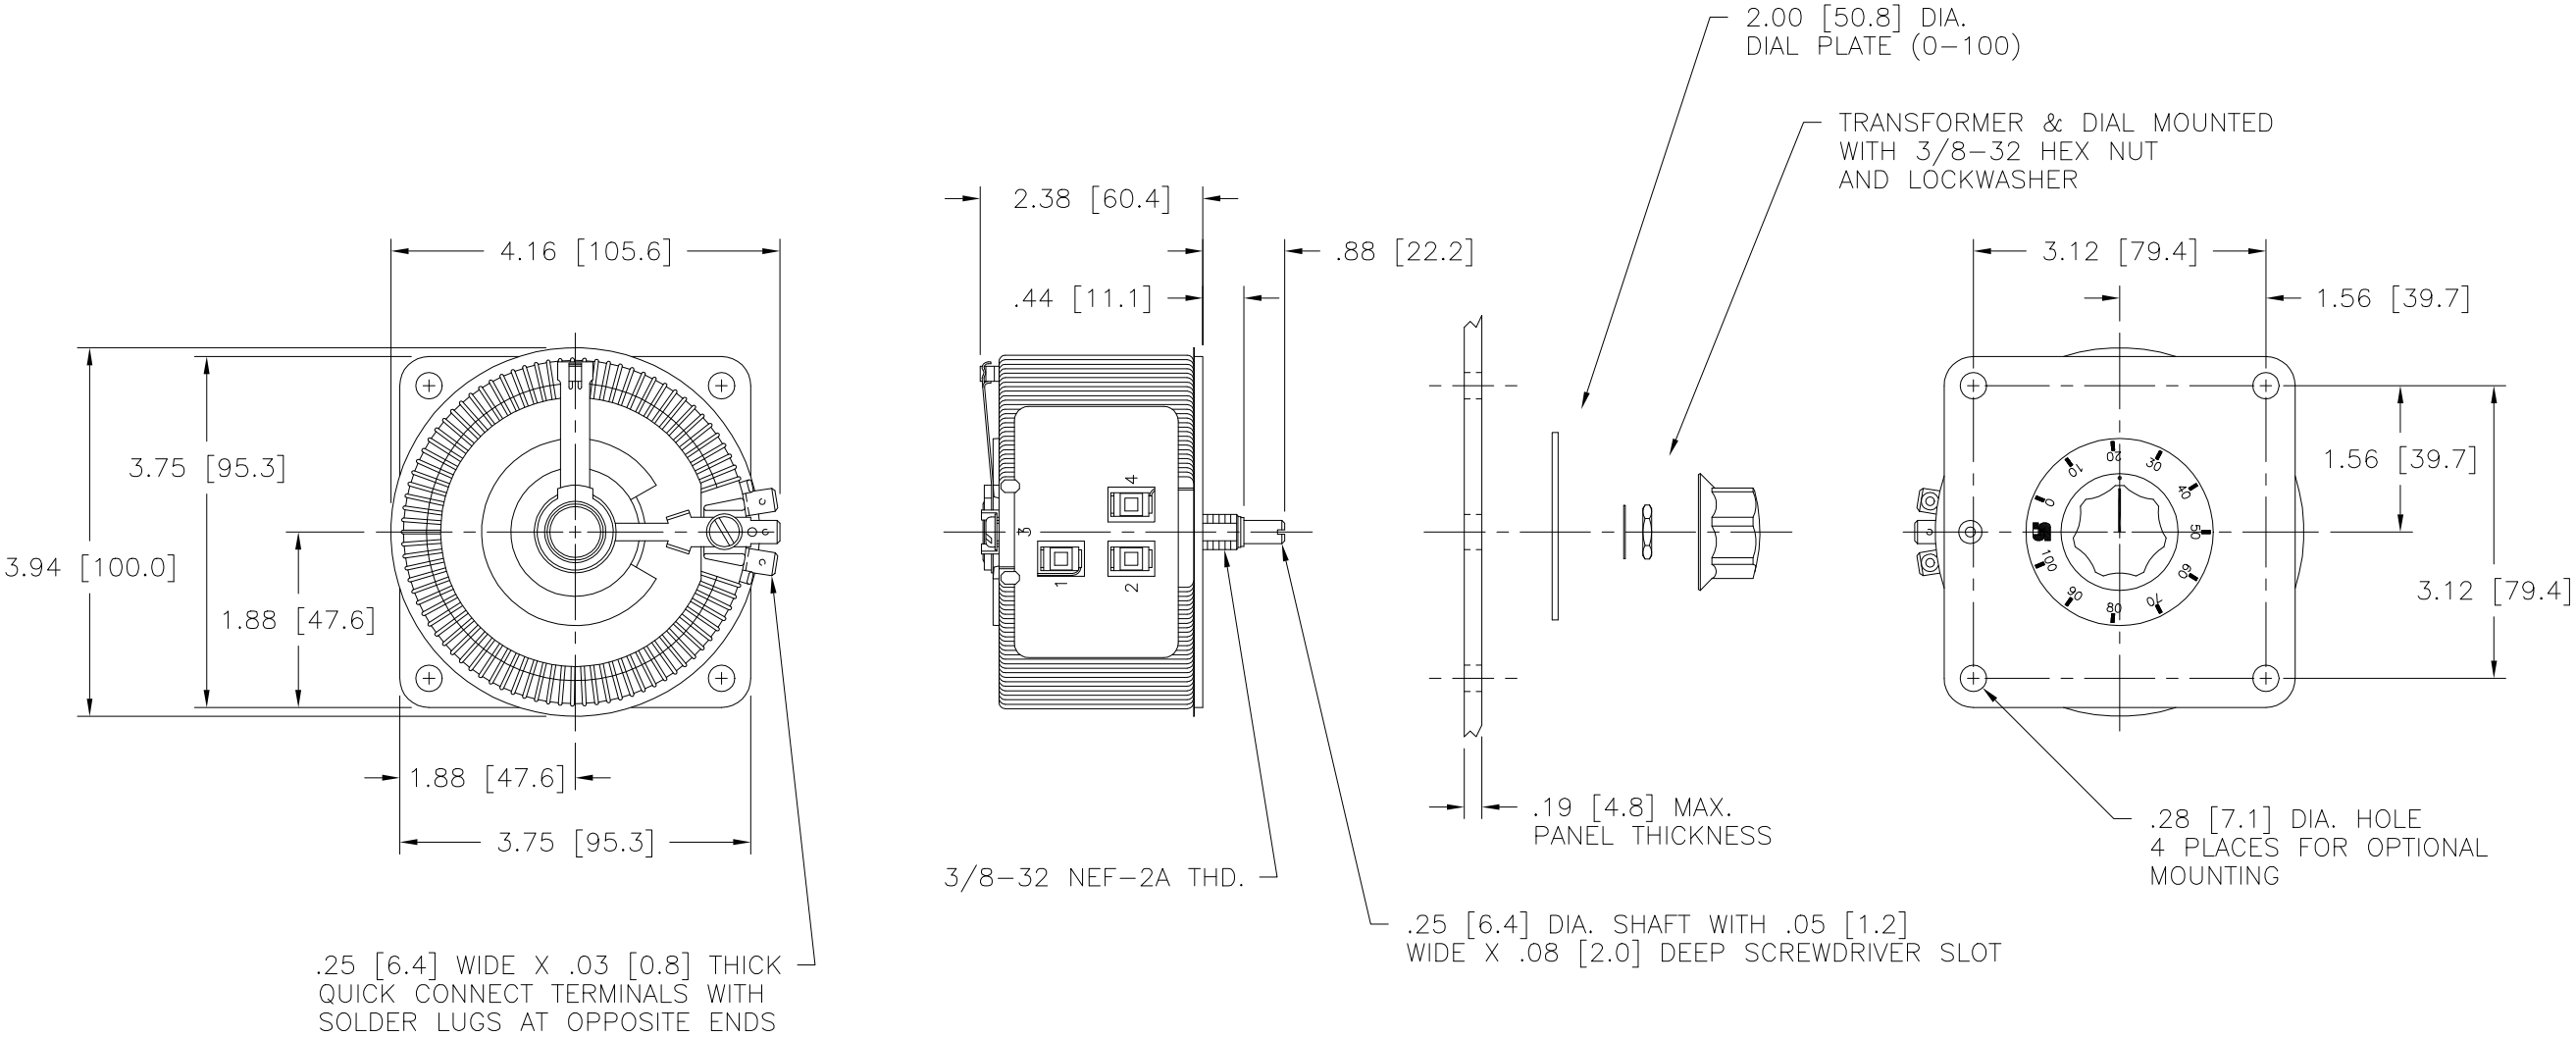


SPECIFICATIONS									
WIRING	INPUT		VOLTS	OUTPUT				TERMINAL CONNECTIONS AS VIEWED FROM BASE END	
	VOLTS	HERTZ		CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD			
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	INPUT	OUTPUT
SINGLE PHASE	120	50/60	0-120	5.0	0.60	7.0	0.84	1-4	4-3
			0-140	5.0	0.70	-	-	4-2	4-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: 511						
DECIMALS .XX .0000 .06 .0002 .01 1° 1-1/2°									
MATERIAL: XXX .005			ALL DIMENSIONS APPLY AFTER PLATING						
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			DRAWN BY	DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL		DATE
			S.A. SMITH	2/6/96					
			CHECKER	DATE	WEIGHT APPROX. 4.25 LBS	CODE IDENT. NO. 83008	DWG. NO. 031-0825		
			ENGINEER	DATE	SCALE 1=1	SHEET 1 OF 1	D		