


State of the Art, Inc.

D55342/07 Thin Film Chip Resistor

1206 Size, Surface Mount, Solderable

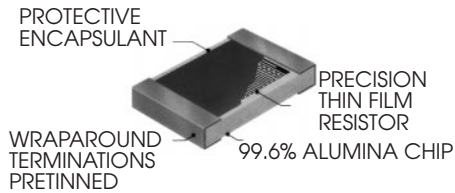

FEATURES

- Tolerances to $\pm 0.1\%$
- Operating temperature range : -55°C to $+150^{\circ}\text{C}$
- Pretinned (Sn60) nickel barrier terminations
- TCR's to ± 25 ppm
- Suitable for solder reflow, vapor phase, or wave solder attachment

PERFORMANCE CHARACTERISTICS

Resistance Range 5.6 Ω - 1M Ω
 Tolerances 0.1%, 1%, 2%, 5%, 10%
 Maximum Power 250 mW
 Maximum Voltage 100 Volts

ENVIRONMENTAL PERFORMANCE (3)


TCR (-55 to $+125^{\circ}\text{C}$ in ppm/ $^{\circ}\text{C}$) < 25 ppm
 Thermal Shock $\pm 0.02\%$
 Low Temperature Operation $\pm 0.02\%$
 Short-time Overload $\pm 0.02\%$
 Resistance to Bonding Exposure $\pm 0.02\%$
 Moisture Resistance $\pm 0.02\%$
 High Temperature Exposure $\pm 0.03\%$
 Life $\pm 0.03\%$

See Chart


- (1) Resistance range for 0.1% tolerance is 100 ohms to 1 M ohm.
- (2) Maximum Power for E and H TCR is 125 mW.
- (3) Typical Resistance change, the maximum is the same as MIL-PRF-55342. Test methods are per MIL-PRF-55342.

Solderability: Solder coating compatible with Sn60, 62 or 63 solders, provides good wetting with all types of solder attachment. All product is tested IAW Mil-Std-202, method 208, including 8 hour steam aging.


CURRENT NOISE




POWER DISSIPATION

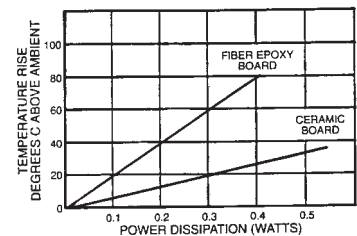

TYPICAL LIFE TEST PERFORMANCE



POWER DERATING

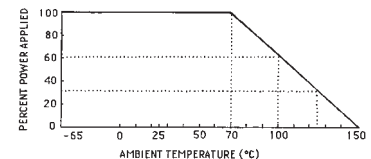

PART NUMBERING

D55342 H 07B 100D R

PRODUCT LEVEL DESIGNATOR*
 M: 1% per 1000 hrs. R: 0.01% per 1000 hrs.
 P: 0.1% per 1000 hrs T: Space Level
 C: Non - ER

RESISTANCE AND TOLERANCE CODE
 Three significant digits, with a letter indicating the decimal location, and the tolerance, and the value range (Ω , K Ω , M Ω)

A: 0.1% Ω	D: 1% Ω	G: 2% Ω	J: 5% Ω	M: 10% Ω
B: 0.1% K Ω	E: 1% K Ω	H: 2% K Ω	K: 5% K Ω	N: 10% K Ω
C: 0.1% M Ω	F: 1% M Ω	T: 2% M Ω	L: 5% M Ω	P: 10% M Ω

TCR
 E: ± 25 ppm H: ± 50 ppm K: ± 100 ppm

MECHANICAL

	INCHES	MM
Length	.126 (+.008/-0.008)	3.20 (+.20/- .20)
Width	.063 (± 0.005)	1.60 ($\pm .13$)
Thickness	.015 - .033	.38 - .84
Top Term.	.010 - .025	.25 - .64
Bottom Term.	.010 - .025	.25 - .64

Approx. Weight .0088 grams

PACKAGING

Two packaging options are available:

Waffle Pack - (140 per Tray Max.)
 Tape & Reel - (5000 per 8" Inch Reel Max.)

* PRODUCT LEVELS

All product levels are based on the same design as our "R" level failure rate Established Reliability part. Level C is a Non-Established Reliability part requiring no group A, B or C testing. Established Reliability (failure rates based on life testing) product levels M, P, and R are subject to group A, B and C testing per MIL-PRF-55342. Space product level T requires group A and B tests including 100% power conditioning.

OPTIONS

Termination type wraparound style (pretinned with a Ni barrier), and type W (wire bondable) are available. Also available in thick film MIL-PRF-55342 characteristic K & M. SOTA offers a full line of component parts in the 1206 size including Standard Grade, High-Reliability (customer specified testing), and zero-ohm jumpers. Custom part marking is also available.

STATE OF THE ART, INC. 2470 Fox Hill Road, State College, PA 16803-1797

Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

10/01/97

Where Quality Isn't a Goal...It's Our Tradition