

## Accessories for emergency pull-wire switches


### Indicator lamp 24 VAC DC

Material number: 1348797


#### Features/Options:

- Calotte red transparent
- M20 x 1.5
- 24 VAC/DC

#### Dimensions

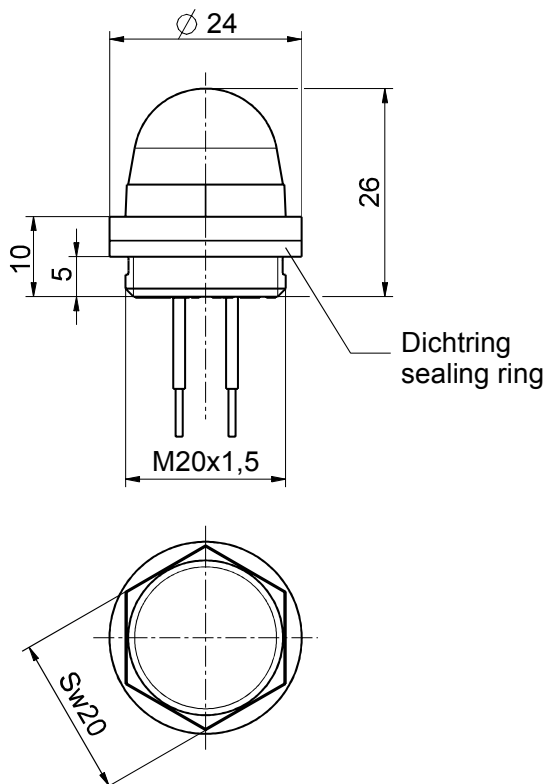

#### Technical data

Applied standards	EN 60947-5-1
Rated operating voltage range 24 VAC/DC $+10/-15\%$ $U_B$	
Rated operating current $I_e$	$\sim 15\text{ mA}$
Switch-on time ED	100 %
Lifetime	approx. 100,000 h (luminous flux on average decreased to 70 % of the initial value)
Lamp	LED
Calotte	polycarbonate, shock-proof, self-extinguishing UL 94 V-0, red transparent, similar to RAL 3000
Litz wire duct with strain relief	PA66, black, self-extinguishing UL 94 V-2
Tightening torque	indicator lamp: approx. 2.3 Nm
Mounting position	any
Sealing	EPDM
Connection	wire 2 x 0.9 mm <sup>2</sup> , AWG 18, wire length approx. 150 mm, with conductor ferrules
Ambient temperature	$-40\text{ °C} \dots +80\text{ °C}$
Degree of protection	IP 66/67 to IEC/EN 60529, in mounted condition
Thread	M20 x 1.5
Optic characteristics (weathering resistance)	Material of enclosure and sealing are weathering resistant. Material of enclosure and colour are UV stabilised.
Approvals	
Weight	11 g

Errors and omissions excepted.