


HZ1206E601R-10

UNCONTROLLED
DOCUMENT

PHYSICAL DIMENSIONS:

A	3.20 [.126]	+0.20 [.008]
B	1.60 [.063]	+0.20 [.008]
C	1.10 [.043]	+0.20 [.008]
D	0.51 [.020]	+0.25 [.010]


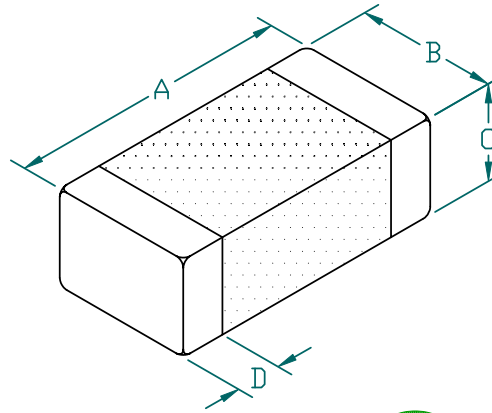


ELECTRICAL CHARACTERISTICS:


	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	600		
Minimum	450		
Maximum	750	0.300	500 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

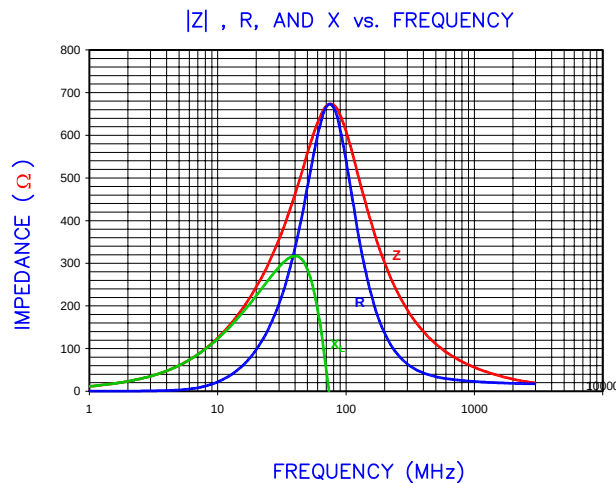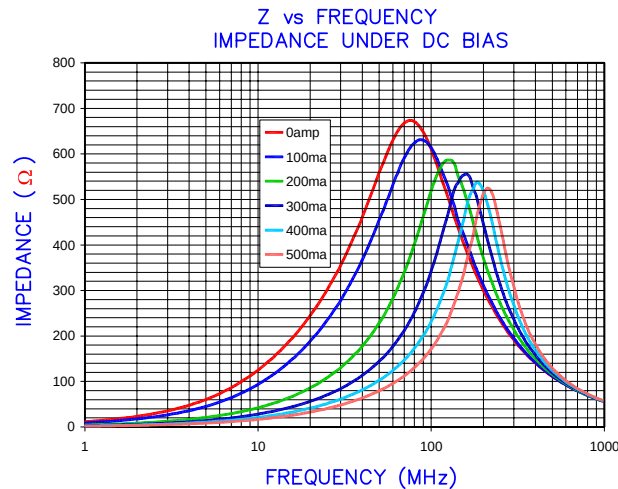


LAND PATTERNS FOR REFLOW SOLDERING

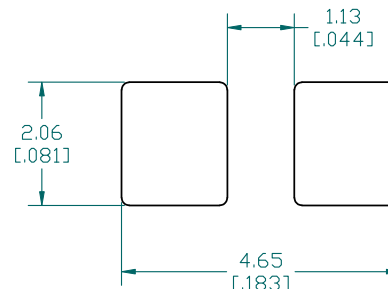

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

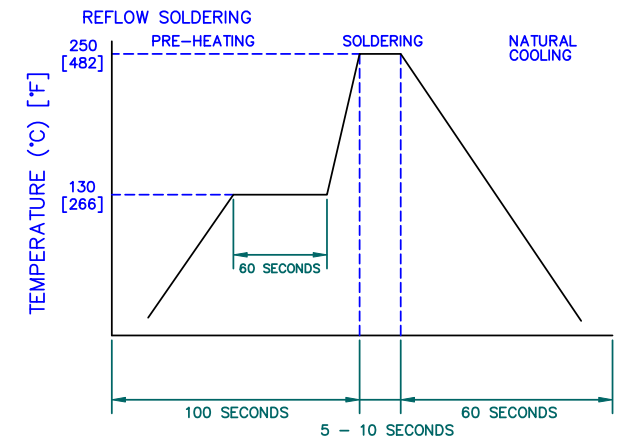

DIMENSIONS ARE IN mm [INCHES].

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
HZ1206E601R-10	A	CO-FIRE	TMB
DATE:	SCALE:	NTS	SHEET:
04/03/04	NTS		2 of 2
CAD #	TOOL #		
HZ1206E601R-10-A	-		