




# LD1117AXX12, LD1117AXX18, LD1117AXX33, LD1117AXX

## Low drop fixed and adjustable positive voltage regulators

### Features

- Low dropout voltage:
  - 1.15 V typ. @  $I_{OUT} = 1\text{ A}$ , 25 °C
- Very low quiescent current:
  - 5 mA typ. @ 25 °C
- Output current up to 1 A
- Fixed output voltage of:
  - 1.2 V, 1.8 V, 2.5 V, 3.3 V
- Adjustable version availability ( $V_{REF} = 1.25\text{ V}$ )
- Internal current and thermal limit
- Only 10  $\mu\text{F}$  for stability
- Available in  $\pm 2\%$  (at 25 °C) and 4% in full temperature range
- High supply voltage rejection:
  - 80 dB typ. (at 25 °C)
- Temperature range: 0 °C to 125 °C

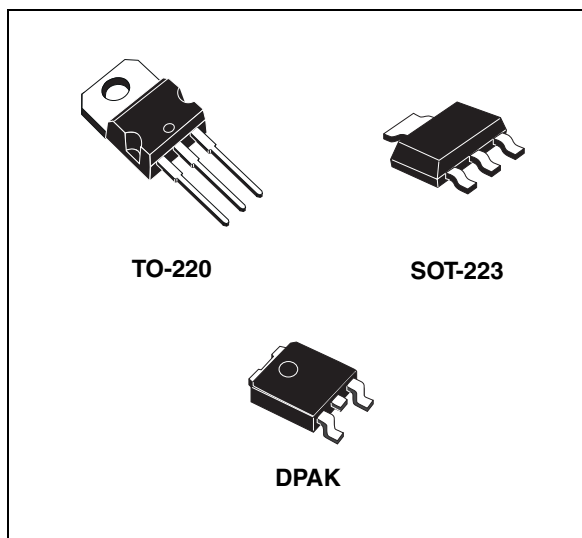

common 10  $\mu\text{F}$  minimum capacitor is needed for stability. Chip trimming allows the regulator to reach a very tight output voltage tolerance, within  $\pm 2\%$  at 25 °C.

### Description

The LD1117Axx is a low drop voltage regulator able to provide up to 1 A of output current, available also in adjustable versions ( $V_{REF} = 1.25\text{ V}$ ). In fixed versions, the following output voltages are offered: 1.2 V, 1.8 V, 2.5 V and 3.3 V. The device is supplied in: SOT-223, DPAK and TO-220. Surface mounted packages optimize the thermal characteristics while offering a relevant space saving advantage. High efficiency is assured by an NPN pass transistor. Only a very

**Table 1. Device summary**

| Order codes  |               |            | Output voltage         |
|--------------|---------------|------------|------------------------|
| SOT-223      | DPAK          | TO-220     |                        |
| LD1117AS12TR | LD1117ADT12TR |            | 1.2 V                  |
| LD1117AS18TR | LD1117ADT18TR |            | 1.8 V                  |
| LD1117AS33TR | LD1117ADT33TR | LD1117AV33 | 3.3 V                  |
| LD1117ASTR   | LD1117ADT-TR  |            | Adjustable from 1.25 V |

Contents

1      **Diagram** ..... 3

2      **Pin configuration** ..... 4

3      **Maximum ratings** ..... 5

4      **Schematic application** ..... 6

5      **Electrical characteristics** ..... 7

6      **Typical application** ..... 11

7      **LD1117A adjustable: application note** ..... 14


8      **Package mechanical data** ..... 15

9      **Revision history** ..... 23




# 1 Diagram

Figure 1. Block diagram

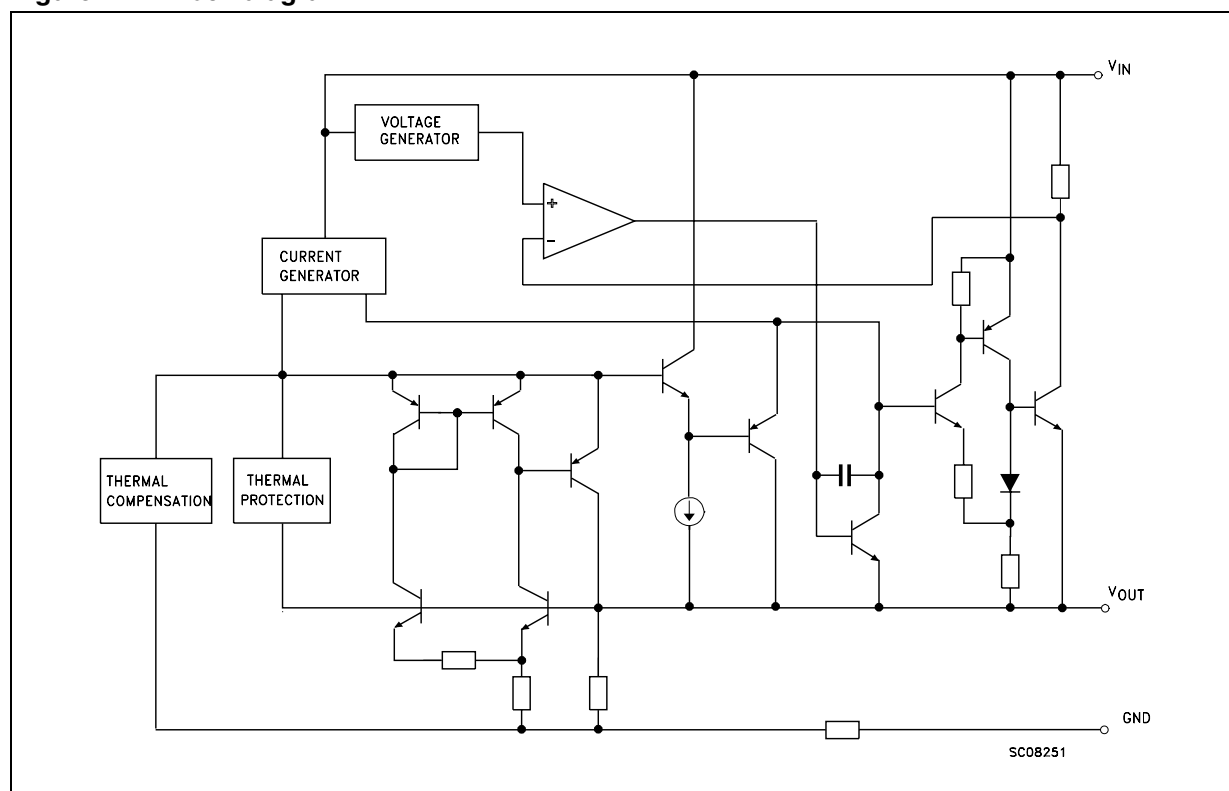

## 2 Pin configuration

Figure 2. Pin connections (top view)

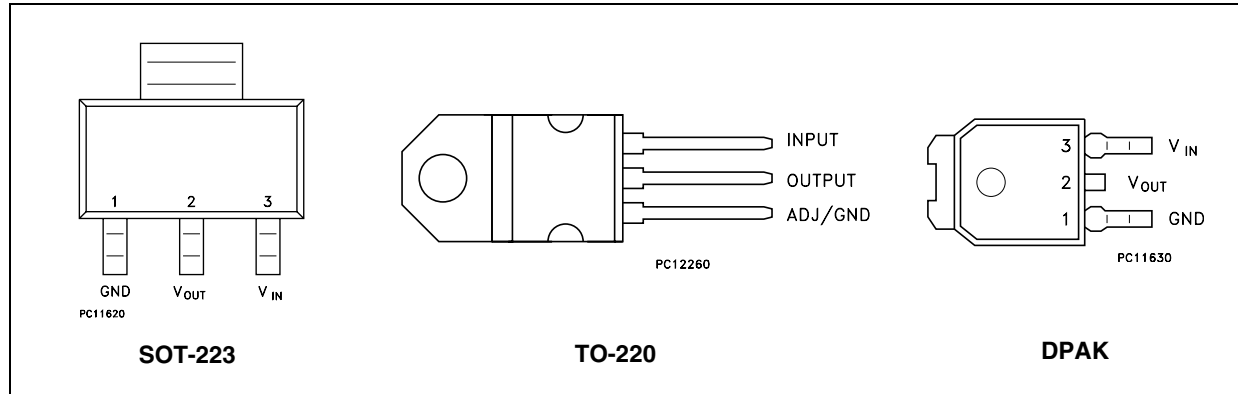

*Note:* The TAB is connected to the  $V_{OUT}$ .

### 3 Maximum ratings

**Table 2. Absolute maximum ratings**

| Symbol    | Parameter                            | Value       | Unit |
|-----------|--------------------------------------|-------------|------|
| $V_{IN}$  | DC input voltage                     | 15          | V    |
| $P_D$     | Power dissipation                    | 12          | W    |
| $T_{STG}$ | Storage temperature range            | -40 to +150 | °C   |
| $T_{OP}$  | Operating junction temperature range | 0 to +125   | °C   |


*Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied. Beyond the above suggested max. power dissipation, a short-circuit may permanently damage the device.*

**Table 3. Thermal data**

| Symbol     | Parameter                           | SOT-223 | DPAK | TO-220 | Unit |
|------------|-------------------------------------|---------|------|--------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 15      | 8    | 5      | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient |         |      | 50     | °C/W |

## 4 Schematic application

Figure 3. Application circuit (for other fixed output voltages)

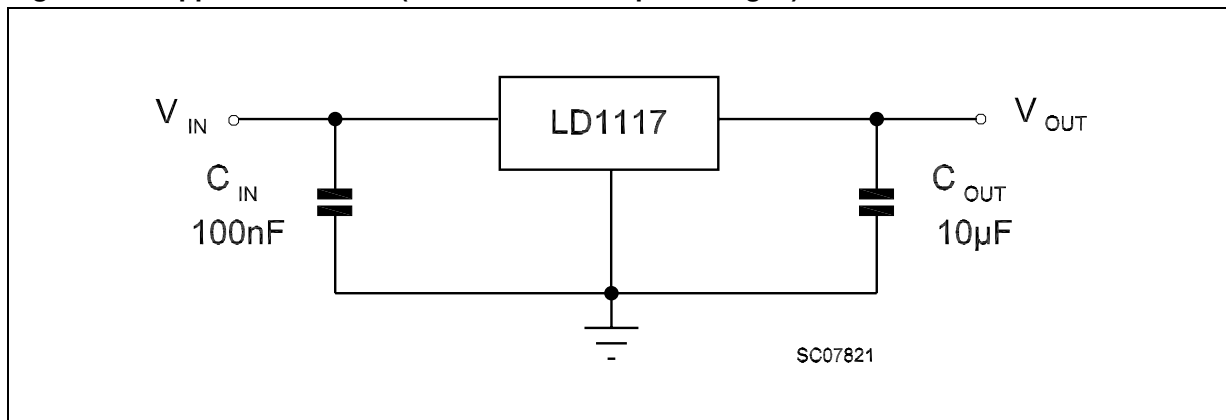

## 5 Electrical characteristics

Refer to the test circuits,  $T_J = 0$  to  $125\text{ }^{\circ}\text{C}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $C_I = 10\text{ }\mu\text{F}$ ,  $R = 120\text{ }\Omega$  between OUT-GND, unless otherwise specified.

**Table 4. Electrical characteristics of LD1117A#12**

| Symbol                     | Parameter                | Test conditions                                                                                                       | Min.  | Typ. | Max.  | Unit          |
|----------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$                      | Output voltage           | $V_I = 5.3\text{ V}$ , $I_O = 10\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                      | 1.176 | 1.2  | 1.224 | V             |
| $V_O$                      | Output voltage           | $I_O = 0$ to $1\text{ A}$ , $V_I = 2.75$ to $10\text{ V}$                                                             | 1.152 | 1.2  | 1.248 | V             |
| $\Delta V_O$               | Line regulation          | $V_I = 2.75$ to $8\text{ V}$ , $I_O = 0\text{ mA}$                                                                    |       | 1    | 6     | mV            |
| $\Delta V_O$               | Load regulation          | $V_I = 2.75\text{ V}$ , $I_O = 0$ to $1\text{ A}$                                                                     |       | 1    | 10    | mV            |
| $\Delta V_O$               | Temperature stability    |                                                                                                                       |       | 0.5  |       | %             |
| $\Delta V_O$               | Long term stability      | 1000 hrs, $T_J = 125\text{ }^{\circ}\text{C}$                                                                         |       | 0.3  |       | %             |
| $V_I$                      | Operating input voltage  | $I_O = 100\text{ mA}$                                                                                                 |       |      | 10    | V             |
| $I_d$                      | Quiescent current        | $V_I \leq 8\text{ V}$ , $I_O = 0\text{ mA}$                                                                           |       | 5    | 10    | mA            |
| $I_O$                      | Output current           | $V_I - V_O = 5\text{ V}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                         | 1000  | 1200 |       | mA            |
| eN                         | Output noise voltage     | $B = 10\text{ Hz}$ to $10\text{ kHz}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                            |       | 100  |       | $\mu\text{V}$ |
| SVR                        | Supply voltage rejection | $I_O = 40\text{ mA}$ , $f = 120\text{ Hz}$<br>$V_I - V_O = 3\text{ V}$ , $V_{\text{ripple}} = 1\text{ V}_{\text{PP}}$ | 60    | 80   |       | dB            |
| $V_D$                      | Dropout voltage          | $I_O = 100\text{ mA}$                                                                                                 |       | 1    | 1.10  | V             |
|                            |                          | $I_O = 500\text{ mA}$                                                                                                 |       | 1.05 | 1.15  |               |
|                            |                          | $I_O = 1\text{ A}$                                                                                                    |       | 1.15 | 1.30  |               |
| $\Delta V_{O(\text{pwr})}$ | Thermal regulation       | $T_a = 25\text{ }^{\circ}\text{C}$ , 30 ms pulse                                                                      |       | 0.08 | 0.2   | %/W           |

Refer to the test circuits,  $T_J = 0$  to  $125\text{ }^{\circ}\text{C}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $C_I = 10\text{ }\mu\text{F}$ , unless otherwise specified.

**Table 5. Electrical characteristics of LD1117A#18**

| Symbol                     | Parameter                | Test conditions                                                                                                       | Min.  | Typ. | Max.  | Unit          |
|----------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$                      | Output voltage           | $V_I = 3.8\text{ V}$ , $I_O = 10\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                      | 1.764 | 1.8  | 1.836 | V             |
| $V_O$                      | Output voltage           | $I_O = 0$ to $1\text{ A}$ , $V_I = 3.3$ to $8\text{ V}$                                                               | 1.728 |      | 1.872 | V             |
| $\Delta V_O$               | Line regulation          | $V_I = 3.3$ to $8\text{ V}$ , $I_O = 0\text{ mA}$                                                                     |       | 1    | 6     | mV            |
| $\Delta V_O$               | Load regulation          | $V_I = 3.3\text{ V}$ , $I_O = 0$ to $1\text{ A}$                                                                      |       | 1    | 10    | mV            |
| $\Delta V_O$               | Temperature stability    |                                                                                                                       |       | 0.5  |       | %             |
| $\Delta V_O$               | Long term stability      | 1000 hrs, $T_J = 125\text{ }^{\circ}\text{C}$                                                                         |       | 0.3  |       | %             |
| $V_I$                      | Operating input voltage  | $I_O = 100\text{ mA}$                                                                                                 |       |      | 10    | V             |
| $I_d$                      | Quiescent current        | $V_I \leq 8\text{ V}$ , $I_O = 0\text{ mA}$                                                                           |       | 5    | 10    | mA            |
| $I_O$                      | Output current           | $V_I - V_O = 5\text{ V}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                         | 1000  |      |       | mA            |
| eN                         | Output noise voltage     | B = 10 Hz to 10 kHz, $T_J = 25\text{ }^{\circ}\text{C}$                                                               |       | 100  |       | $\mu\text{V}$ |
| SVR                        | Supply voltage rejection | $I_O = 40\text{ mA}$ , $f = 120\text{ Hz}$<br>$V_I - V_O = 3\text{ V}$ , $V_{\text{ripple}} = 1\text{ V}_{\text{PP}}$ | 60    | 80   |       | dB            |
| $V_D$                      | Dropout voltage          | $I_O = 100\text{ mA}$                                                                                                 |       | 1    | 1.10  | V             |
|                            |                          | $I_O = 500\text{ mA}$                                                                                                 |       | 1.05 | 1.15  |               |
|                            |                          | $I_O = 1\text{ A}$                                                                                                    |       | 1.15 | 1.30  |               |
| $\Delta V_{O(\text{pwr})}$ | Thermal regulation       | $T_a = 25\text{ }^{\circ}\text{C}$ , 30 ms pulse                                                                      |       | 0.08 | 0.2   | %/W           |



Refer to the test circuits,  $T_J = 0$  to  $125\text{ }^{\circ}\text{C}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $C_I = 10\text{ }\mu\text{F}$ , unless otherwise specified.

**Table 6. Electrical characteristics of LD1117A#33**

| Symbol                     | Parameter                | Test conditions                                                                                                       | Min.  | Typ. | Max.  | Unit          |
|----------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$                      | Output voltage           | $V_I = 5.3\text{ V}$ , $I_O = 10\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                      | 3.234 | 3.3  | 3.366 | V             |
| $V_O$                      | Output voltage           | $I_O = 0$ to $1\text{ A}$ , $V_I = 4.75$ to $10\text{ V}$                                                             | 3.168 |      | 3.432 | V             |
| $\Delta V_O$               | Line regulation          | $V_I = 4.75$ to $8\text{ V}$ , $I_O = 0\text{ mA}$                                                                    |       | 1    | 6     | mV            |
| $\Delta V_O$               | Load regulation          | $V_I = 4.75\text{ V}$ , $I_O = 0$ to $1\text{ A}$                                                                     |       | 1    | 10    | mV            |
| $\Delta V_O$               | Temperature stability    |                                                                                                                       |       | 0.5  |       | %             |
| $\Delta V_O$               | Long term stability      | 1000 hrs, $T_J = 125\text{ }^{\circ}\text{C}$                                                                         |       | 0.3  |       | %             |
| $V_I$                      | Operating input voltage  | $I_O = 100\text{ mA}$                                                                                                 |       |      | 10    | V             |
| $I_d$                      | Quiescent current        | $V_I \leq 10\text{ V}$ , $I_O = 0\text{ mA}$                                                                          |       | 5    | 10    | mA            |
| $I_O$                      | Output current           | $V_I - V_O = 5\text{ V}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                         | 1000  | 1200 |       | mA            |
| eN                         | Output noise voltage     | $B = 10\text{ Hz}$ to $10\text{ kHz}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                            |       | 100  |       | $\mu\text{V}$ |
| SVR                        | Supply voltage rejection | $I_O = 40\text{ mA}$ , $f = 120\text{ Hz}$<br>$V_I - V_O = 3\text{ V}$ , $V_{\text{ripple}} = 1\text{ V}_{\text{PP}}$ | 60    | 75   |       | dB            |
| $V_D$                      | Dropout voltage          | $I_O = 100\text{ mA}$                                                                                                 |       | 1    | 1.10  | V             |
|                            |                          | $I_O = 500\text{ mA}$                                                                                                 |       | 1.05 | 1.15  |               |
|                            |                          | $I_O = 1\text{ A}$                                                                                                    |       | 1.15 | 1.30  |               |
| $\Delta V_{O(\text{pwr})}$ | Thermal regulation       | $T_a = 25\text{ }^{\circ}\text{C}$ , 30 ms pulse                                                                      |       | 0.08 | 0.2   | %/W           |

Refer to the test circuits,  $T_J = 0$  to  $125\text{ }^{\circ}\text{C}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $C_I = 10\text{ }\mu\text{F}$ , unless otherwise specified.

**Table 7. Electrical characteristics of LD1117A (Adjustable)**

| Symbol                     | Parameter                     | Test conditions                                                                                                       | Min.  | Typ. | Max.  | Unit          |
|----------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$                      | Reference voltage             | $V_I = 5.3\text{ V}$ , $I_O = 10\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                      | 1.225 | 1.25 | 1.275 | V             |
| $V_O$                      | Reference voltage             | $I_O = 10\text{ mA}$ to $1\text{ A}$ , $V_I = 2.75$ to $10\text{ V}$                                                  | 1.2   |      | 1.3   | V             |
| $\Delta V_O$               | Line regulation               | $V_I = 2.75$ to $8\text{ V}$ , $I_O = 0\text{ mA}$                                                                    |       | 1    | 6     | mV            |
| $\Delta V_O$               | Load regulation               | $V_I = 2.75\text{ V}$ , $I_O = 0$ to $1\text{ A}$                                                                     |       | 1    | 10    | mV            |
| $\Delta V_O$               | Temperature stability         |                                                                                                                       |       | 0.5  |       | %             |
| $\Delta V_O$               | Long term stability           | 1000 hrs, $T_J = 125\text{ }^{\circ}\text{C}$                                                                         |       | 0.3  |       | %             |
| $V_I$                      | Operating input voltage       | $I_O = 100\text{ mA}$                                                                                                 |       |      | 10    | V             |
| $I_{\text{adj}}$           | Adjustment pin current        | $V_{\text{in}} \leq 10\text{ V}$                                                                                      |       | 60   | 120   | $\mu\text{A}$ |
| $\Delta I_{\text{adj}}$    | Adjustment pin current change | $V_{\text{in}} - V_O = 1.4$ to $10\text{ V}$ , $I_O = 10\text{ mA}$ to $1\text{ A}$                                   |       | 1    | 5     | $\mu\text{A}$ |
| $I_{O(\text{min})}$        | Minimum load current          | $V_{\text{in}} = 10\text{ V}$                                                                                         |       | 2    | 5     | mA            |
| $I_O$                      | Output current                | $V_I - V_O = 5\text{ V}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                         | 1000  | 1200 |       | mA            |
| eN                         | Output noise voltage          | $B = 10\text{ Hz}$ to $10\text{ kHz}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                            |       | 100  |       | $\mu\text{V}$ |
| SVR                        | Supply voltage rejection      | $I_O = 40\text{ mA}$ , $f = 120\text{ Hz}$<br>$V_I - V_O = 3\text{ V}$ , $V_{\text{ripple}} = 1\text{ V}_{\text{PP}}$ | 60    | 80   |       | dB            |
| $V_D$                      | Dropout voltage               | $I_O = 100\text{ mA}$                                                                                                 |       | 1    | 1.10  | V             |
|                            |                               | $I_O = 500\text{ mA}$                                                                                                 |       | 1.05 | 1.15  |               |
|                            |                               | $I_O = 1\text{ A}$                                                                                                    |       | 1.15 | 1.30  |               |
| $\Delta V_{O(\text{pwr})}$ | Thermal regulation            | $T_a = 25\text{ }^{\circ}\text{C}$ , 30 ms pulse                                                                      |       | 0.08 | 0.2   | %/W           |

## 6 Typical application

Figure 4. Negative supply

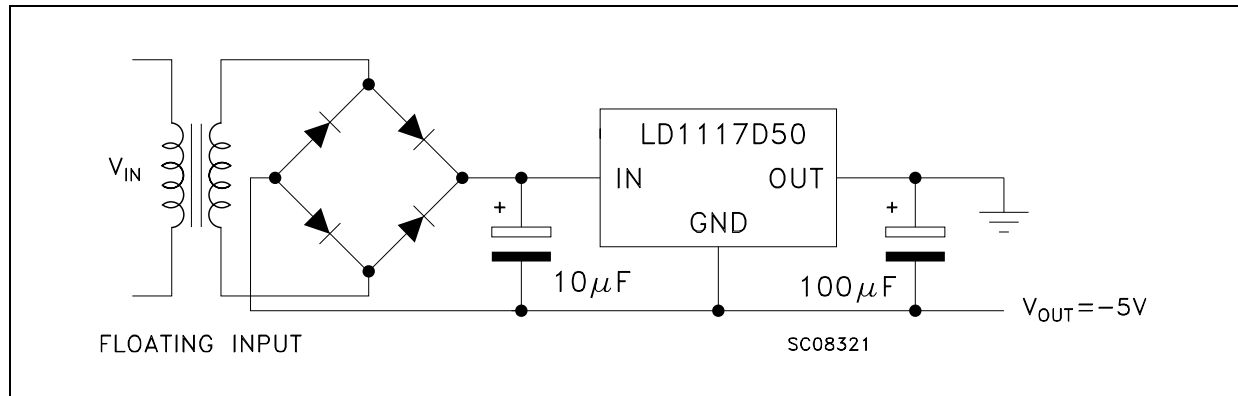


Figure 5. Active terminator for SCSI-2 bus


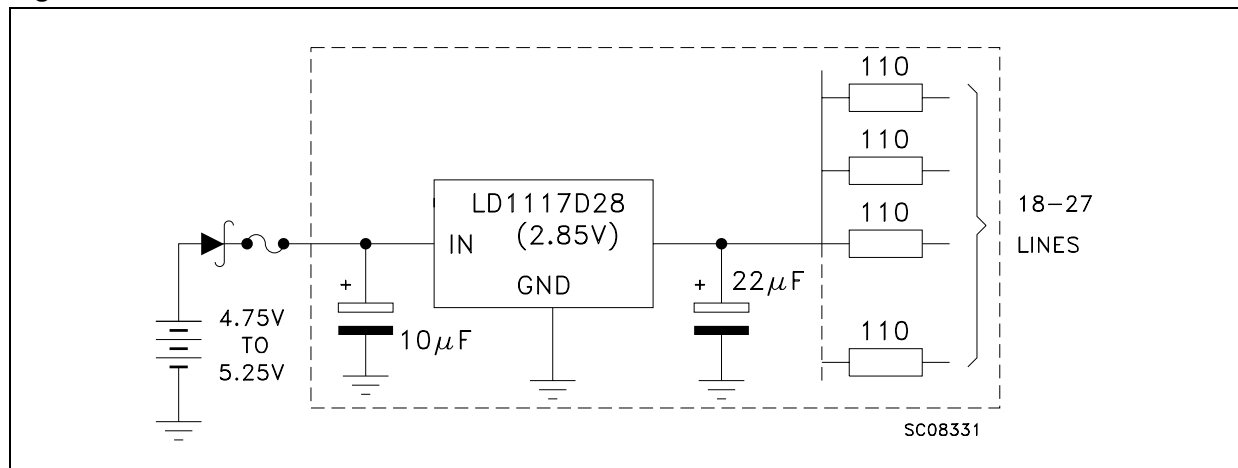


Figure 6. Circuit for increasing output voltage

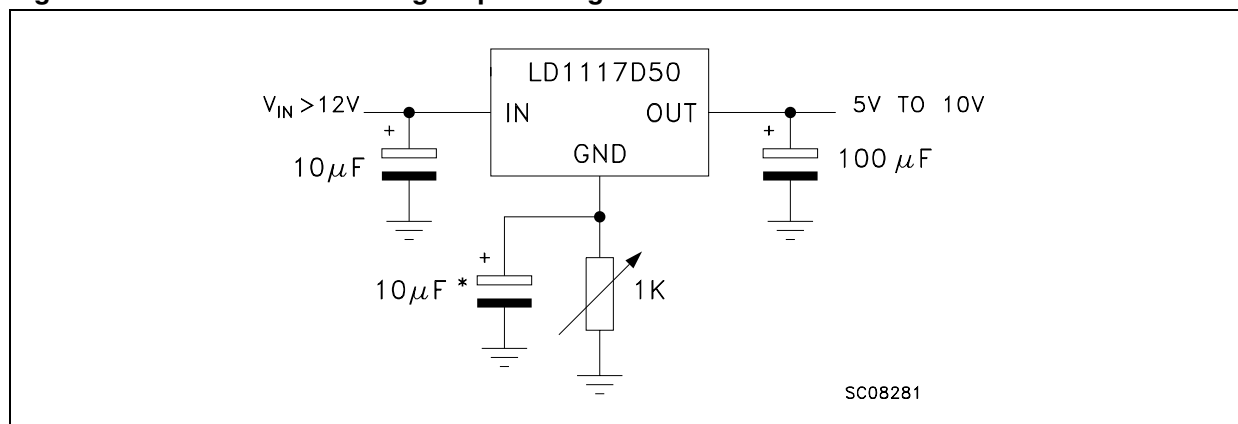

LD1117D50

IN OUT

GND

$V_{IN} > 11.5V$

$10\mu F$

$10V$


$100\mu F$

$5V_{OUT}$

SC08291

The diagram shows a circuit with two LD1117D50 voltage regulators. The top regulator's input is connected to  $V_{IN}$  through a diode and a  $10\mu F$  capacitor. Its output is the 5.2V LINE, which is also connected to a 5.0 BATTERY. The bottom regulator's input is connected to a 6.5V source through a resistor labeled "SELECT FOR CHARGE VALUE" and a  $10\mu F$  capacitor. Its output is connected to a  $100\mu F$  capacitor. Both regulators have a  $50\Omega$  resistor connected to ground. The identifier SC08301 is present in the bottom right.

Figure 9. Post-regulated dual supply

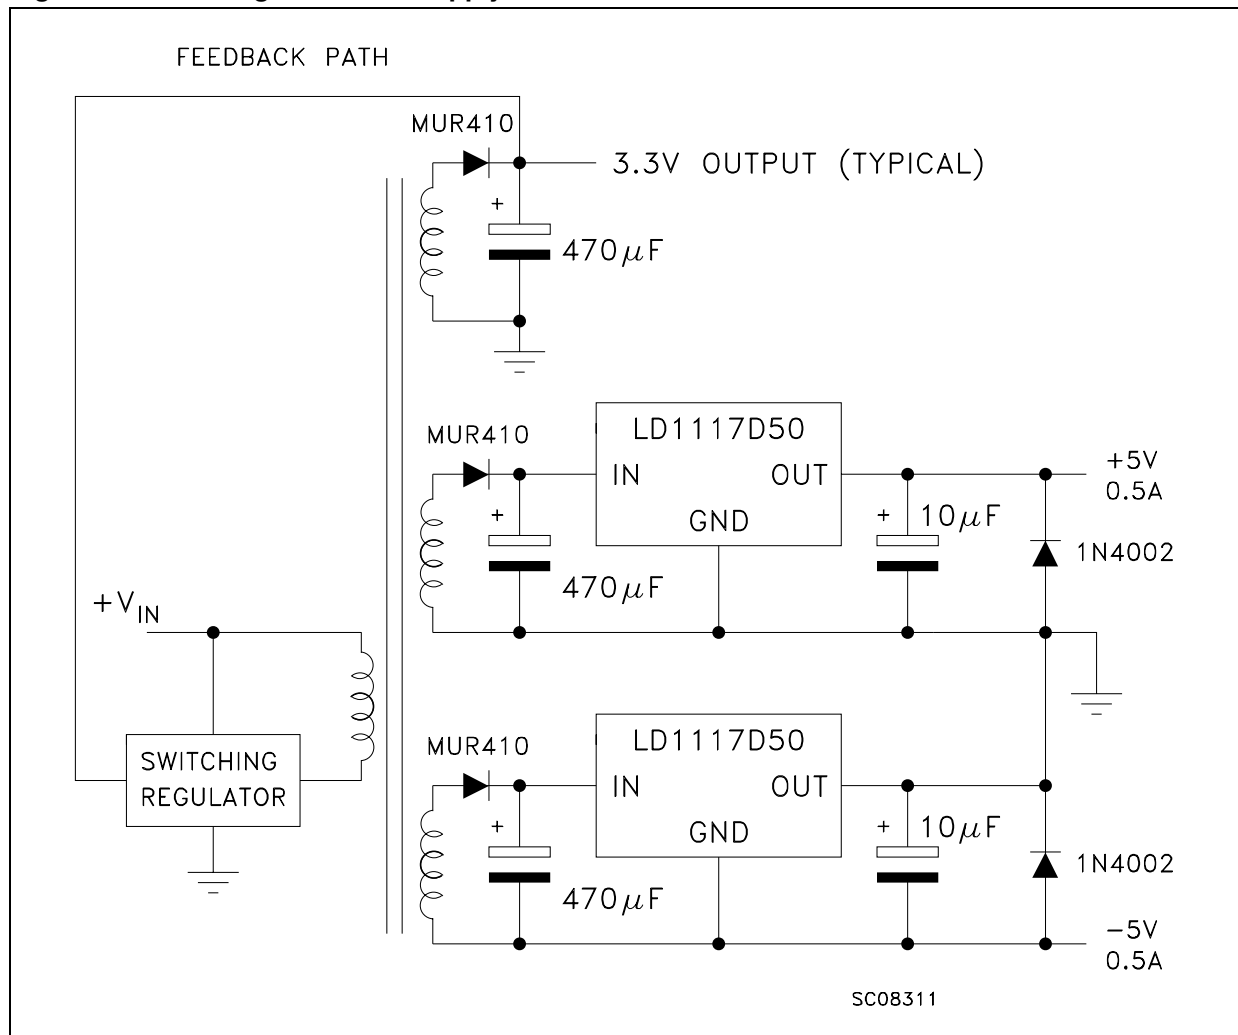

## 7 LD1117A adjustable: application note

The LD1117A adjustable has a thermal stabilized  $1.25 \pm 0.012$  V reference voltage between the OUT and ADJ pins.  $I_{ADJ}$  is 60  $\mu$ A typ. (120  $\mu$ A max.) and  $\Delta I_{ADJ}$  is 1  $\mu$ A typ. (5  $\mu$ A max.).

$R_1$  is normally fixed to 120  $\Omega$ . From [Figure 7](#) the following is obtained:


$$V_{OUT} = V_{REF} + R_2 (I_{ADJ} + I_{R1}) = V_{REF} + R_2 (I_{ADJ} + V_{REF} / R_1) = V_{REF} (1 + R_2 / R_1) + R_2 \times I_{ADJ}$$

In normal applications the  $R_2$  value is in the range of a few k $\Omega$ , so the  $R_2 \times I_{ADJ}$  product can not be considered in the  $V_{OUT}$  calculation; the above expression then becomes:


$$V_{OUT} = V_{REF} (1 + R_2 / R_1).$$

In order to have a better load regulation it is important to realize a good Kelvin connection of  $R_1$  and  $R_2$  resistors. In particular, the  $R_1$  connection must be realized very close to the OUT and ADJ pins, while the  $R_2$  ground connection must be placed as near as possible to the negative load pin. Ripple rejection can be improved by introducing a 10  $\mu$ F electrolytic capacitor placed in parallel to the  $R_2$  resistor (see [Figure 10](#)).

**Figure 10. Adjustable output voltage application**

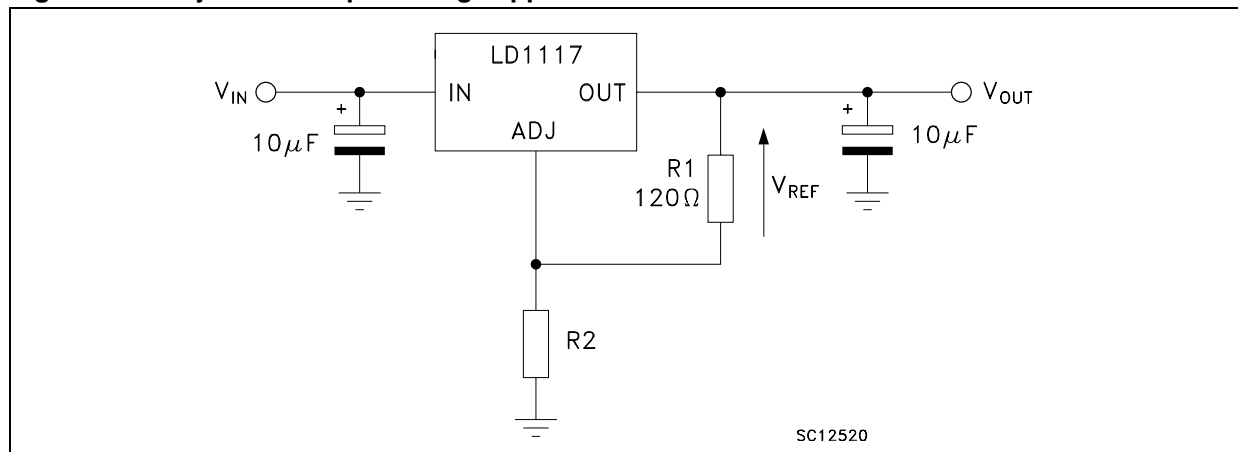

**Figure 11. Adjustable output voltage application with improved ripple rejection**

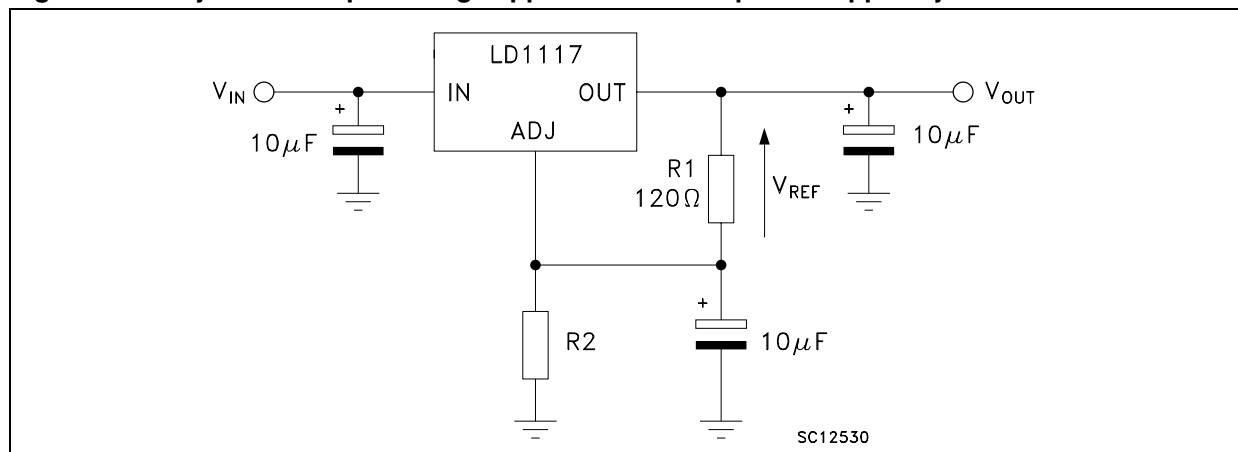

## 8 Package mechanical data


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

**Table 8. TO-220 mechanical data**

| Dim. | Type STD - ST Dual Gauge |       |       | Type STD - ST Single Gauge |       |       |
|------|--------------------------|-------|-------|----------------------------|-------|-------|
|      | mm.                      |       |       | mm.                        |       |       |
|      | Min.                     | Typ.  | Max.  | Min.                       | Typ.  | Max.  |
| A    | 4.40                     |       | 4.60  | 4.40                       |       | 4.60  |
| b    | 0.61                     |       | 0.88  | 0.61                       |       | 0.88  |
| b1   | 1.14                     |       | 1.70  | 1.14                       |       | 1.70  |
| c    | 0.48                     |       | 0.70  | 0.48                       |       | 0.70  |
| D    | 15.25                    |       | 15.75 | 15.25                      |       | 15.75 |
| D1   |                          | 1.27  |       |                            |       |       |
| E    | 10.00                    |       | 10.40 | 10.00                      |       | 10.40 |
| e    | 2.40                     |       | 2.70  | 2.40                       |       | 2.70  |
| e1   | 4.95                     |       | 5.15  | 4.95                       |       | 5.15  |
| F    | 1.23                     |       | 1.32  | 0.51                       |       | 0.60  |
| H1   | 6.20                     |       | 6.60  | 6.20                       |       | 6.60  |
| J1   | 2.40                     |       | 2.72  | 2.40                       |       | 2.72  |
| L    | 13.00                    |       | 14.00 | 13.00                      |       | 14.00 |
| L1   | 3.50                     |       | 3.93  | 3.50                       |       | 3.93  |
| L20  |                          | 16.40 |       |                            | 16.40 |       |
| L30  |                          | 28.90 |       |                            | 28.90 |       |
| ØP   | 3.75                     |       | 3.85  | 3.75                       |       | 3.85  |
| Q    | 2.65                     |       | 2.95  | 2.65                       |       | 2.95  |

*Despite some difference in tolerances, the packages are compatible.*

Figure 12. Drawing dimension TO-220 (type STD-ST Dual Gauge)

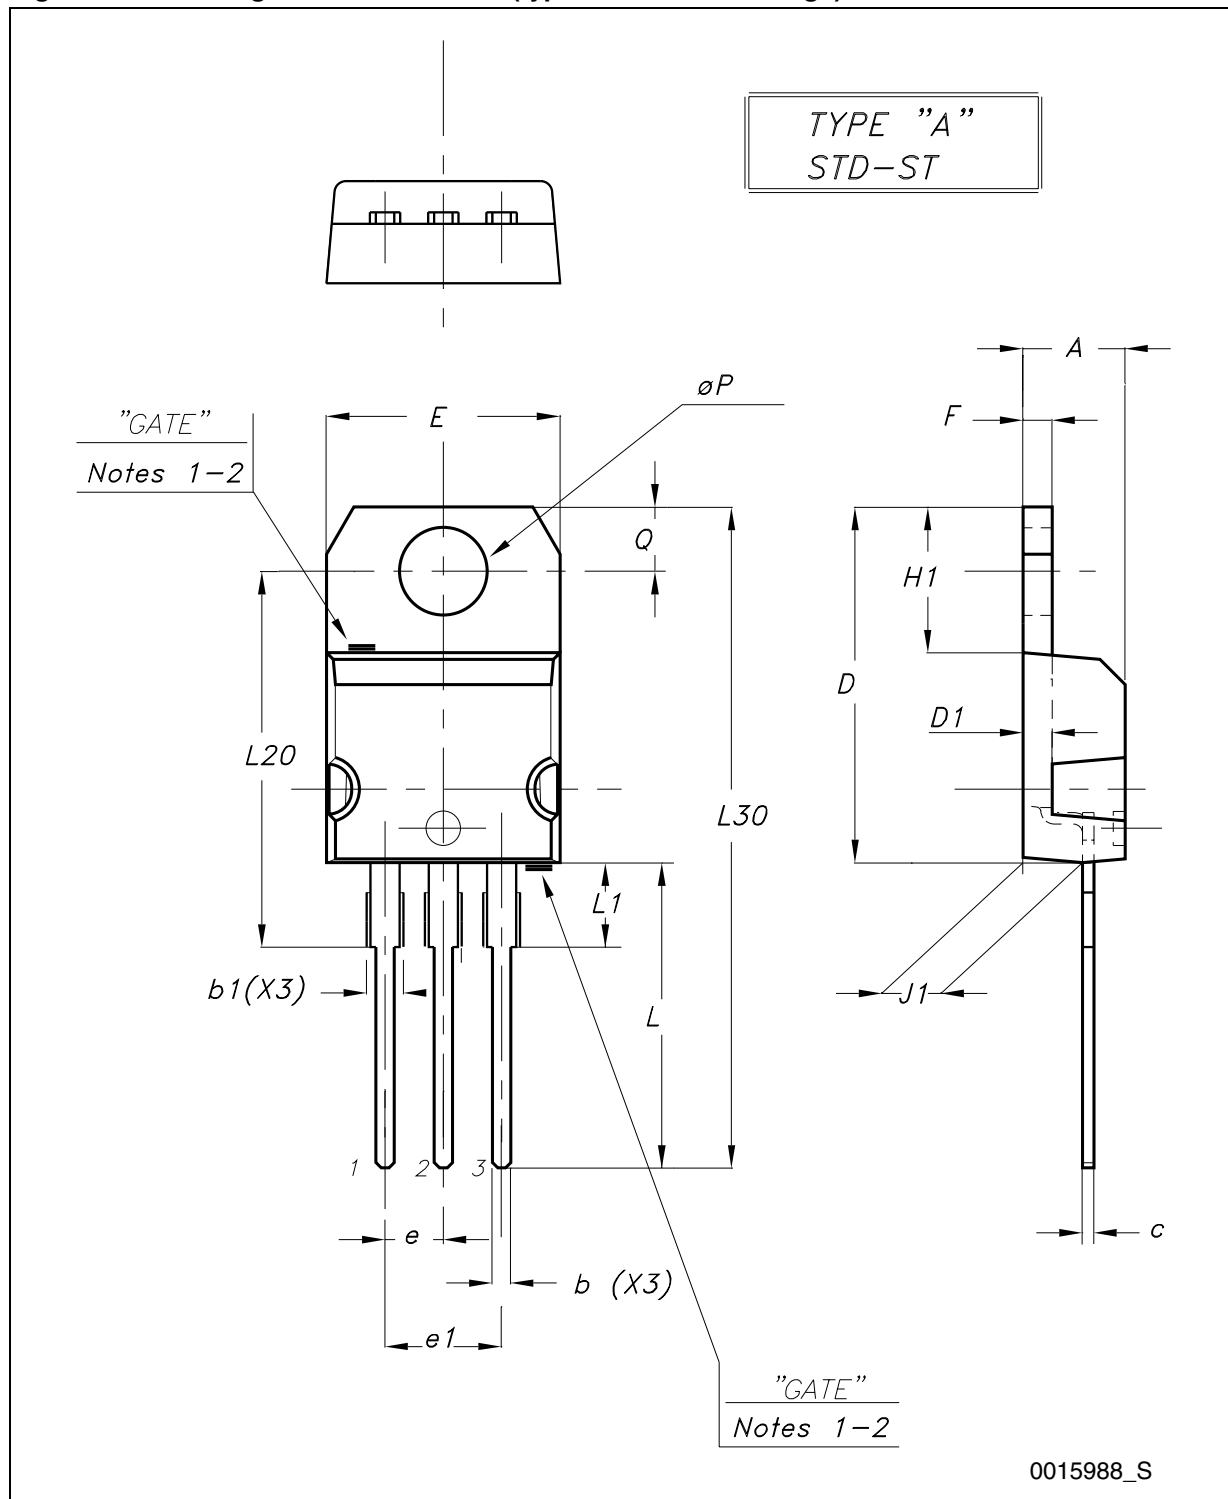

- Note: 1 Maximum resin gate protrusion: 0.5 mm.
- 2 An accepted resin gate protrusion can be found in each of the two positions shown on the drawing, or in their symmetrical position with respect to the vertical axis.



Figure 13. Drawing dimension TO-220 (type STD-ST Single Gauge)

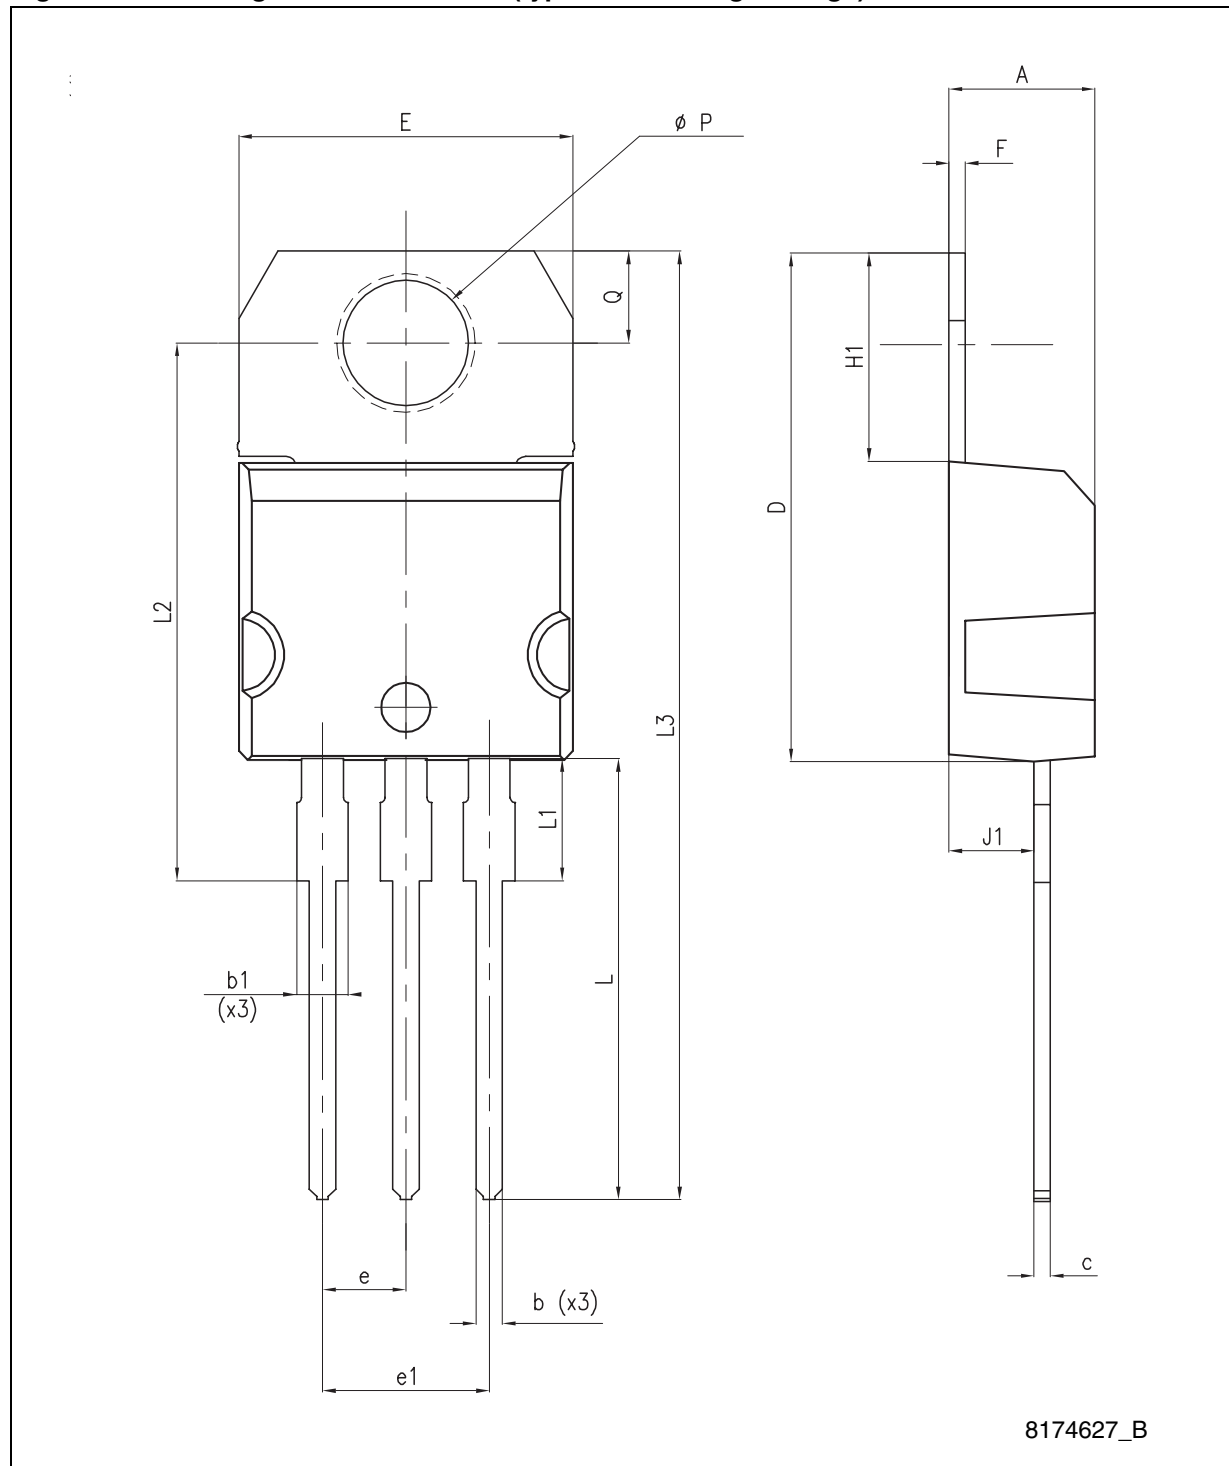


Figure 14. Drawing dimension tube for TO-220 Dual Gauge (mm.)



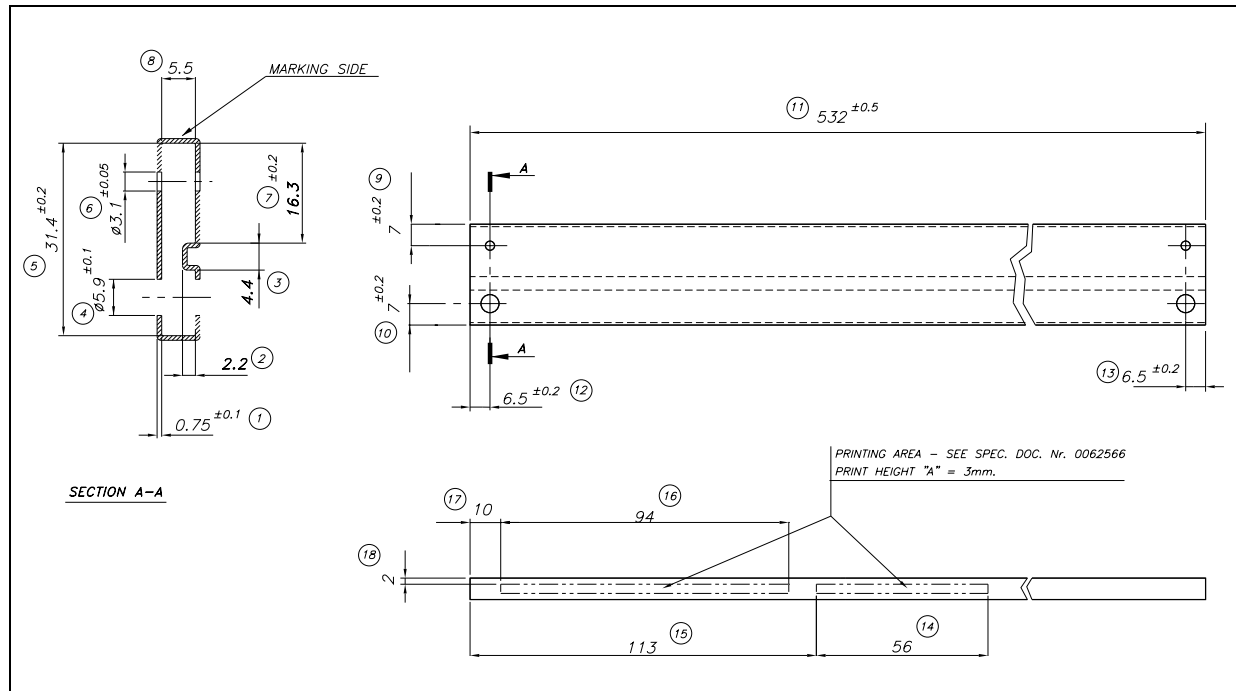


Figure 15. Drawing dimension tube for TO-220 Single Gauge (mm.)

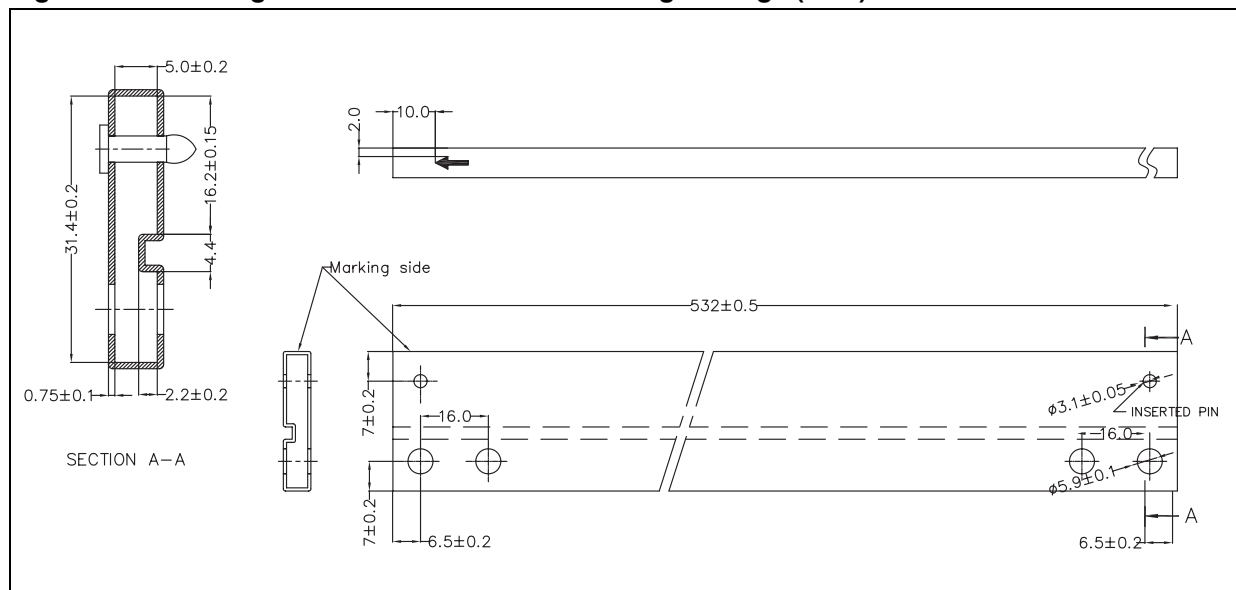

**SOT-223 mechanical data**


| Dim. | mm.  |      |      | mils. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    |      |      | 1.8  |       |       | 70.9  |
| A1   | 0.02 |      | 0.1  | 0.8   |       | 3.9   |
| B    | 0.6  | 0.7  | 0.85 | 23.6  | 27.6  | 33.5  |
| B1   | 2.9  | 3    | 3.15 | 114.2 | 118.1 | 124.0 |
| c    | 0.24 | 0.26 | 0.35 | 9.4   | 10.2  | 13.8  |
| D    | 6.3  | 6.5  | 6.7  | 248.0 | 255.9 | 263.8 |
| e    |      | 2.3  |      |       | 90.6  |       |
| e1   |      | 4.6  |      |       | 181.1 |       |
| E    | 3.3  | 3.5  | 3.7  | 129.9 | 137.8 | 145.7 |
| H    | 6.7  | 7    | 7.3  | 263.8 | 275.7 | 287.5 |
| V    |      |      | 10°  |       |       | 10°   |

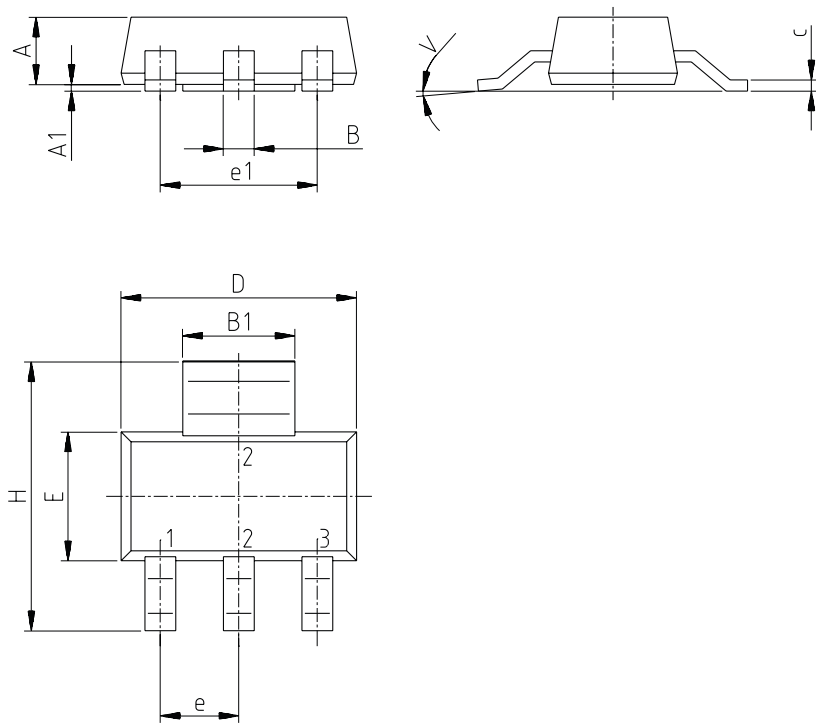

0046067/H

DPAK mechanical data


| Dim. | mm.  |      |      | inch. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    | 2.2  |      | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |      | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |      | 0.23 | 0.001 |       | 0.009 |
| B    | 0.64 |      | 0.9  | 0.025 |       | 0.035 |
| b4   | 5.2  |      | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |      | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |      | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |      | 6.2  | 0.236 |       | 0.244 |
| D1   |      | 5.1  |      |       | 0.200 |       |
| E    | 6.4  |      | 6.6  | 0.252 |       | 0.260 |
| E1   |      | 4.7  |      |       | 0.185 |       |
| e    |      | 2.28 |      |       | 0.090 |       |
| e1   | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| H    | 9.35 |      | 10.1 | 0.368 |       | 0.397 |
| L    | 1    |      |      | 0.039 |       |       |
| (L1) |      | 2.8  |      |       | 0.110 |       |
| L2   |      | 0.8  |      |       | 0.031 |       |
| L4   | 0.6  |      | 1    | 0.023 |       | 0.039 |
| R    |      | 0.2  |      |       | 0.008 |       |
| V2   | 0°   |      | 8°   | 0°    |       | 8°    |

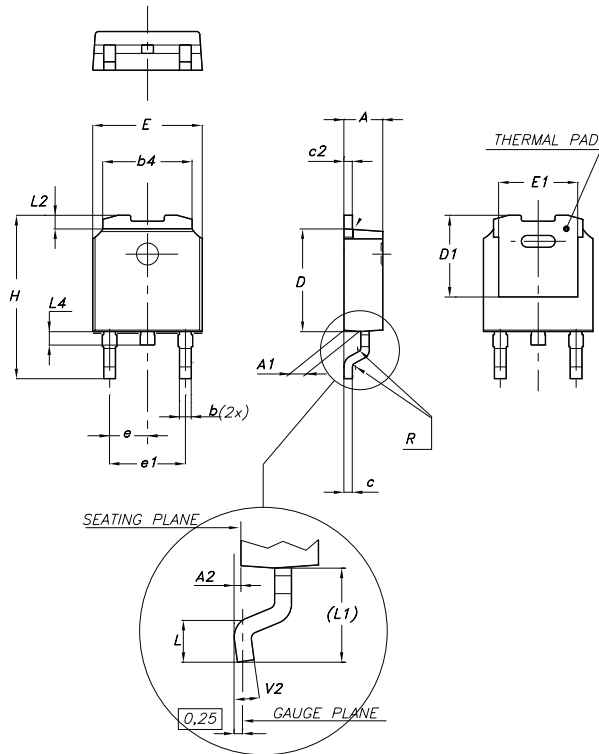

0068772-F


Tape & reel SOT223 mechanical data

| Dim. | mm.  |      |      | inch. |       |        |
|------|------|------|------|-------|-------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.   |
| A    |      |      | 330  |       |       | 12.992 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519  |
| D    | 20.2 |      |      | 0.795 |       |        |
| N    | 60   |      |      | 2.362 |       |        |
| T    |      |      | 14.4 |       |       | 0.567  |
| Ao   | 6.73 | 6.83 | 6.93 | 0.265 | 0.269 | 0.273  |
| Bo   | 7.32 | 7.42 | 7.52 | 0.288 | 0.292 | 0.296  |
| Ko   | 1.78 |      | 2    | 0.070 |       | 0.078  |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161  |
| P    | 7.9  | 8.0  | 8.1  | 0.311 | 0.315 | 0.319  |

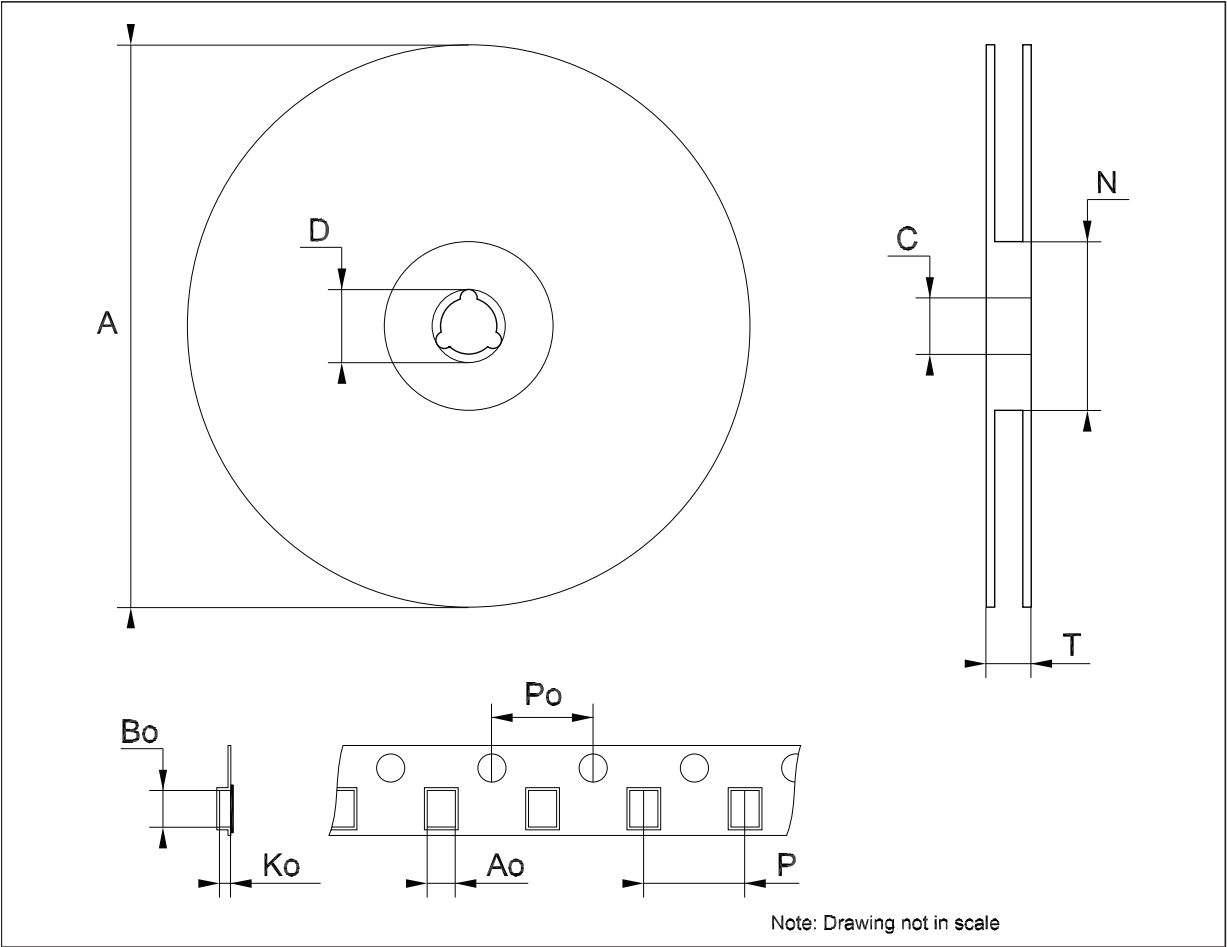

Tape & reel DPAK-PPAK mechanical data

| Dim. | mm.   |       |       | inch. |       |        |
|------|-------|-------|-------|-------|-------|--------|
|      | Min.  | Typ.  | Max.  | Min.  | Typ.  | Max.   |
| A    |       |       | 330   |       |       | 12.992 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519  |
| D    | 20.2  |       |       | 0.795 |       |        |
| N    | 60    |       |       | 2.362 |       |        |
| T    |       |       | 22.4  |       |       | 0.882  |
| Ao   | 6.80  | 6.90  | 7.00  | 0.268 | 0.272 | 0.276  |
| Bo   | 10.40 | 10.50 | 10.60 | 0.409 | 0.413 | 0.417  |
| Ko   | 2.55  | 2.65  | 2.75  | 0.100 | 0.104 | 0.105  |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161  |
| P    | 7.9   | 8.0   | 8.1   | 0.311 | 0.315 | 0.319  |

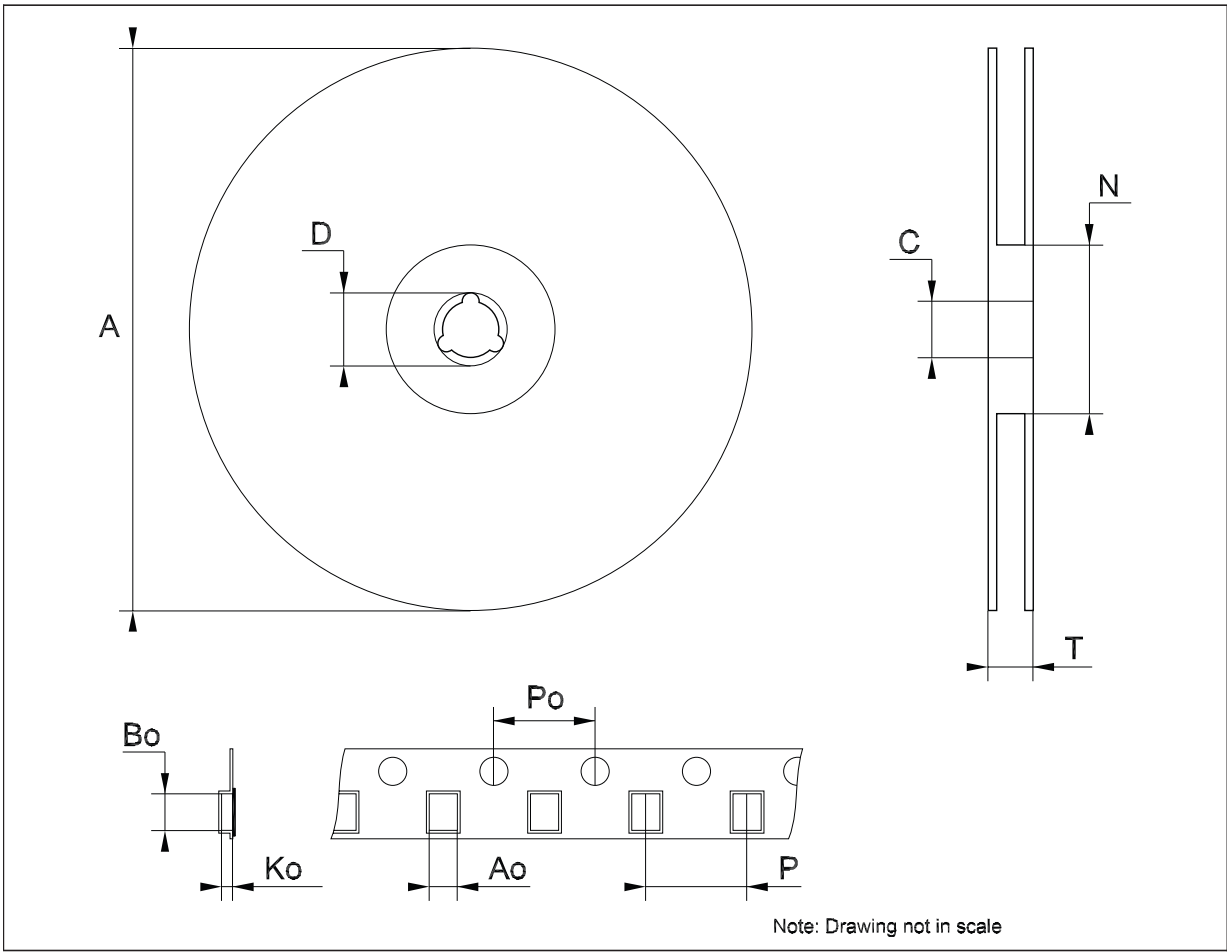

## 9 Revision history

**Table 9. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                        |
|-------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 29-Sep-2004 | 11       | Add new part number.                                                                                                                                                                           |
| 12-Oct-2004 | 12       | Mistake $V_O$ max. - Table 4.                                                                                                                                                                  |
| 21-Apr-2005 | 13       | Add new package - D <sup>2</sup> PAK/A.                                                                                                                                                        |
| 05-Jul-2005 | 14       | The DPAK mechanical data updated.                                                                                                                                                              |
| 10-Feb-2006 | 15       | Add new package - D <sup>2</sup> PAK/A (B type).                                                                                                                                               |
| 20-Dec-2006 | 16       | Change value $V_{IN}$ on <a href="#">Table 2</a> .                                                                                                                                             |
| 19-Jan-2007 | 17       | D <sup>2</sup> PAK/A mechanical data updated and add footprint data.                                                                                                                           |
| 28-May-2007 | 18       | Add $I_{ADJ}$ and $\Delta I_{ADJ}$ values on <a href="#">Table 7</a> .                                                                                                                         |
| 07-Jun-2007 | 19       | Add $I_{O(min)}$ value on <a href="#">Table 7</a> .                                                                                                                                            |
| 15-Apr-2008 | 20       | Modified: Table 10.                                                                                                                                                                            |
| 28-Jul-2009 | 21       | Modified: Table 10.                                                                                                                                                                            |
| 05-Jul-2010 | 22       | Added: <a href="#">Table 8 on page 15</a> , <a href="#">Figure 12 on page 16</a> , <a href="#">Figure 13 on page 17</a> , <a href="#">Figure 14</a> and <a href="#">Figure 15 on page 18</a> . |
| 16-Nov-2010 | 23       | Modified: <a href="#">Table 1 on page 1</a> , $R_{thJC}$ value for TO-220 <a href="#">Table 3 on page 5</a> .                                                                                  |
| 16-Dec-2011 | 24       | Modified: $V_O$ parameter output voltage ==> Reference voltage <a href="#">Table 7 on page 10</a> .                                                                                            |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)