

N-channel 80 V, 3.3 mΩ typ., 90 A STripFET™ VII DeepGATE™
Power MOSFET in TO-220FP, H²PAK-2 and TO-220 packages

Datasheet - production data

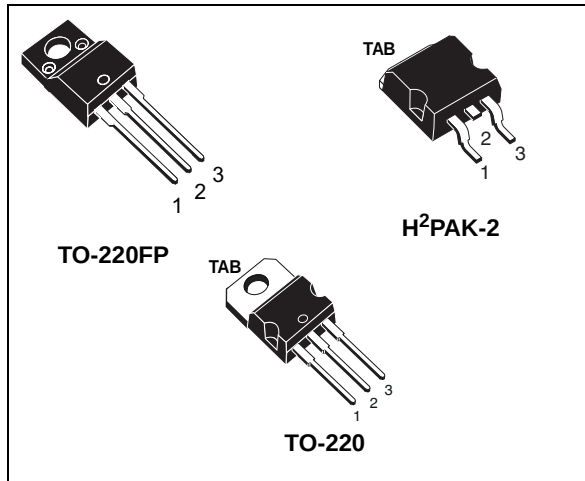
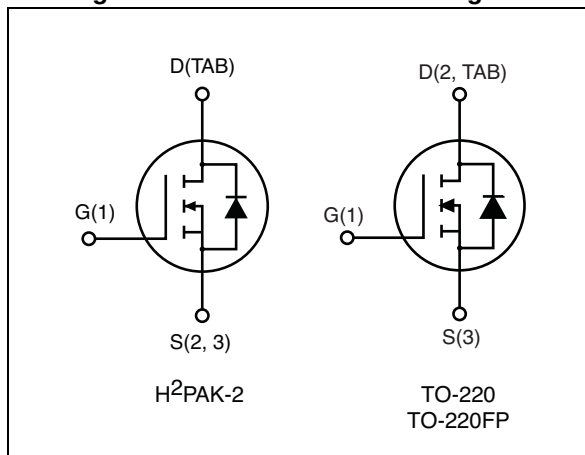


Figure 1. Internal schematic diagram



Features

Order code	V _{DS}	R _{DS(on)} max.	I _D	P _{TOT}
STF140N8F7	80 V	4.3 mΩ	64 A	35 W
STH140N8F7-2	80 V	4 mΩ	90 A	200 W
STP140N8F7	80 V	4.3 mΩ	90 A	200 W

- Ultra low on-resistance
- 100% avalanche tested

Applications

- Switching applications

Description

These devices are N-channel Power MOSFETs developed using the 7th generation of STripFET™ DeepGATE™ technology, with a new gate structure. The resulting Power MOSFETs exhibits the lowest R_{DS(on)} in all packages.

Table 1. Device summary

Order code	Marking	Package	Packaging
STF140N8F7	140N8F7	TO-220FP	Tube
STH140N8F7-2		H ² PAK-2	Tape and reel
STP140N8F7		TO-220	Tube

Contents

1 **Electrical ratings** **3**

2 **Electrical characteristics** **4**

 2.1 **Electrical characteristics (curves)** **6**

3 **Test circuits** **9**

4 **Package mechanical data** **10**

5 **Packaging mechanical data** **17**

6 **Revision history** **19**



1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value		Unit
		TO-220 H ² PAK-2	TO-220FP	
V _{DS}	Drain-source voltage	80		V
V _{GS}	Gate-source voltage	± 20		
I _D	Drain current (continuous) at T _C = 25 °C	90 ⁽¹⁾	64 ⁽²⁾	A
I _D	Drain current (continuous) at T _C = 100 °C	90 ⁽¹⁾	45 ⁽²⁾	
I _{DM} ⁽³⁾	Drain current (pulsed)	360	256	
P _{TOT} ⁽²⁾	Total dissipation at T _C = 25 °C	200	35	W
E _{AS} ⁽⁴⁾	Single pulse avalanche energy	515		mJ
T _j	Operating junction temperature	- 55 to 175		°C
T _{stg}	Storage temperature			

1. Limited by package
2. This value is rated according to R_{thj-c}
3. Pulse width is limited by safe operating area
4. Starting T_J = 25 °C, I_D = 18.5 A, V_{DD} = 50 V

Table 3. Thermal data

Symbol	Parameter	Value			Unit
		TO-220FP	TO-220	H ² PAK-2	
R _{thj-pcb} ⁽¹⁾	Thermal resistance junction-pcb			35	°C/W
R _{thj-case}	Thermal resistance junction-case	4.29	0.75		°C/W
R _{thj-amb}	thermal resistance junction-ambient	62.5			°C/W

1. When mounted on FR-4 board of 1 inch², 2oz Cu, t < 10 sec

2 Electrical characteristics

($T_{CASE} = 25\text{ °C}$ unless otherwise specified)

Table 4. On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage ($V_{GS} = 0$)	$I_D = 250\text{ }\mu\text{A}$	80			V
I_{DSS}	Zero gate voltage Drain current ($V_{GS} = 0$)	$V_{DS} = 80\text{ V}$ $V_{DS} = 80\text{ V}, T_J = 125\text{ °C}$			1 10	μA
I_{GSS}	Gate-source leakage current ($V_{DS} = 0$)	$V_{GS} = 20\text{ V}$			100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	2.5		4.5	V
$R_{DS(on)}$	Static drain-source on-resistance	For TO-220FP: $V_{GS} = 10\text{ V}, I_D = 32\text{ A}$		3.5	4.3	m Ω
		For H ² PAK-2: $V_{GS} = 10\text{ V}, I_D = 45\text{ A}$		3.3	4	
		For TO-220: $V_{GS} = 10\text{ V}, I_D = 45\text{ A}$		3.5	4.3	

Table 5. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	$V_{DS} = 40\text{ V}, f = 1\text{ MHz},$ $V_{GS} = 0$	-	6340	-	pF
C_{oss}	Output capacitance			1195		
C_{rss}	Reverse transfer capacitance			105		
Q_g	Total gate charge	$V_{DD} = 40\text{ V}, I_D = 64\text{ A},$ $V_{GS} = 10\text{ V}$	-	96	-	nC
Q_{gs}	Gate-source charge			30		
Q_{gd}	Gate-drain charge			26		

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 40\text{ V}, I_D = 45\text{ A}$ $R_G = 4.7\text{ }\Omega, V_{GS} = 10\text{ V}$	-	26	-	ns
t_r	Rise time			51		
$t_{d(off)}$	Turn-off-delay time			82		
t_f	Fall time			44		

Table 7. Source drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current	For H ² PAK-2 and TO-220 For TO-220FP	-		90 64	A
$I_{SDM}^{(1)}$	Source-drain current (pulsed)	For H ² PAK-2 and TO-220 For TO-220FP	-		360 256	
$V_{SD}^{(2)}$	Forward on voltage	For TO-220FP: $I_{SD} = 64\text{ A}$, $V_{GS} = 0$ For TO-220, H ² PAK-2: $I_{SD} = 90\text{ A}$, $V_{GS} = 0$	-		1.2	V
t_{rr}	Reverse recovery time	$I_{SD} = 64\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, $V_{DD} = 60\text{ V}$ $T_j = 150\text{ }^{\circ}\text{C}$	-	58		ns
Q_{rr}	Reverse recovery charge		-	92		nC
I_{RRM}	Reverse recovery current		-	3.2		A

1. Pulse width is limited by safe operating area
2. Pulse test: pulse duration = 300 μs , duty cycle 1.5%

2.1 Electrical characteristics (curves)

Figure 2. Safe operating area for TO-220FP

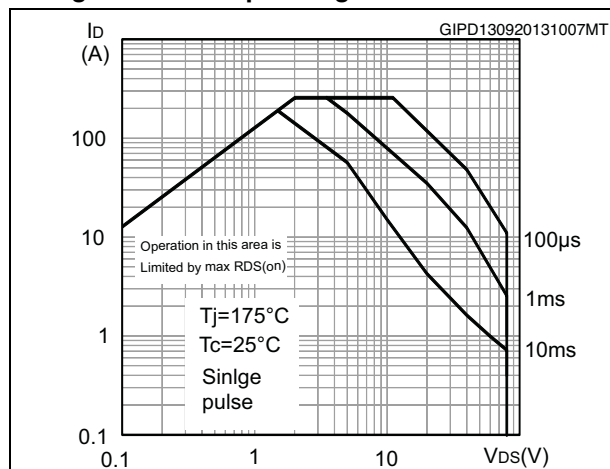


Figure 3. Thermal impedance for TO-220FP

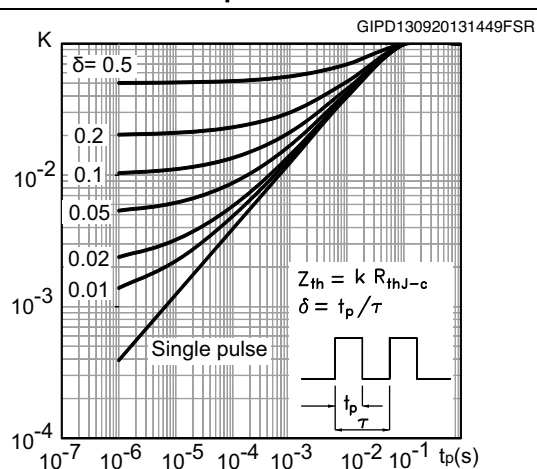
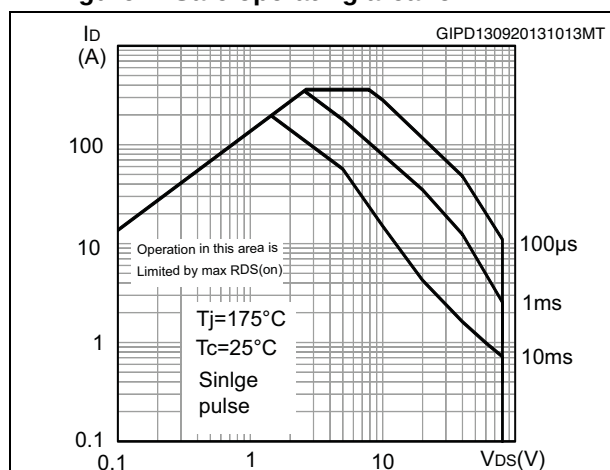
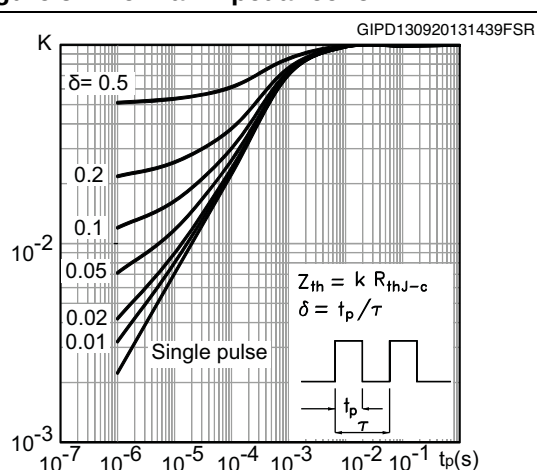
Figure 4. Safe operating area for H²PAK-2Figure 5. Thermal impedance for H²PAK-2

Figure 6. Safe operating area for TO-220

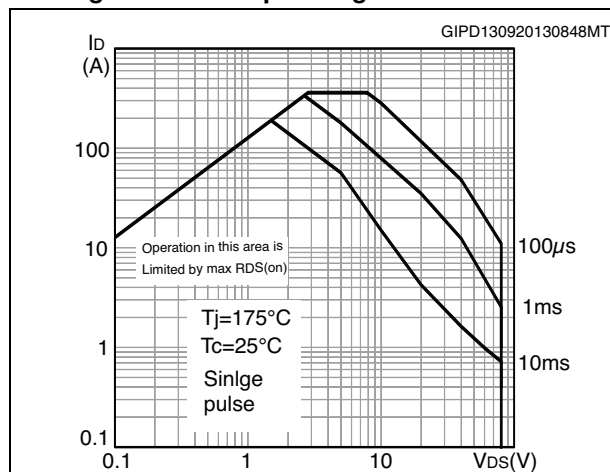


Figure 7. Thermal impedance for TO-220

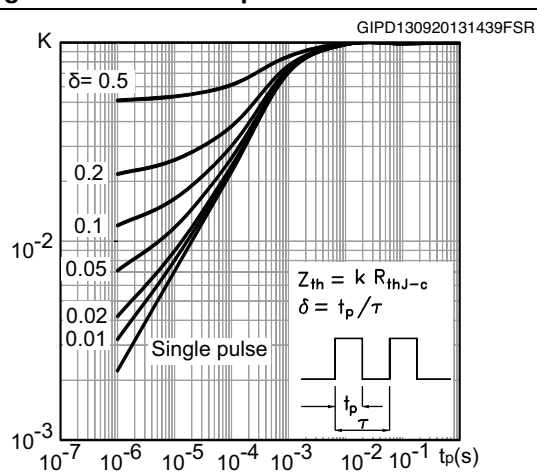


Figure 8. Output characteristics

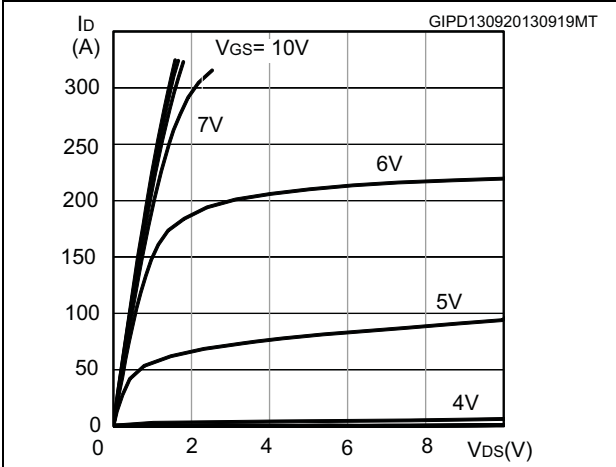


Figure 9. Transfer characteristics

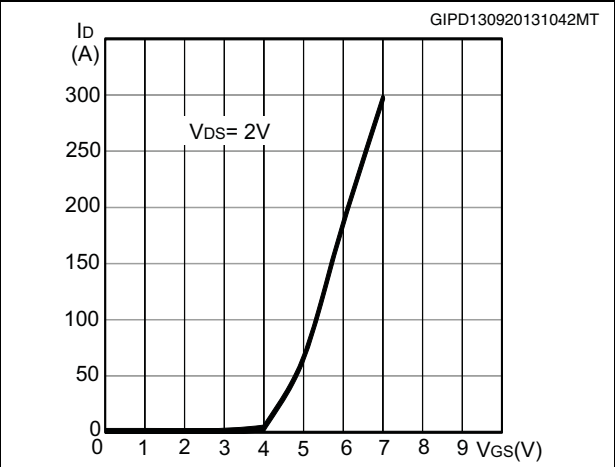


Figure 10. Gate charge vs gate-source voltage

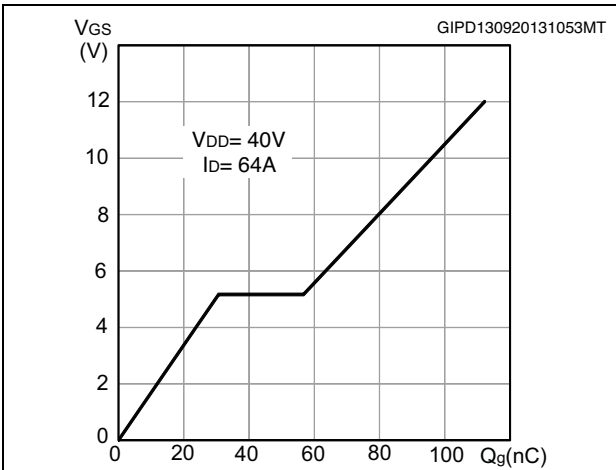


Figure 11. Static drain-source on-resistance for TO-220FP

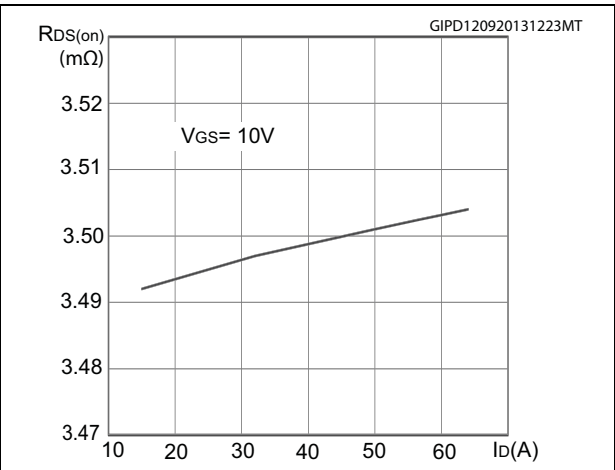


Figure 12. Static drain-source on-resistance for H²PAK-2

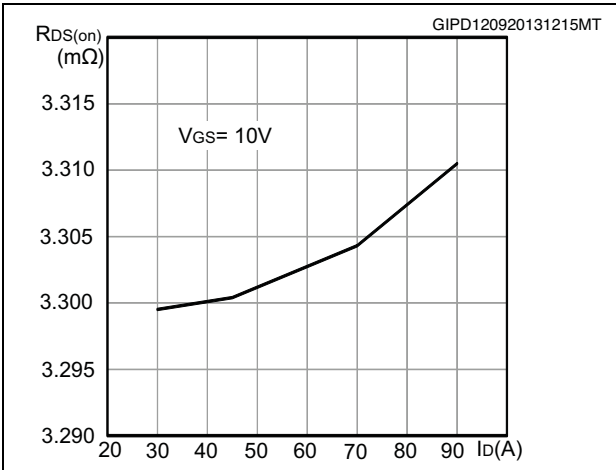


Figure 13. Static drain-source on-resistance for TO-220

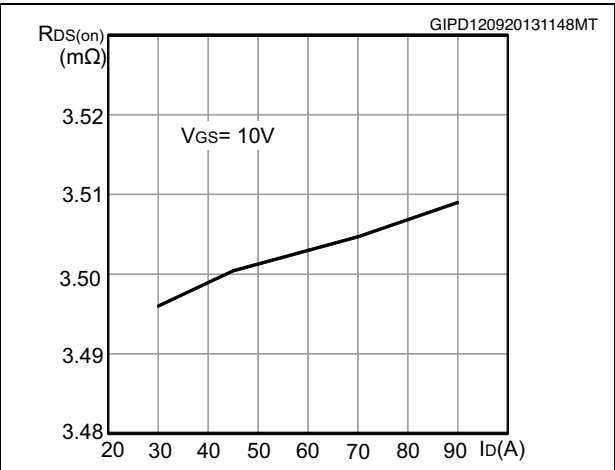


Figure 14. Capacitance variations

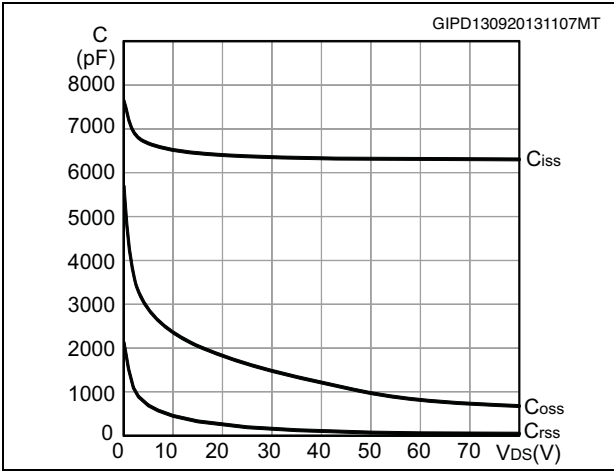


Figure 15. Normalized gate threshold voltage vs temperature

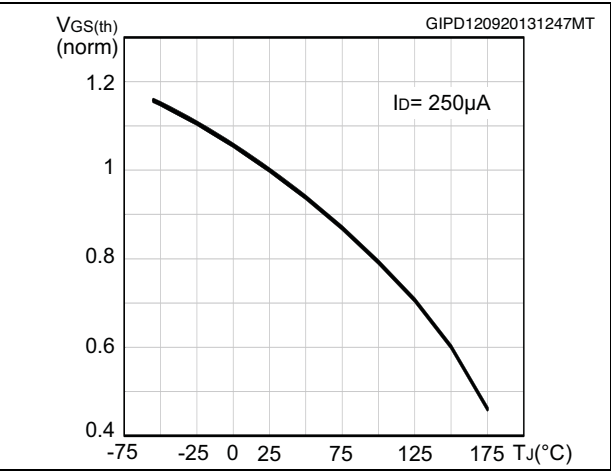


Figure 16. Normalized on-resistance vs temperature

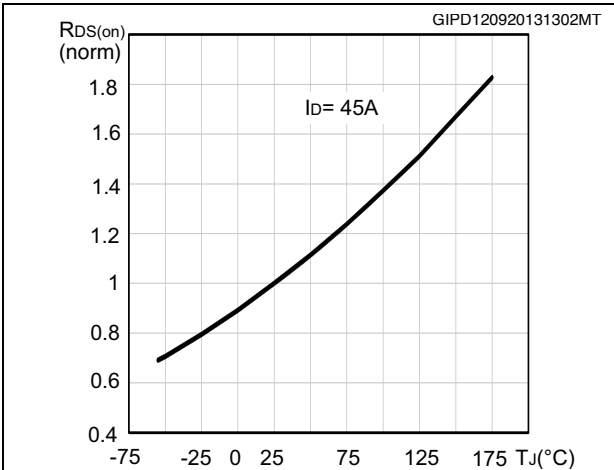


Figure 17. Normalized V(BR)DSS vs temperature

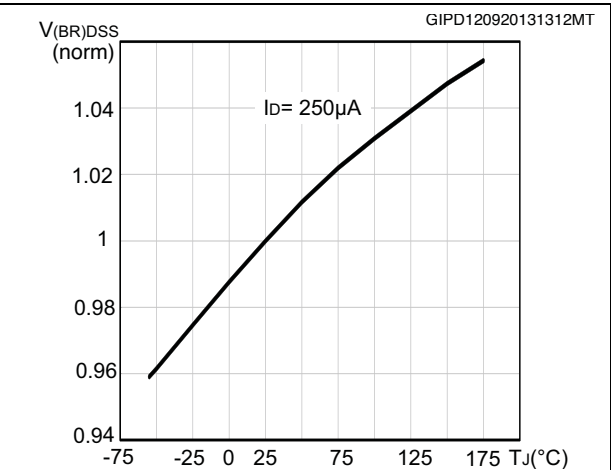


Figure 18. Source-drain diode forward characteristics for H²PAK-2 and TO-220

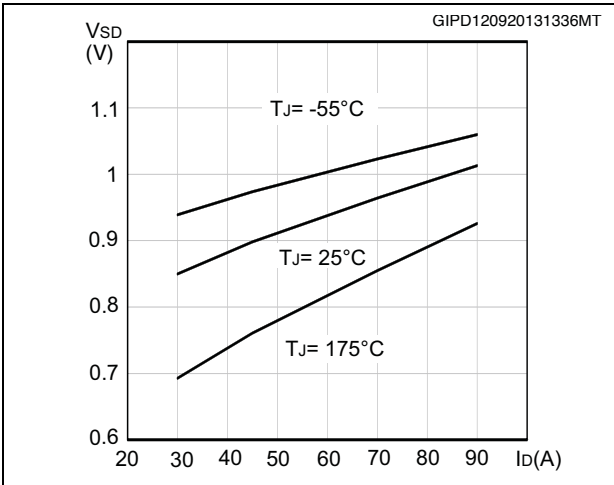
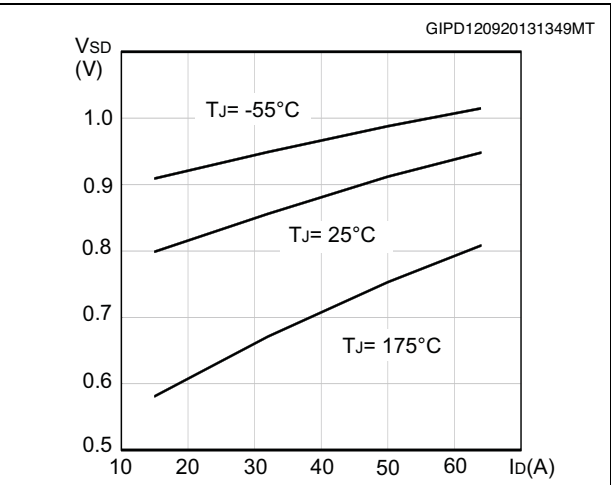


Figure 19. Source-drain diode forward characteristics for TO-220FP



3 Test circuits

Figure 20. Switching times test circuit for resistive load



Figure 21. Gate charge test circuit

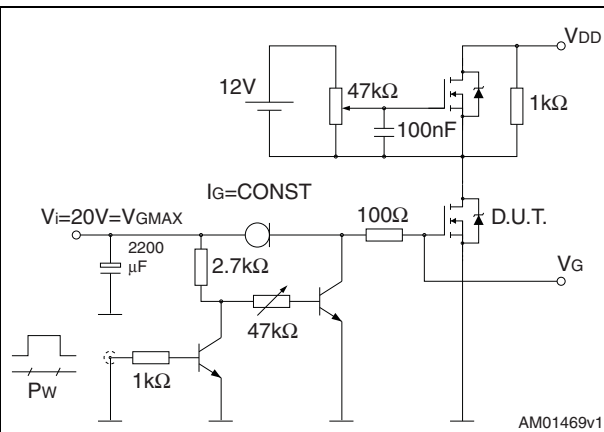


Figure 22. Test circuit for inductive load switching and diode recovery times

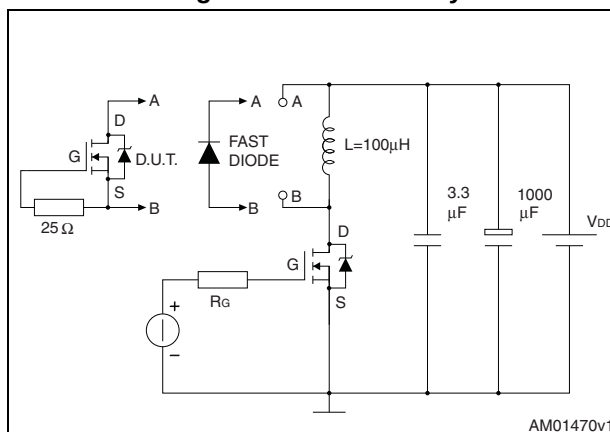


Figure 23. Unclamped inductive load test circuit

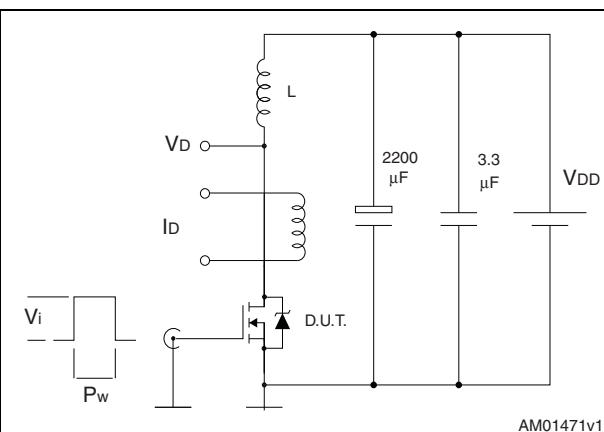


Figure 24. Unclamped inductive waveform

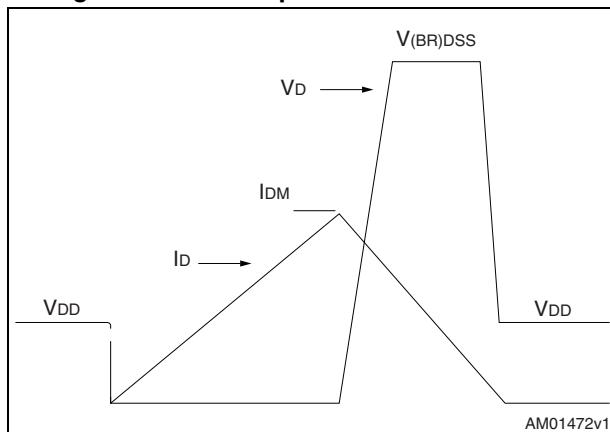


Figure 25. Switching time waveform



4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Table 8. TO-220FP mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.4		4.60
B	2.5		2.7
D	2.5		2.75
E	0.45		0.7
F	0.75		1
F1	1.15		1.70
F2	1.15		1.70
G	4.95		5.2
G1	2.40		2.7
H	10		14
L2		16	10.4
L3	28.6		
L4	9.8		30.6
L5	2.9		10.6
L6	15.9		3.6
L7	9		16.4
Dia	3		3.2

Figure 26. TO-220FP drawing

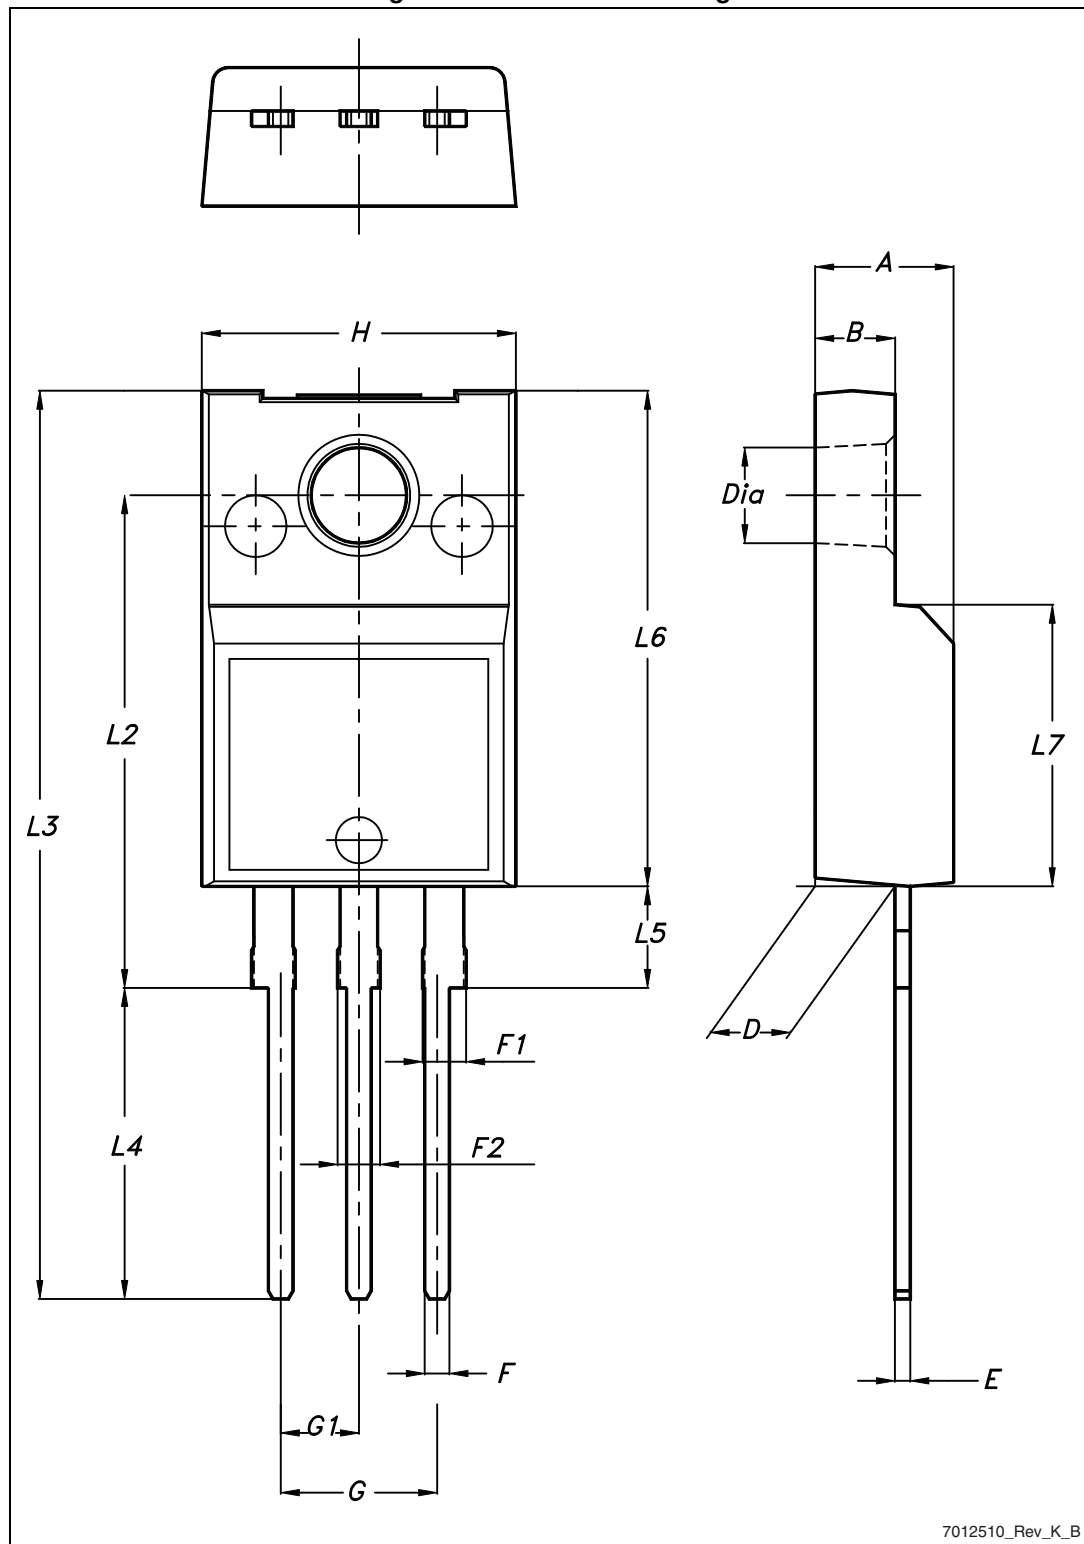


Table 9. H²PAK-2 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.30	-	4.80
A1	0.03		0.20
C	1.17		1.37
e	4.98		5.18
E	0.50		0.90
F	0.78		0.85
H	10.00		10.40
H1	7.40		7.80
L	15.30		15.80
L1	1.27		1.40
L2	4.93		5.23
L3	6.85		7.25
L4	1.5		1.7
M	2.6		2.9
R	0.20		0.60
V	0°		8°

Figure 27. H²PAK-2 drawing

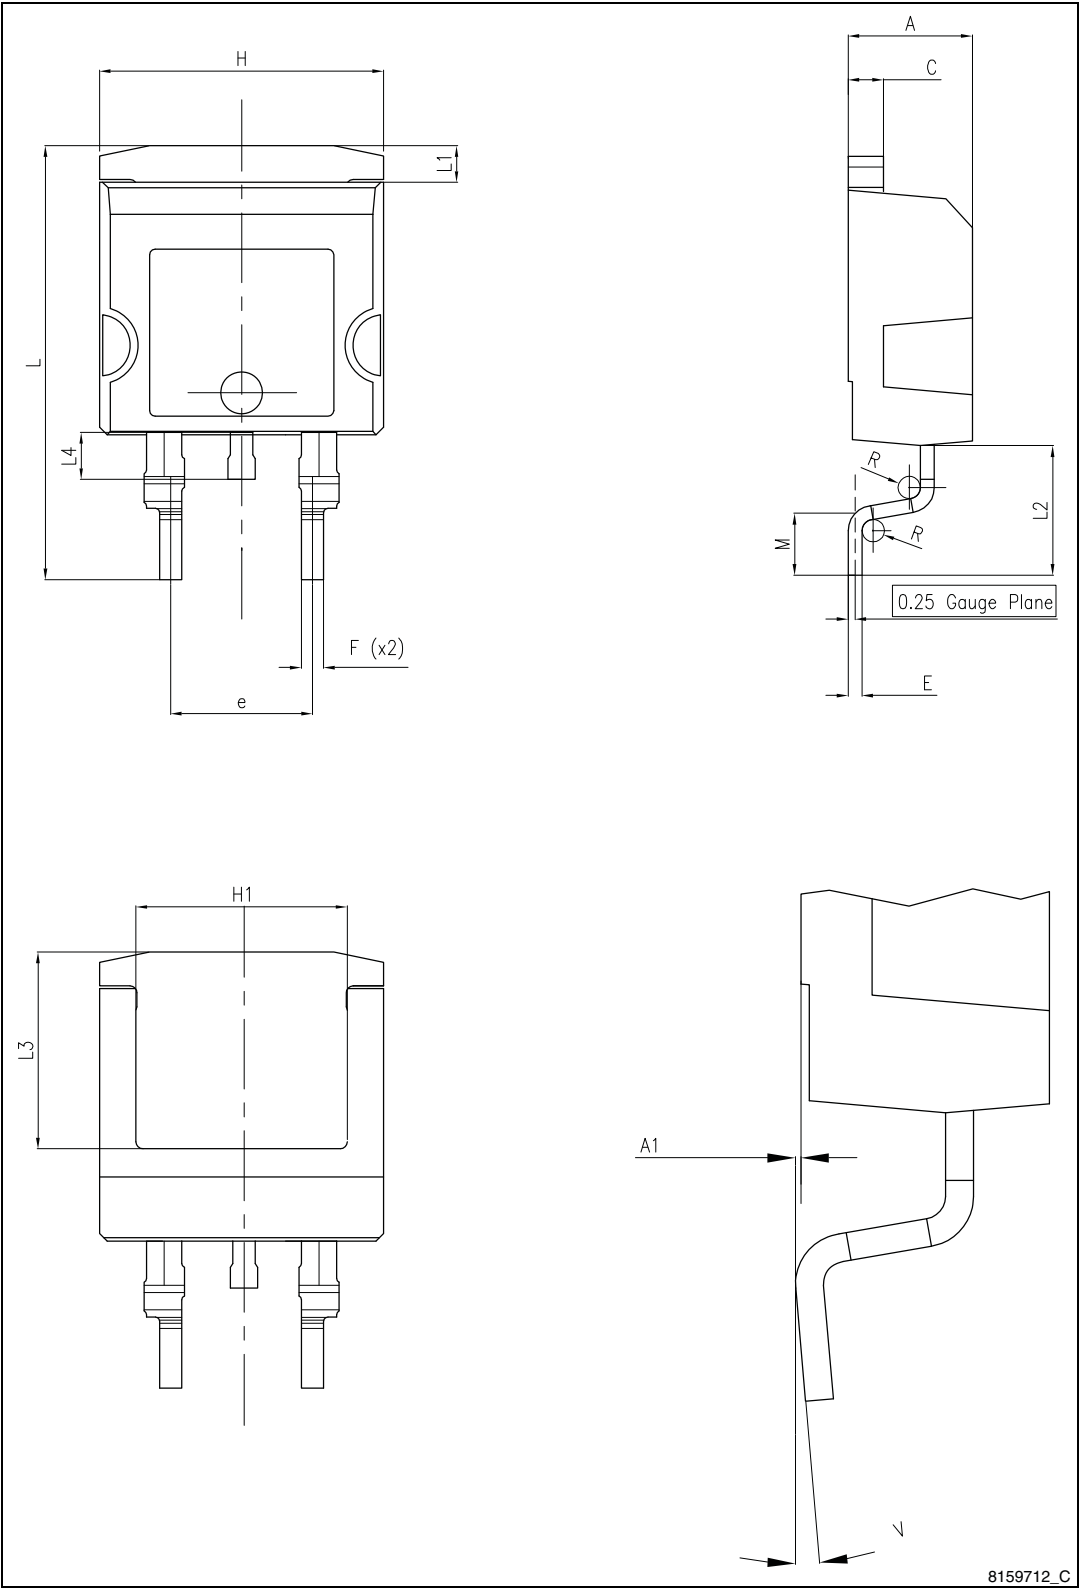


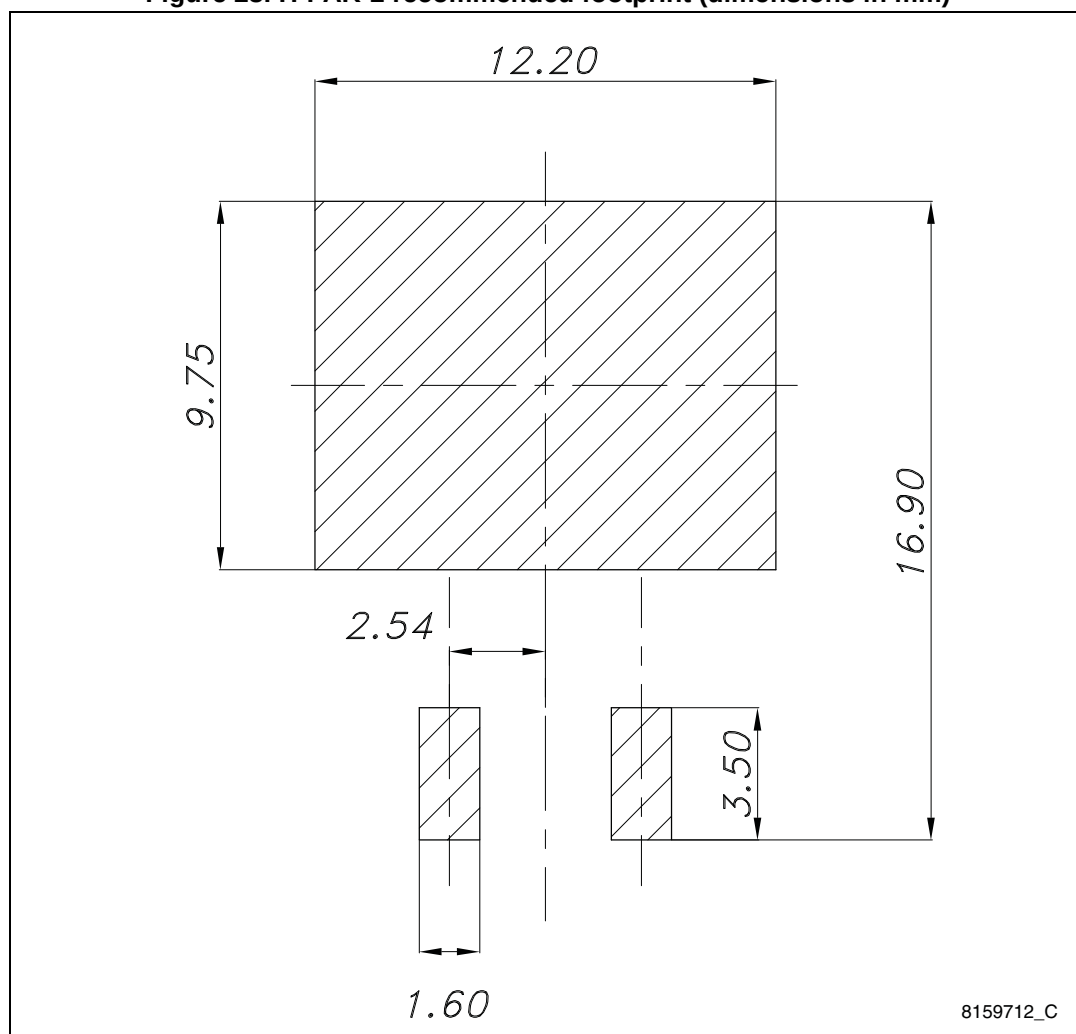
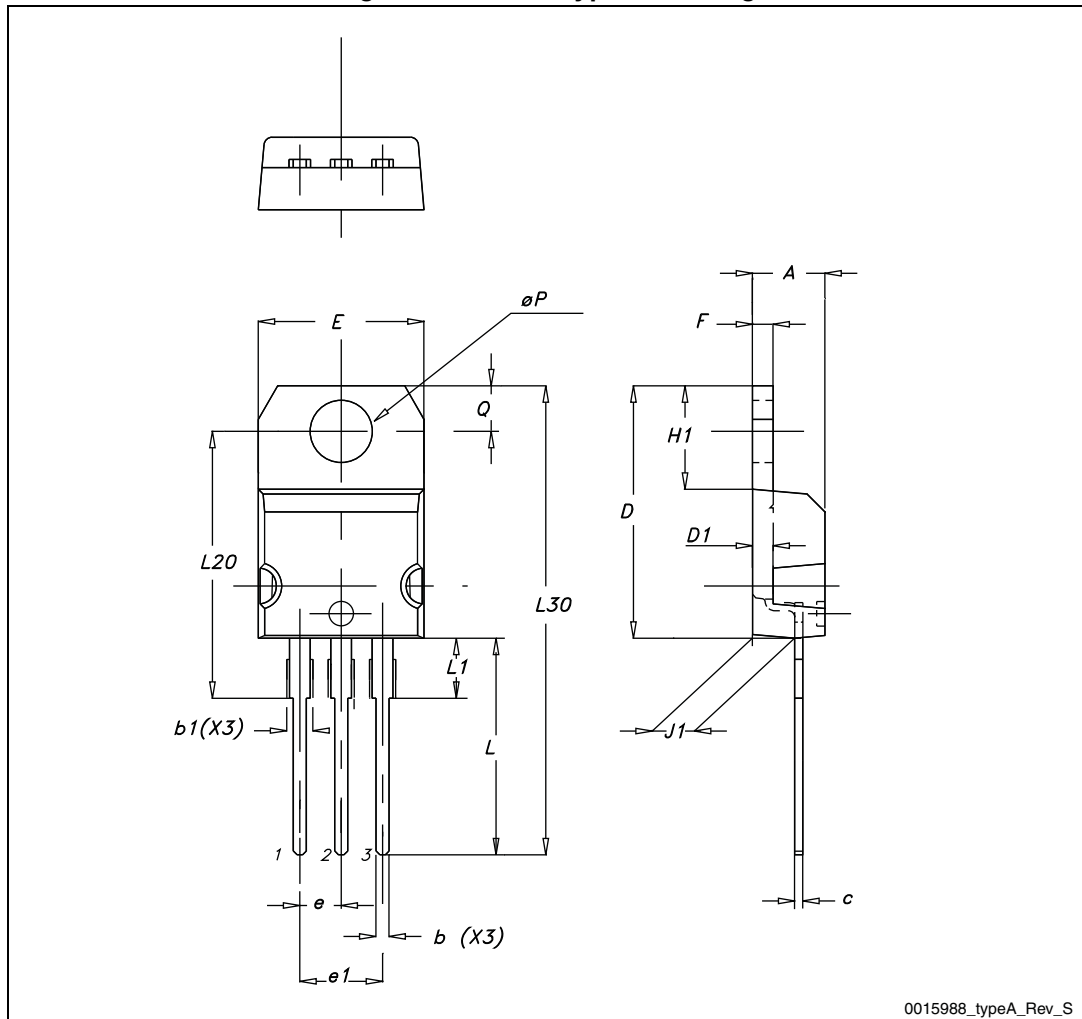
Figure 28. H²PAK-2 recommended footprint (dimensions in mm)

Table 10. TO-220 type A mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.70
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13		14
L1	3.50		3.93
L20		16.40	
L30		28.90	
ØP	3.75		3.85
Q	2.65		2.95

Figure 29. TO-220 type A drawing



5 Packaging mechanical data

Table 11. H²PAK-2 tape and reel mechanical data

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	10.5	10.7	A		330
B0	15.7	15.9	B	1.5	
D	1.5	1.6	C	12.8	13.2
D1	1.59	1.61	D	20.2	
E	1.65	1.85	G	24.4	26.4
F	11.4	11.6	N	100	
K0	4.8	5.0	T		30.4
P0	3.9	4.1			
P1	11.9	12.1	Base qty		1000
P2	1.9	2.1	Bulk qty		1000
R	50				
T	0.25	0.35			
W	23.7	24.3			

Figure 30. Tape dimension

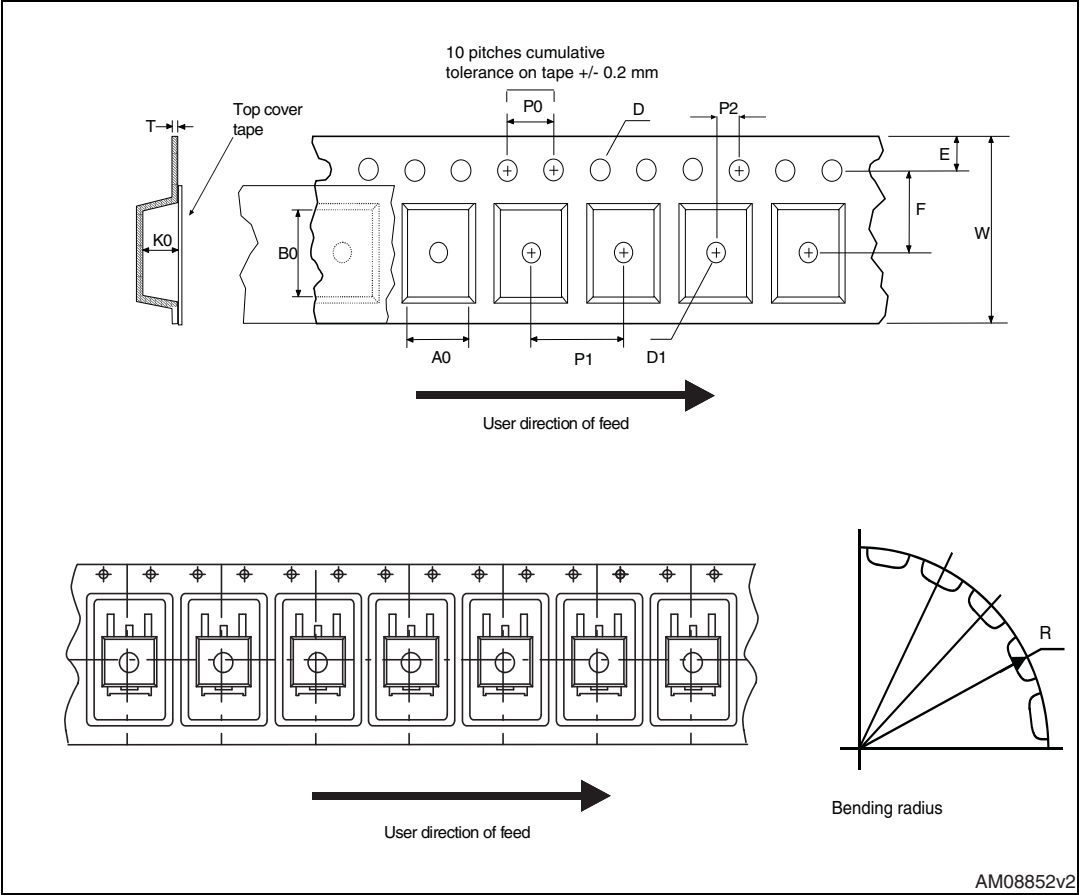
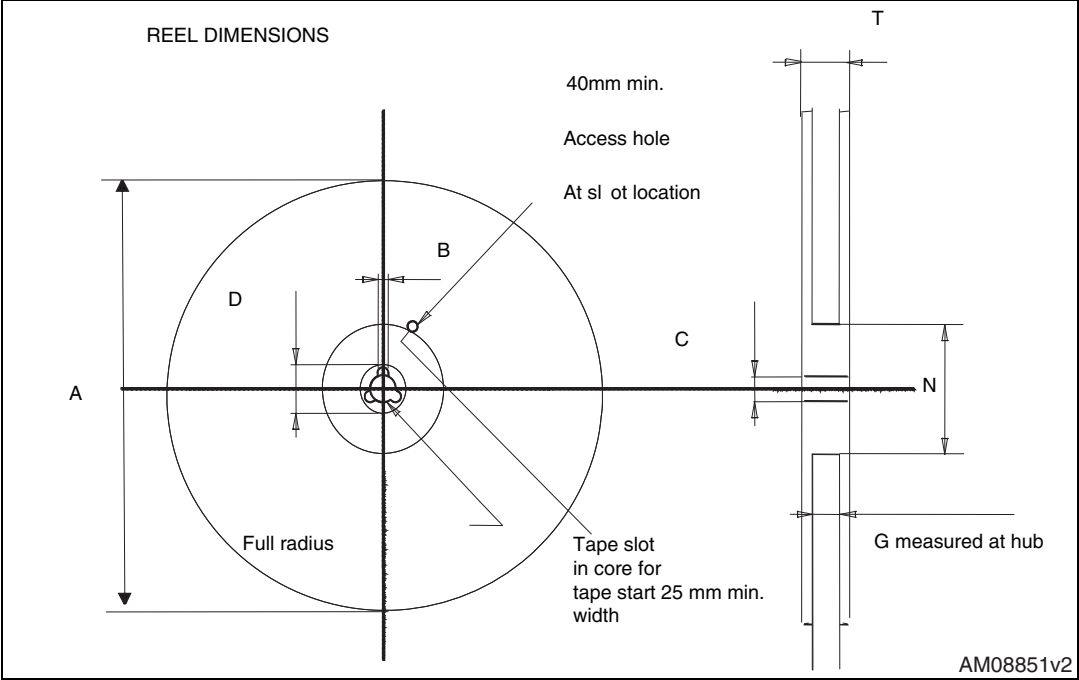


Figure 31. Reel dimension



6 Revision history

Table 12. Document revision history

Date	Revision	Changes
18-Sep-2013	1	First release.

Confidentiality obligations:

This document contains sensitive information. Its distribution is subject to the signature of a Non-Disclosure Agreement (NDA). It is classified "ST RESTRICTED". At all times you should comply with the following security rules (Refer to NDA for detailed obligations):

Do not copy or reproduce all or part of this document.

Keep this document locked away.

Further copies can be provided on a "need to know basis", please contact your local ST sales office.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com