



## LOW DROP POWER SCHOTTKY RECTIFIER

**Table 1: Main Product Characteristics**

$I_{F(AV)}$	1 A
$V_{RRM}$	40 V
$T_j(\text{max})$	150°C
$V_F(\text{max})$	0.40 V


### FEATURES AND BENEFITS

- Very small conduction losses
- Negligible switching losses
- Extremely fast switching
- Low forward voltage drop for higher efficiency and extended battery life
- Low thermal resistance
- Avalanche capability specified

### DESCRIPTION

Single Schottky rectifier suited for switch mode power supplies and high frequency DC to DC converters.

Packaged in STmite, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications. Due to the small size of the package this device fits battery powered equipment (cellular, notebook, PDA's, printers) as well chargers and PCMCIA cards.

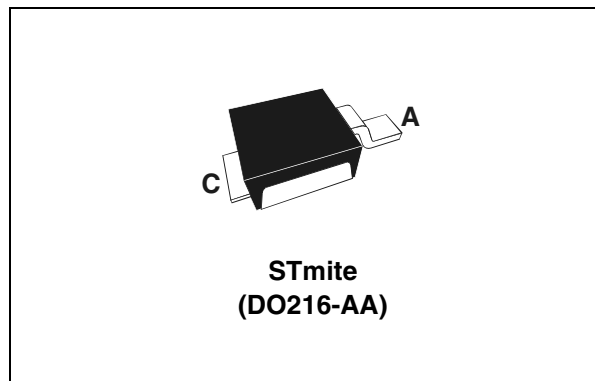

**Table 2: Order Code**

Part Number	Marking
STPS1L40M	1L4

**Table 3: Absolute Ratings** (limiting values)

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage	40	V
$I_{F(RMS)}$	RMS forward current	2	A
$I_{F(AV)}$	Average forward current	$T_c = 140^\circ\text{C} \quad \delta = 0.5$ 1	A
$I_{FSM}$	Surge non repetitive forward current	10 ms sinusoidal 50	A
$P_{ARM}$	Repetitive peak avalanche power	$t_p = 1\mu\text{s} \quad T_j = 25^\circ\text{C}$ 1200	W
$T_{stg}$	Storage temperature range	-65 to + 150	°C
$T_j$	Maximum operating junction temperature *	150	°C
dV/dt	Critical rate of rise of reverse voltage (rated $V_R$ , $T_j = 25^\circ\text{C}$ )	10000	V/ $\mu\text{s}$

\*:  $\frac{dP_{tot}}{dT_j} > \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

# STPS1L40M

**Table 4: Thermal Resistance**

Symbol	Parameter	Value	Unit
$R_{th(j-c)}^*$	Junction to case	20	°C/W
$R_{th(j-l)}^*$	Junction to ambient	250	°C/W

\* Mounted with minimum recommended pad size, PC board FR4.


**Table 5: Static Electrical Characteristics**

Symbol	Parameter	Tests conditions	Min.	Typ	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$		0.021	0.063
		$T_j = 85^\circ\text{C}$			1.3	
		$T_j = 25^\circ\text{C}$	$V_R = 20\text{V}$		0.007	0.021
		$T_j = 85^\circ\text{C}$			0.49	1.5
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$		0.40	0.46
		$T_j = 85^\circ\text{C}$			0.35	0.40
		$T_j = 25^\circ\text{C}$	$I_F = 3\text{A}$		0.52	0.60
		$T_j = 85^\circ\text{C}$			0.50	0.58

Pulse test: \*  $t_p = 380 \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:  $P = 0.34 \times I_{F(AV)} + 0.07 I_F^2 (\text{RMS})$

**Figure 1: Conduction losses versus average current**

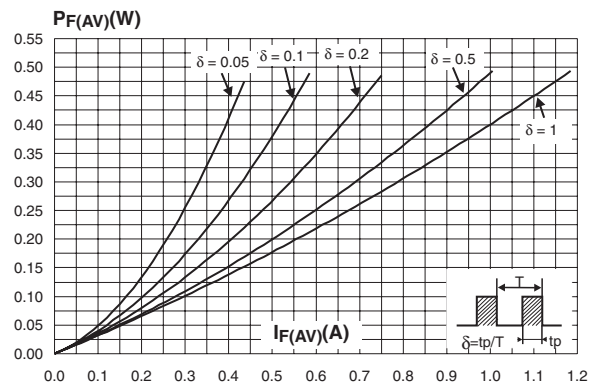

**Figure 2: Average forward current versus ambient temperature ( $\delta = 0.5$ )**

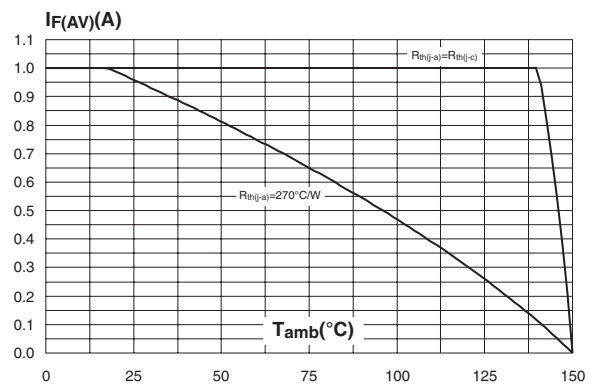


Figure 12: STmite Package Mechanical Data

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.85	1.00	1.15	0.033	0.039	0.045
A1	-0.05		0.05	-0.002		0.002
b	0.40		0.65	0.016		0.025
b2	0.70		1.00	0.027		0.039
c	0.10		0.25	0.004		0.010
D	1.75	1.90	2.05	0.069	0.007	0.081
E	1.75	1.90	2.05	0.069	0.007	0.081
H	3.60	3.75	3.90	0.142	0.148	0.154
L	0.50	0.63	0.80	0.020	0.025	0.031
L2	1.20	1.35	1.50	0.047	0.053	0.059
L3		0.50 ref			0.019 ref	
R	0.07			0.003		
R1	0.07			0.003		

Figure 13: Foot Print Dimensions (in millimeters)

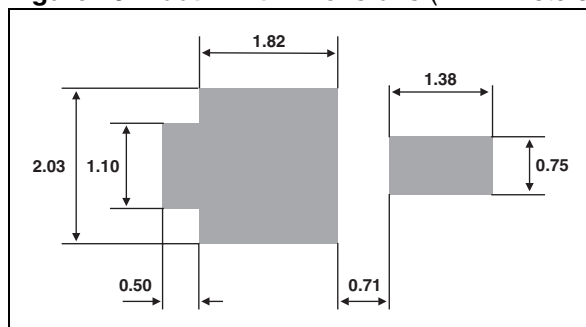


Table 6: Ordering Information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS1L40M	1L4	STmite	15.5 mg	12000	Tape & reel

Table 7: Revision History

Date	Revision	Description of Changes
Jul-2003	2A	Last update.
13-Sep-2004	3	STmite package dimensions reference A1 change: from blank (min) to -0.05mm and from 0.10 (max) to 0.05mm.