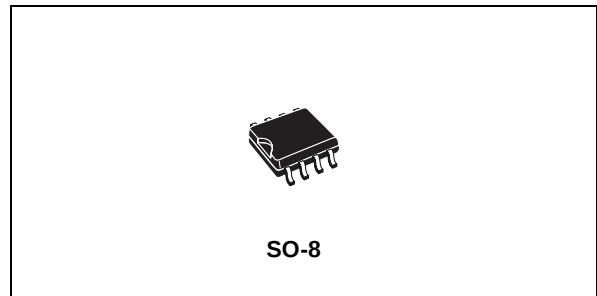




## STSR3

### SYNCHRONOUS RECTIFIERS SMART DRIVER FOR FLYBACK

- SUPPLY VOLTAGE RANGE: 4V TO 5.5V
- TYPICAL PEAK OUTPUT CURRENT:  
(SOURCE 2A, SINK 3.5A)
- OPERATING FREQUENCY: 30 TO 750 KHz
- SMART TURN-OFF ANTICIPATION TIMING
- AUTOMATIC TURN OFF FOR DUTY CYCLE  
LESS THAN 14%
- POSSIBILITY TO OPERATE IN  
DISCONTINUOUS MODE



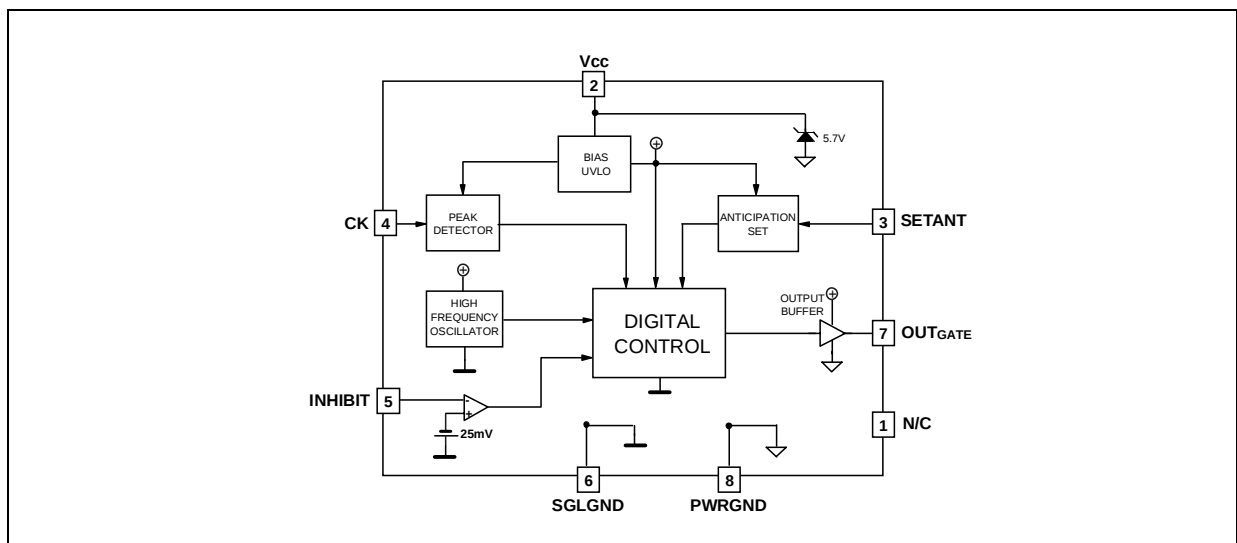
#### DESCRIPTION

STSR3 Smart Driver IC provides a high current outputs to properly drive secondary Power Mosfets used as Synchronous Rectifier in low output voltage, high efficiency Flyback Converters. From a synchronizing clock input, withdrawn on the secondary side of the isolation transformer, the IC generates a driving signal with set dead times with respect to the primary side PWM signal.

The IC operation prevents secondary side shoot-through conditions at turn-on of the primary

switch providing anticipation in turn-off the output. This smart function is implemented by a fast cycle-after-cycle logic control mechanism, based on a high frequency oscillator synchronized by the clock signal. This anticipation is externally set through external component. A special Inhibit function allows to shut-off the drive output. This feature makes discontinuous conduction mode possible and avoids reverse conduction of the synchronous rectifier.

#### SCHEMATIC DIAGRAM



## STSR3

### ABSOLUTE MAXIMUM RATINGS

| Symbol               | Parameter                                                              |                         | Value                   | Unit |
|----------------------|------------------------------------------------------------------------|-------------------------|-------------------------|------|
| V <sub>CC</sub>      | DC Input Voltage                                                       |                         | -0.3 to 6               | V    |
| V <sub>OUTGATE</sub> | Max Gate Drive Output Voltage                                          |                         | -0.3 to V <sub>CC</sub> | V    |
| V <sub>INHIBIT</sub> | Max INHIBIT Voltage (*)                                                |                         | -0.6 to V <sub>CC</sub> | V    |
| V <sub>CK</sub>      | Clock Input Voltage Range (*)                                          |                         | -0.3 to V <sub>CC</sub> | V    |
| P <sub>TOT</sub>     | Continuous Power Dissipation at T <sub>A</sub> =105°C without heatsink |                         | 270                     | mW   |
| ESD                  | Human Body Model                                                       | Pins 1,2, 4, 5, 6, 7, 8 | ±1                      | KV   |
|                      |                                                                        | Pin 3                   | ±0.9                    | KV   |
| T <sub>stg</sub>     | Storage Temperature Range                                              |                         | -55 to +150             | °C   |
| T <sub>op</sub>      | Operating Junction Temperature Range                                   |                         | -40 to +125             | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

(\*) A higher positive voltage level can be applied to the pin with a resistor which limits the current flowing into the pin to 10mA maximum

### THERMAL DATA

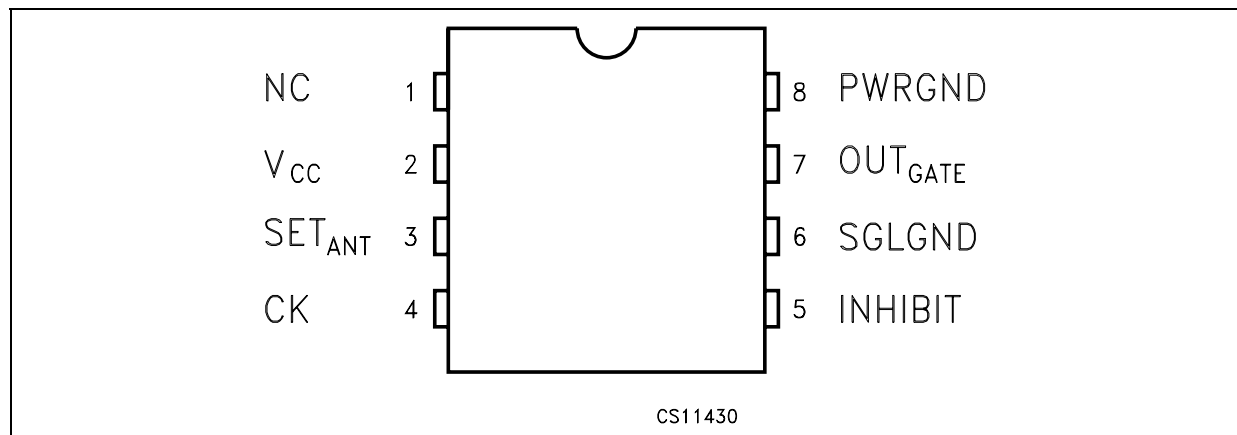
| Symbol               | Parameter                               | SO-8 | Unit |
|----------------------|-----------------------------------------|------|------|
| R <sub>thj-amb</sub> | Thermal Resistance Junction-case        | 40   | °C/W |
| R <sub>thj-amb</sub> | Thermal Resistance Junction-ambient (*) | 160  | °C/W |

(\*) This value is referred to one layer pcb board with minimum copper connections for the leads. a minimum value of 120 °C/W can be obtained improving thermal conductivity of the board

### ORDERING CODES

| TYPE  | SO-8    | SO-8 (T&R) |
|-------|---------|------------|
| STSR3 | STSR3CD | STSR3CD-TR |

### CONNECTION DIAGRAM (top view)



## PIN DESCRIPTION

| Pin N° | Symbol              | Name and Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | NC                  | No internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2      | V <sub>CC</sub>     | The supply voltage range from 4.0V to 5.5V allows applications with logic gate threshold mosfets. UVLO feature guarantees proper start-up while it avoids undesirable driving during eventual dropping of the supply voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 3      | SET <sub>ANT</sub>  | The voltage on this pin sets the anticipation (t <sub>ANT</sub> ) in turning off the OUT <sub>GATE</sub> . It is possible to choose among three different anticipation times by discrete partitioning of the supply voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4      | CK                  | This input provides synchronization for IC's operations, being the transitions between the two output conditions based on a positive threshold, equal for the two slopes. A smart internal control logic mechanism using a 15MHz internal oscillator generates proper anticipation timing at the turn-off of each output. This feature allows safe turn-off of Synchronous Rectifier avoiding any eventual shoot-through situation on secondary side at both transitions. Smart clock revelation mechanism makes these operations independent by false triggering pulses generated in light load conditions. Absolute maximum voltage rating of the pin can be exceeded limiting the current flowing into the pin to 10mA max. |
| 5      | INHIBIT             | This input enables OUT <sub>GATE</sub> to work when its voltage is lower than the negative threshold voltage (V <sub>INHIBIT</sub> < V <sub>H</sub> ). If V <sub>INHIBIT</sub> > V <sub>H</sub> the OUT <sub>GATE</sub> will be high for a minimum conduction time (t <sub>ON(GATE)</sub> ). In typical flyback converter application, it is possible to turn off the synchronous MOSFET when the current through it tends to reverse, allowing discontinuous conduction mode and providing protection to the converter from eventual sinking current from the load. Absolute maximum voltage rating of the pin can be exceeded limiting the current flowing into the pin to 10mA max.                                         |
| 6      | SGLGND              | Reference for all the control logic signals. This pin is completely separated from the PWRGND to prevent eventual disturbances to affect the control logic.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7      | OUT <sub>GATE</sub> | Gate Drive signal for synchronous MOSFET. Anticipation [t <sub>ANT</sub> ] in turning off OUT <sub>GATE</sub> is provided during the transition in which the clock input goes to high level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 8      | PWRGND              | Reference for power signals, this pin carries the full peak currents for the two outputs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |


**ELECTRICAL CHARACTERISTICS** ( $V_{CC}=5V$ ,  $CK=250kHz$ , duty-cycle=50%,  $V_{INHIBIT}=-200mV$ ,  $T_J=-40$  to  $125^{\circ}C$ , unless otherwise specified.)

| Symbol                                  | Parameter                                                 | Test Conditions                                                       | Min. | Typ. | Max. | Unit |
|-----------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------------|------|------|------|------|
| SUPPLY INPUT AND UNDER VOLTAGE LOCK OUT |                                                           |                                                                       |      |      |      |      |
| V <sub>CCON</sub>                       | Start Threshold                                           |                                                                       |      | 3.8  | 4    | V    |
| V <sub>CCOFF</sub>                      | Turn OFF Threshold After Start                            |                                                                       | 3.5  | 3.6  |      | V    |
| V <sub>Z</sub>                          | Zener Voltage                                             | CK=0V I <sub>Z</sub> = 2mA                                            | 5.5  | 5.8  | 6    | V    |
| I <sub>CC</sub>                         | Unloaded Supply Current                                   | OUT <sub>GATE</sub> = no load                                         |      | 15   | 20   | mA   |
|                                         |                                                           | CK=0V OUT <sub>GATE</sub> = no load                                   |      | 3    | 5    |      |
| GATE DRIVER OUTPUTS                     |                                                           |                                                                       |      |      |      |      |
| V <sub>OL</sub>                         | Output Low Voltage                                        | I <sub>OUTGATE</sub> = -200mA                                         |      | 0.10 | 0.16 | V    |
| V <sub>OH</sub>                         | Output High Voltage                                       | I <sub>OUTGATE</sub> =200mA                                           | 4.70 | 4.85 |      | V    |
| I <sub>OUT</sub>                        | Output Source Peak Current                                |                                                                       |      | 2    |      | A    |
|                                         | Output Sink Peak Current                                  |                                                                       |      | 3.5  |      |      |
| R <sub>OUT</sub>                        | Output Series Source Resistance                           | I <sub>OUTGATE</sub> = -200mA                                         |      | 0.75 | 1.5  | Ω    |
|                                         | Output Series Sink Resistance                             | I <sub>OUTGATE</sub> =200mA                                           |      | 0.5  | 0.8  |      |
| t <sub>R</sub>                          | OUT <sub>GATE</sub> Rise Time                             | C <sub>LOAD</sub> =5nF (Note 1)                                       |      | 40   |      | ns   |
| t <sub>F</sub>                          | OUT <sub>GATE</sub> Fall Time                             | C <sub>LOAD</sub> =5nF (Note 1)                                       |      | 30   |      | ns   |
| t <sub>p</sub>                          | Clock Propagation Delay to Turn ON of OUT <sub>GATE</sub> | No Load                                                               |      | 50   |      | ns   |
| TURN-OFF ANTICIPATION TIME              |                                                           |                                                                       |      |      |      |      |
| t <sub>ANT</sub>                        | OUT <sub>GATE</sub> Turn-off Anticipation Time            | V <sub>ANT</sub> = 0 to 1/3V <sub>CC</sub> ; no load                  |      | 75   |      | ns   |
|                                         |                                                           | V <sub>ANT</sub> = 1/3V <sub>CC</sub> to 2/3V <sub>CC</sub> ; no load |      | 150  |      |      |
|                                         |                                                           | V <sub>ANT</sub> = 2/3V <sub>CC</sub> to V <sub>CC</sub> ; no load    |      | 225  |      |      |
| I <sub>SETANT</sub>                     | Leakage Current (Note 2)                                  |                                                                       | -0.1 |      | 0.1  | μA   |
| INHIBIT OUT <sub>GATE</sub> ENABLE      |                                                           |                                                                       |      |      |      |      |
| V <sub>H</sub>                          | Threshold Voltage                                         | T <sub>J</sub> = 25°C                                                 | -30  | -25  |      | mV   |
| I <sub>H</sub>                          | Leakage Current (Note 2)                                  | V <sub>INHIBIT</sub> = 200mV                                          |      | -400 |      | nA   |
|                                         |                                                           | V <sub>INHIBIT</sub> = -200mV                                         |      |      | 1    | μA   |
| t <sub>ON(GATE)</sub>                   | Minimum OUT <sub>GATE</sub> On time                       | V <sub>INHIBIT</sub> = +200mV                                         |      | 250  |      | ns   |
| SYNCHRONIZATION INPUT                   |                                                           |                                                                       |      |      |      |      |
| V <sub>CK</sub>                         | Reference Voltage                                         | T <sub>J</sub> = 25°C                                                 |      | 2.6  | 2.8  | V    |
| D <sub>OFF</sub>                        | Duty Cycle Shut Down                                      | T <sub>J</sub> = 25°C                                                 | 13   | 14   |      | %    |
|                                         | Duty Cycle Turn ON after Shut Down                        | T <sub>J</sub> = 25°C                                                 |      | 18   | 20   |      |


Note1:  $t_R$  is measured between 10% and 90% of the final voltage;  $t_F$  is measured between 90% and 10% on the initial voltage

Note2: Parameter guaranteed by design
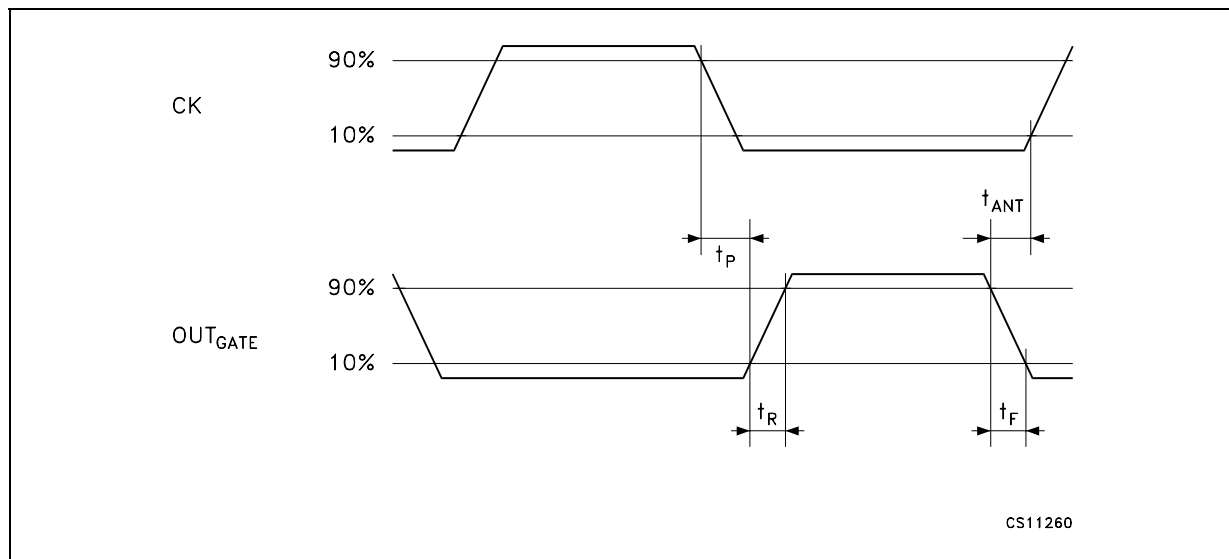
## TIMING DIAGRAM



## APPLICATION INFORMATION: STSR3 IN FLYBACK CONVERTER SECONDARY SIDE

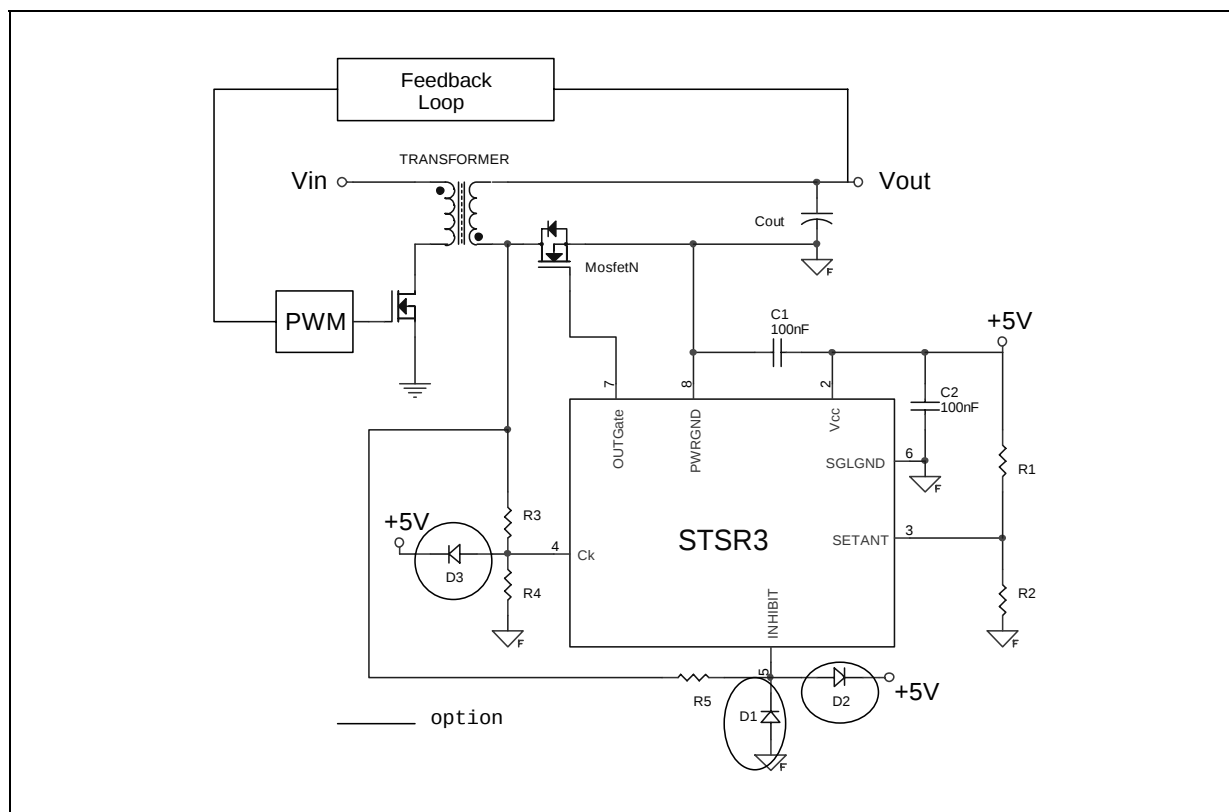

## NOTES

- 1) Ceramic Capacitors C1 and C2 must be placed very close to the IC;
- 2) R1 and R2 set the anticipation time by partitioning the V<sub>CC</sub> voltage;
- 3) R3 and R4 is a resistor divider meant to provide the correct CK voltage range;
- 4) R5 limits the current flowing through diode D2 when Freewheeling drain voltage is high;
- 5) D1 could be necessary to protect INHIBIT pin from negative voltages.
- 6) D2 could be necessary to protect INHIBIT pin from voltages higher than V<sub>CC</sub>
- 7) D3 could be necessary to protect CK pin from voltages higher than V<sub>CC</sub>.
- 8) SGLGND layout trace must not include OUT<sub>GATE</sub> current paths.
- 9) A capacitor in parallel with R4 could be necessary to eliminate turn off voltage spike.

**EXAMPLE OF COMPONENTS SELECTION FOR A FLYBACK CONVERTER**

Flyback Specification:

$$V_{IN}=36-72V$$

$$V_{OUT}=3.3V$$

$$n=N_p/N_s=4.5$$

$R_3$  and  $R_4$  are calculated assuring a minimum voltage of 2.8V at Ck pin. At 36V input, the voltage on the secondary winding is  $36/4.5=8V$ . Choosing  $R_3=1.5k\Omega$ ,  $R_4$  results to be:

$$R_4 \geq \frac{V_{CK} \times R_3}{V_{IN} - I_{CK(2.8)} \times R_3 - V_{CK}} = 1k\Omega \times \frac{2.8V \times 1.5k\Omega}{8V - 220\mu A \times 1.5k\Omega - 2.8V} = 862\Omega$$

$R_4=1k\Omega$  is chosen. At 72V input the current at Ck pin is calculated as:

$$I_{CK} = \frac{V_{IN(max)} - V_{CC} - 0.3}{R_3} = \frac{16 - 5 - 0.3}{1.5k\Omega} = 7.13mA$$

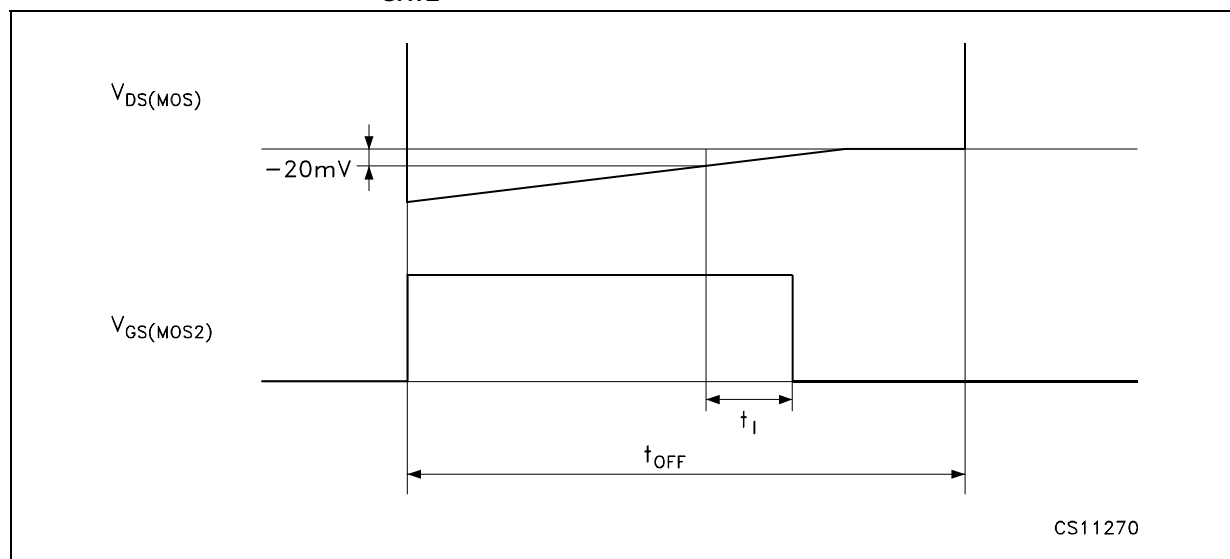
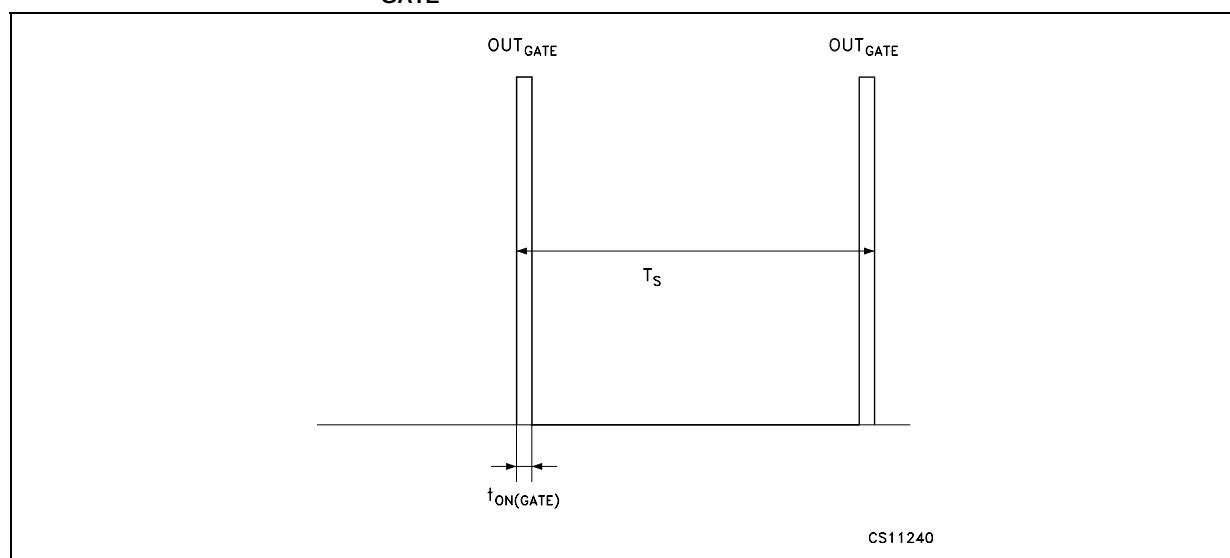
This value is below the maximum allowable current flowing into the Ck pin (10mA). If the 10mA value is exceeded an external diode connected to  $V_{CC}$  must be added (D3).

$R_1$  and  $R_2$  values set the anticipation time for  $OUT_{GATE}$ . For  $R_1=\infty$  and  $R_2=0$ ,  $t_{ANT}=75ns$ ; for  $R_1=R_2=10k\Omega$ ,  $t_{ANT}=150ns$ ; for  $R_1=0$  and  $R_2=\infty$ ,  $t_{ANT}=225ns$ .

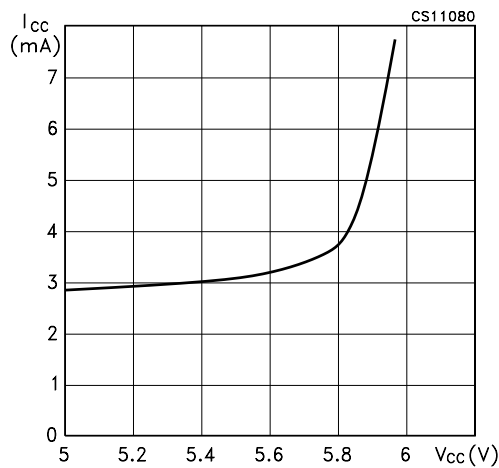
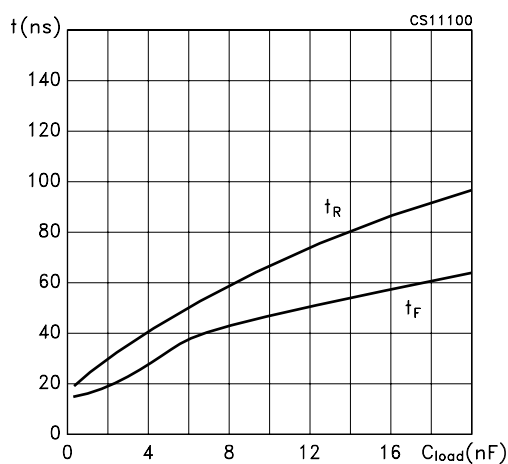
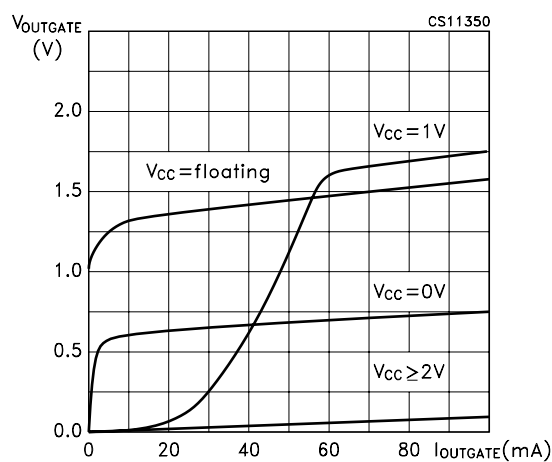
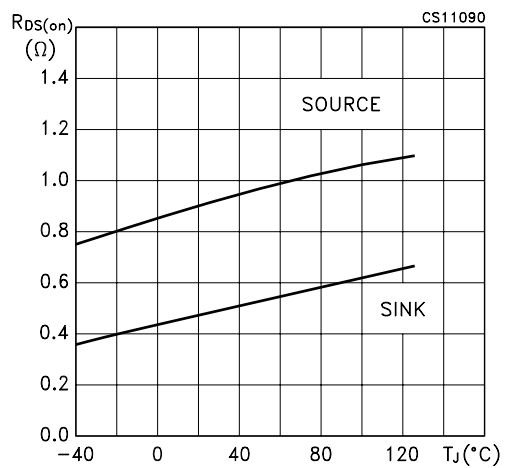
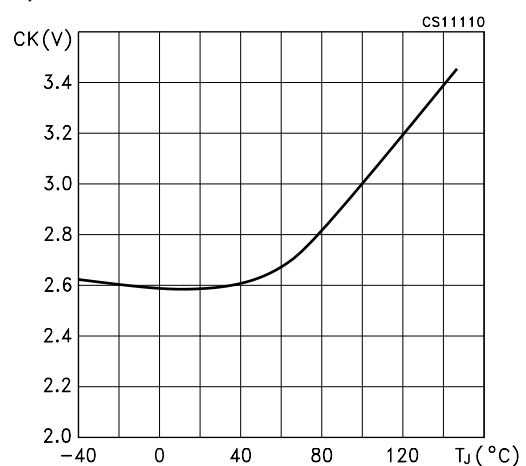
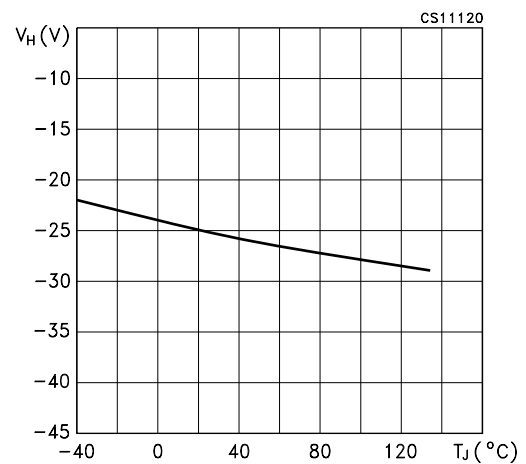
The RC group composed by  $R_5$  and the parasitic capacitance of Inhibit pin (typically 5pF) delays the signal on Inhibit comparator. This delay must be lower than 200ns. This condition imposes a maximum value for  $R_5$  of about 20k $\Omega$ .

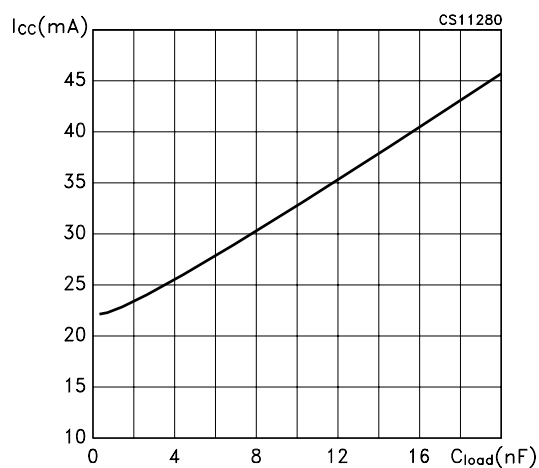
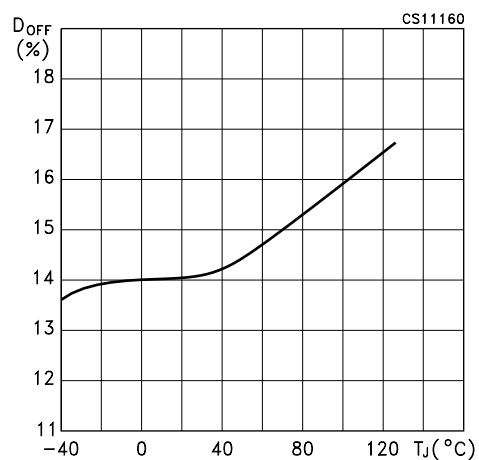
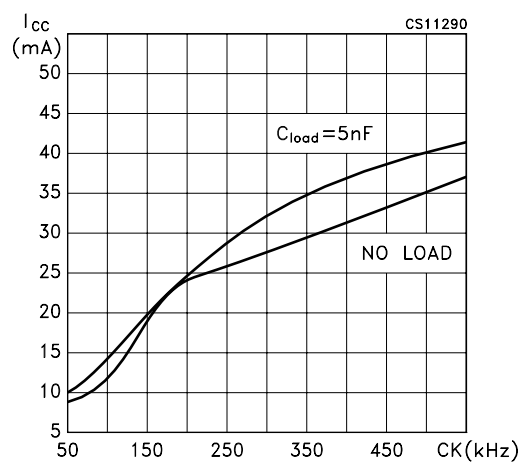
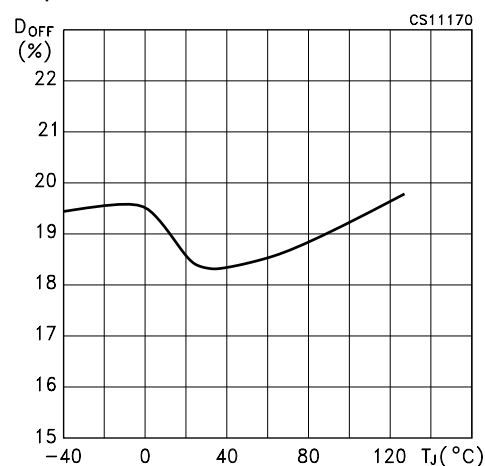
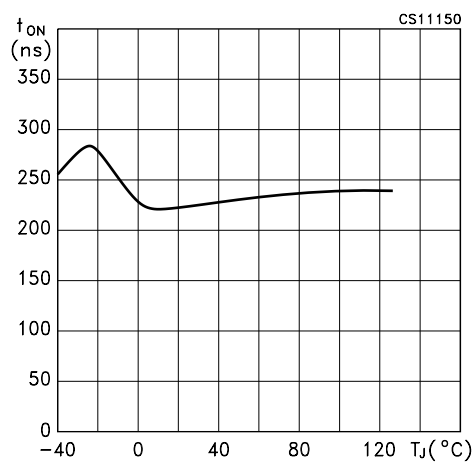
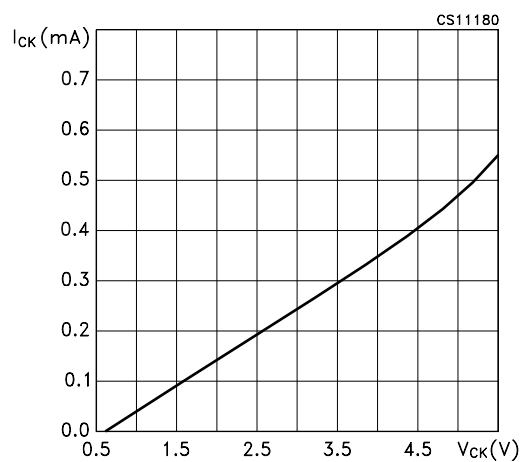
In general a suggested value for  $R_5$  is 10k $\Omega$ . At 72V input, the secondary voltage is 16V, so the maximum current flowing into Inhibit pin is  $16V/10k\Omega=1.6mA$  which is below the maximum allowable current for the pin (10mA). If the 10mA value is exceeded an external diode (D2) connected to  $V_{CC}$  must be added.

The maximum negative voltage of -0.6V must be guaranteed for the Inhibit pin. If this negative voltage is exceeded the current must be limited to 50mA. If necessary, a diode (D1) connected to SGLGND can be added to satisfy this specification.

INHIBIT OPERATION OF  $OUT_{GATE}$  IN DISCONTINUOUS CONDUCTION MODEINHIBIT OPERATION OF  $OUT_{GATE}$ 

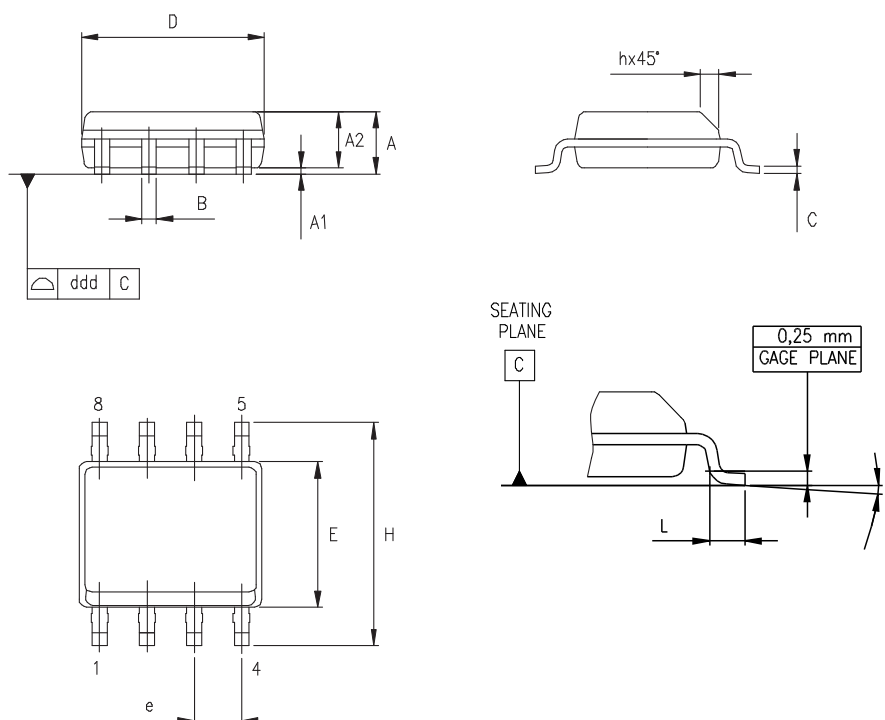
**TYPICAL PERFORMANCE CHARACTERISTICS** (unless otherwise specified  $T_J = 25^\circ\text{C}$ )

**Figure 1 : Zener Characteristics**

**Figure 2 : Rise and Fall Time vs Load Capacitor**

**Figure 3 :  $V_{OUTGATE}$  vs Characteristics**

**Figure 4 : Sink-Source ON Resistance vs Temperature**

**Figure 5 : Clock Threshold Voltage vs Temperature**

**Figure 6 : INHIBIT Threshold Voltage vs Temperature**


**Figure 7 : Supply Current vs Load Capacitor****Figure 10 : Duty Cycle Shut Down vs Temperature****Figure 8 : Supply Current vs Clock Frequency****Figure 11 : Duty Cycle Turn ON After Shut Down vs Temperature****Figure 9 : GATE ON Time vs Temperature****Figure 12 : Clock Leakage Current vs Clock Voltage**

## SO-8 MECHANICAL DATA

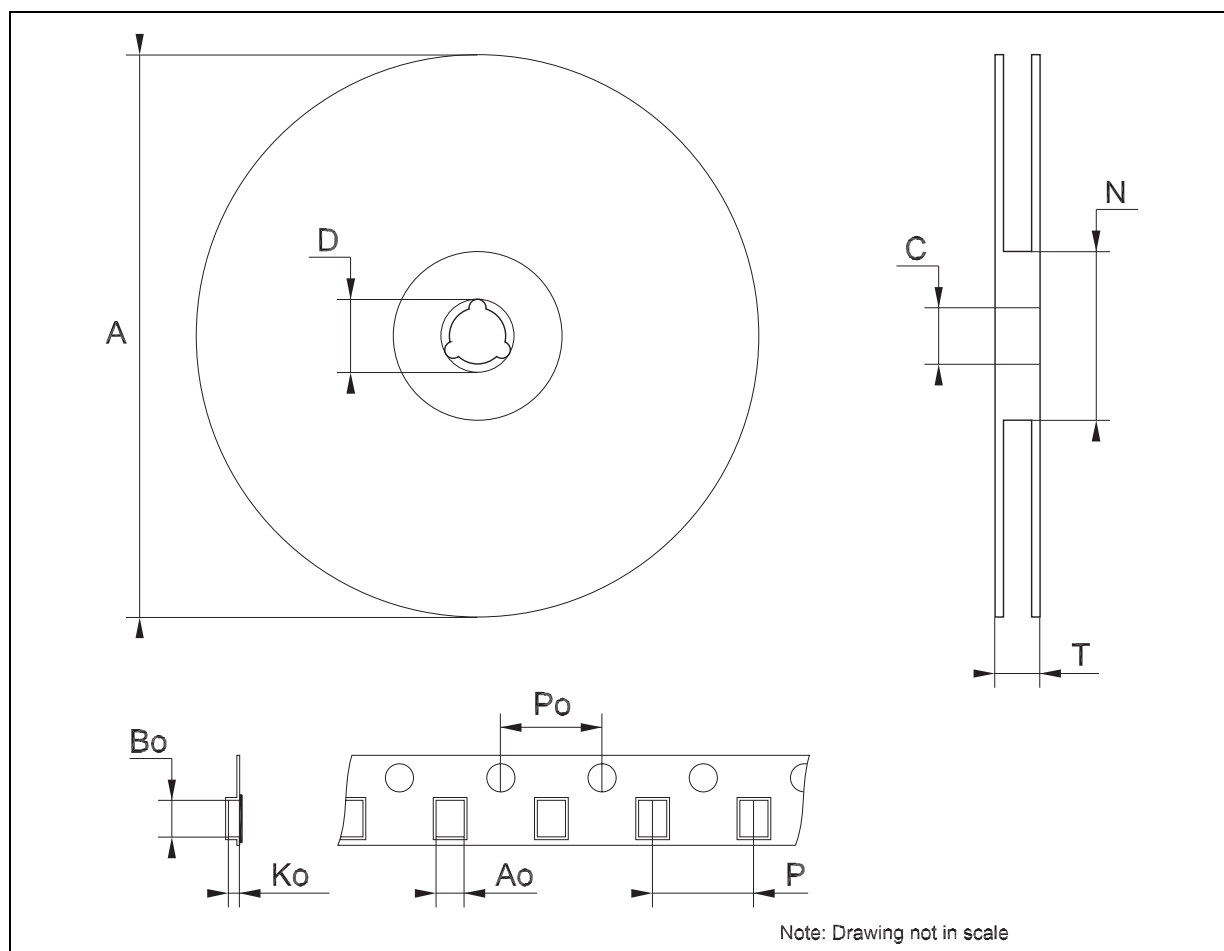
| DIM. | mm.       |      |      | inch  |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | MIN.      | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 1.35      |      | 1.75 | 0.053 |       | 0.069 |
| A1   | 0.10      |      | 0.25 | 0.04  |       | 0.010 |
| A2   | 1.10      |      | 1.65 | 0.043 |       | 0.065 |
| B    | 0.33      |      | 0.51 | 0.013 |       | 0.020 |
| C    | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| D    | 4.80      |      | 5.00 | 0.189 |       | 0.197 |
| E    | 3.80      |      | 4.00 | 0.150 |       | 0.157 |
| e    |           | 1.27 |      |       | 0.050 |       |
| H    | 5.80      |      | 6.20 | 0.228 |       | 0.244 |
| h    | 0.25      |      | 0.50 | 0.010 |       | 0.020 |
| L    | 0.40      |      | 1.27 | 0.016 |       | 0.050 |
| k    | 8° (max.) |      |      |       |       |       |
| ddd  |           |      | 0.1  |       |       | 0.04  |



0016023/C

## Tape &amp; Reel SO-8 MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 8.1  |     | 8.5  | 0.319 |      | 0.335  |
| Bo   | 5.5  |     | 5.9  | 0.216 |      | 0.232  |
| Ko   | 2.1  |     | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |     | 8.1  | 0.311 |      | 0.319  |



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>