

TURBO 2 ULTRAFAST HIGH VOLTAGE RECTIFIER

Table 1: Main Product Characteristics

$I_{F(AV)}$	Up to 2 x 10 A
V_{RRM}	600 V
T_j	175°C
V_F (typ)	1.05 V
t_{rr} (max)	35 ns

FEATURES AND BENEFITS

- Ultrafast switching
- Low reverse recovery current
- Low thermal resistance
- Reduces switching & conduction losses

DESCRIPTION

The STTH16L06, which is using ST Turbo 2 600V technology, is specially suited for use in switching power supplies, and industrial applications, as rectification and discontinuous mode PFC boost diode.

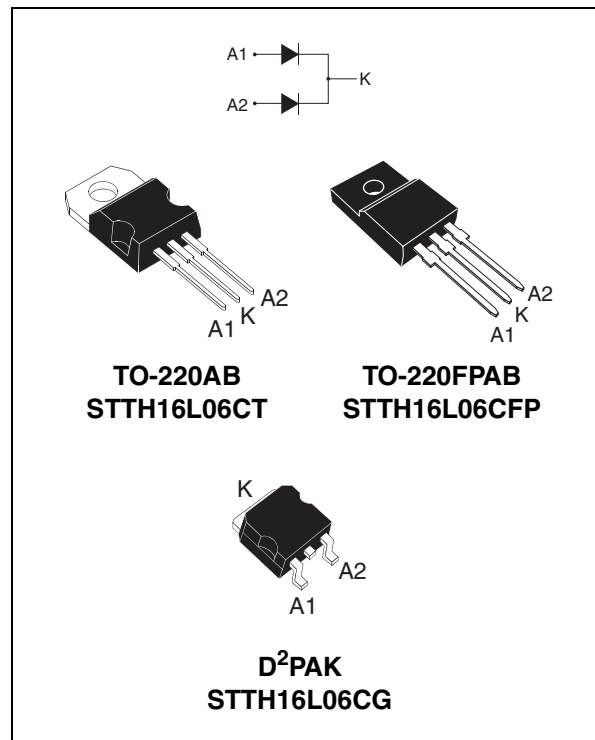


Table 2: Order Codes

Part Number	Marking
STTH16L06CT	STTH16L06CT
STTH16L06CFP	STTH16L06CFP

Part Number	Marking
STTH16L06CG	STTH16L06CG
STTH16L06GG-TR	STTH16L06CG

Table 3: Absolute Ratings (limiting values, per diode)

Symbol	Parameter			Value	Unit	
V_{RRM}	Repetitive peak reverse voltage			600	V	
$I_{F(RMS)}$	RMS forward current			30	A	
$I_{F(AV)}$	Average forward current $\delta = 0.5$	TO-220AB / D ² PAK	$T_c = 140^\circ\text{C}$	Per diode	8	A
			$T_c = 135^\circ\text{C}$	Per device	16	
			$T_c = 130^\circ\text{C}$	Per diode	10	
			$T_c = 120^\circ\text{C}$	Per device	20	
		TO-220FPAB	$T_c = 110^\circ\text{C}$	Per diode	8	
			$T_c = 80^\circ\text{C}$	Per device	16	
I_{FSM}	Surge non repetitive forward current		$t_p = 10\text{ms}$ sinusoidal	90	A	
T_{stg}	Storage temperature range			-65 to + 175	°C	
T_j	Maximum operating junction temperature			175	°C	

STTH16L06C

Table 4: Thermal Resistance

Symbol	Parameter			Value (max).	Unit
$R_{th(j-c)}$	Junction to case	TO-220AB / D ² PAK	Per diode	2.5	°C/W
		TO-220FPAB	Per diode	5	
		TO-220AB / D ² PAK	Total	1.6	
		TO-220FPAB	Total	3.8	
$R_{th(c)}$	Coupling	TO-220AB / D ² PAK		0.7	°C/W
		TO-220FPAB		2.5	

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j(\text{diode } 1) = P(\text{diode } 1) \times R_{th(j-c)}(\text{Per diode}) + P(\text{diode } 2) \times R_{th(c)}$$

Table 5: Static Electrical Characteristics

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
I_R^*	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			8	μA
		$T_j = 150^\circ\text{C}$			25	240	
V_F^{**}	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$			1.8	V
		$T_j = 150^\circ\text{C}$			1.05	1.35	
		$T_j = 25^\circ\text{C}$	$I_F = 16\text{A}$			2.08	
		$T_j = 150^\circ\text{C}$			1.28	1.64	

Pulse test: * $t_p = 5 \text{ ms}$, $\delta < 2\%$

** $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation: $P = 1.06 \times I_{F(AV)} + 0.036 I_F^2(\text{RMS})$

Table 6: Dynamic Characteristics (per diode)

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
t_{rr}	Reverse recovery time	$T_j = 25^\circ\text{C}$	$I_F = 0.5\text{A}$ $I_{rr} = 0.25\text{A}$ $I_R = 1\text{A}$			35	ns
			$I_F = 1\text{A}$ $dl_F/dt = 50 \text{ A}/\mu\text{s}$ $V_R = 30\text{V}$		40	55	
I_{RM}	Reverse recovery current	$T_j = 125^\circ\text{C}$	$I_F = 8\text{A}$ $V_R = 400\text{V}$ $dl_F/dt = 100 \text{ A}/\mu\text{s}$		4.5	6.5	A
t_{fr}	Forward recovery time	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$ $dl_F/dt = 100 \text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$			200	ns
V_{FP}	Forward recovery voltage	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$ $dl_F/dt = 100 \text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$		3.5		V

Figure 1: Conduction losses versus average forward current (per diode)

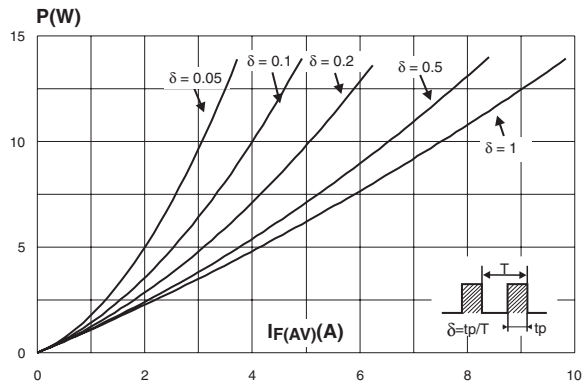


Figure 2: Forward voltage drop versus forward current (per diode)

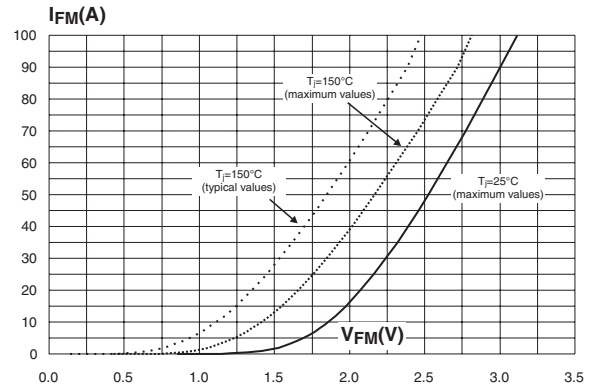


Figure 3: Relative variation of thermal impedance junction to case versus pulse duration (TO-220AB & D²PAK)

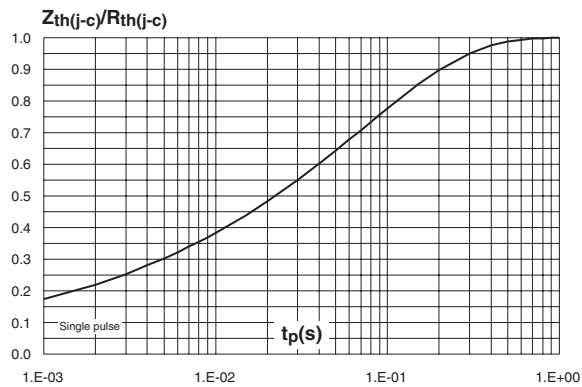


Figure 4: Relative variation of thermal impedance junction to case versus pulse duration (TO-220FPAB)

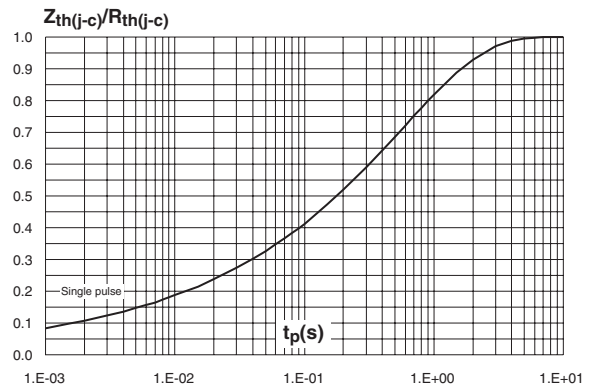


Figure 5: Peak reverse recovery current versus dI_F/dt (typical values, per diode)

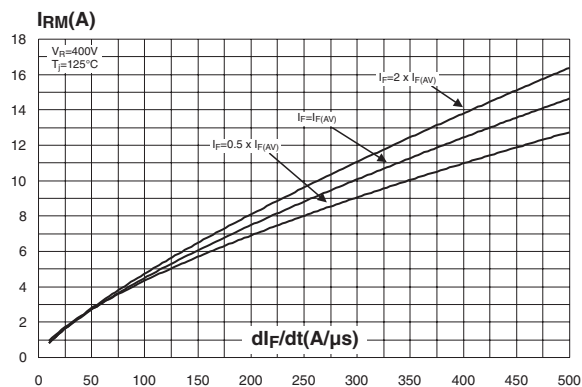


Figure 6: Reverse recovery time versus dI_F/dt (typical values, per diode)

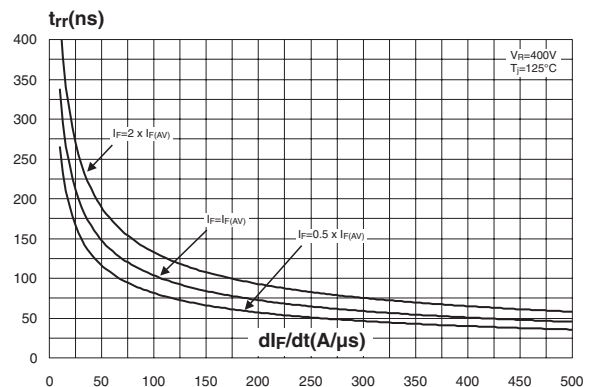


Figure 7: Reverse recovery charges versus di_F/dt (typical values, per diode)

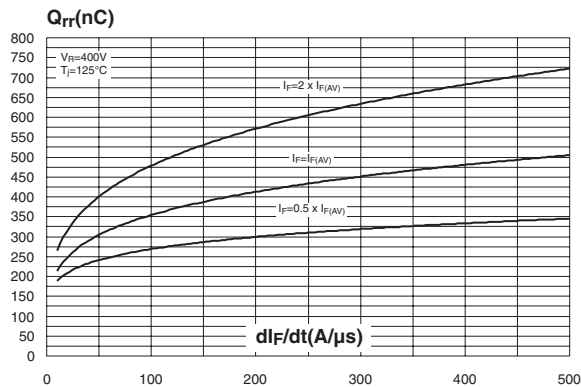


Figure 8: Reverse recovery softness factor versus di_F/dt (typical values, per diode)

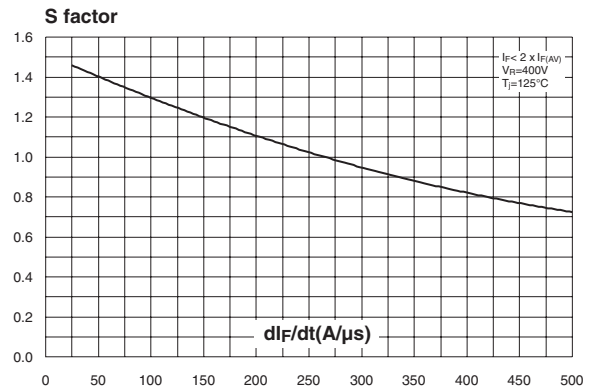


Figure 9: Relative variations of dynamic parameters versus junction temperature

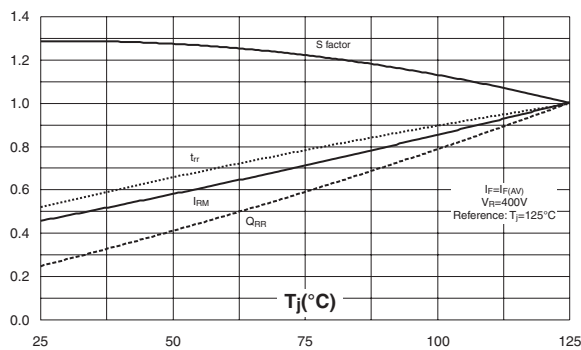


Figure 10: Transient peak forward voltage versus di_F/dt (typical values, per diode)

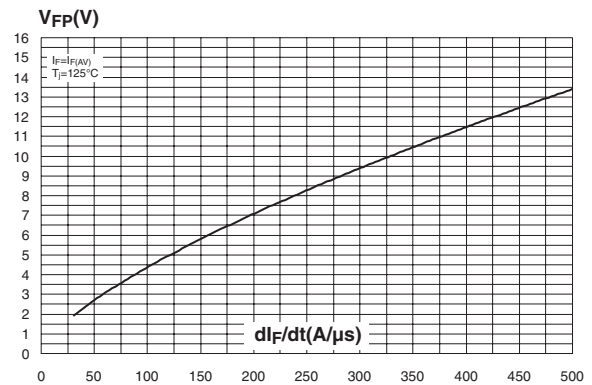


Figure 11: Forward recovery time versus di_F/dt (typical values, per diode)

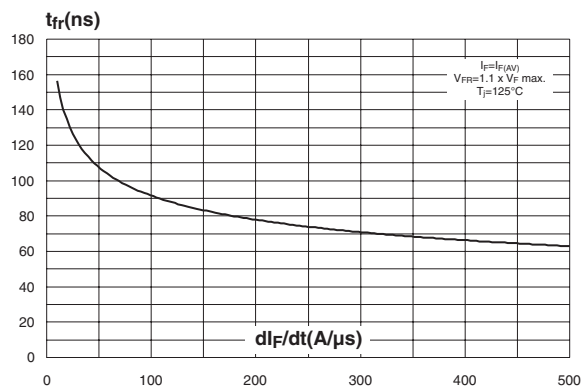


Figure 12: Junction capacitance versus reverse voltage applied (typical values, per diode)

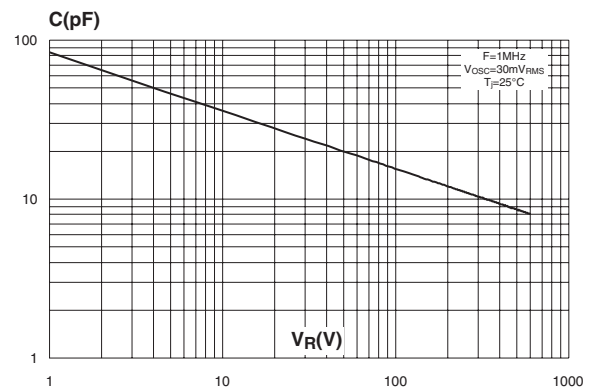


Figure 13: Thermal resistance junction to ambient versus copper surface under tab (epoxy FR4, $e_{CU}=35\mu\text{m}$) (D²PAK)

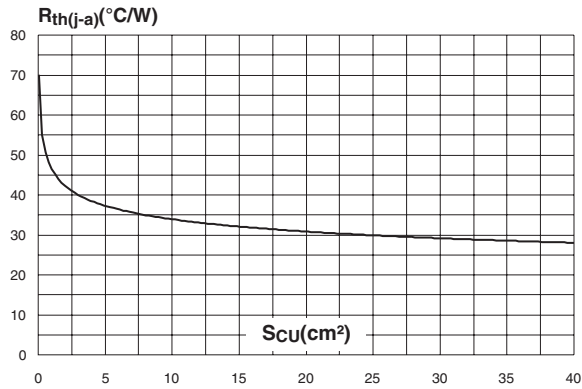


Figure 14: TO-220AB Package Mechanical Data

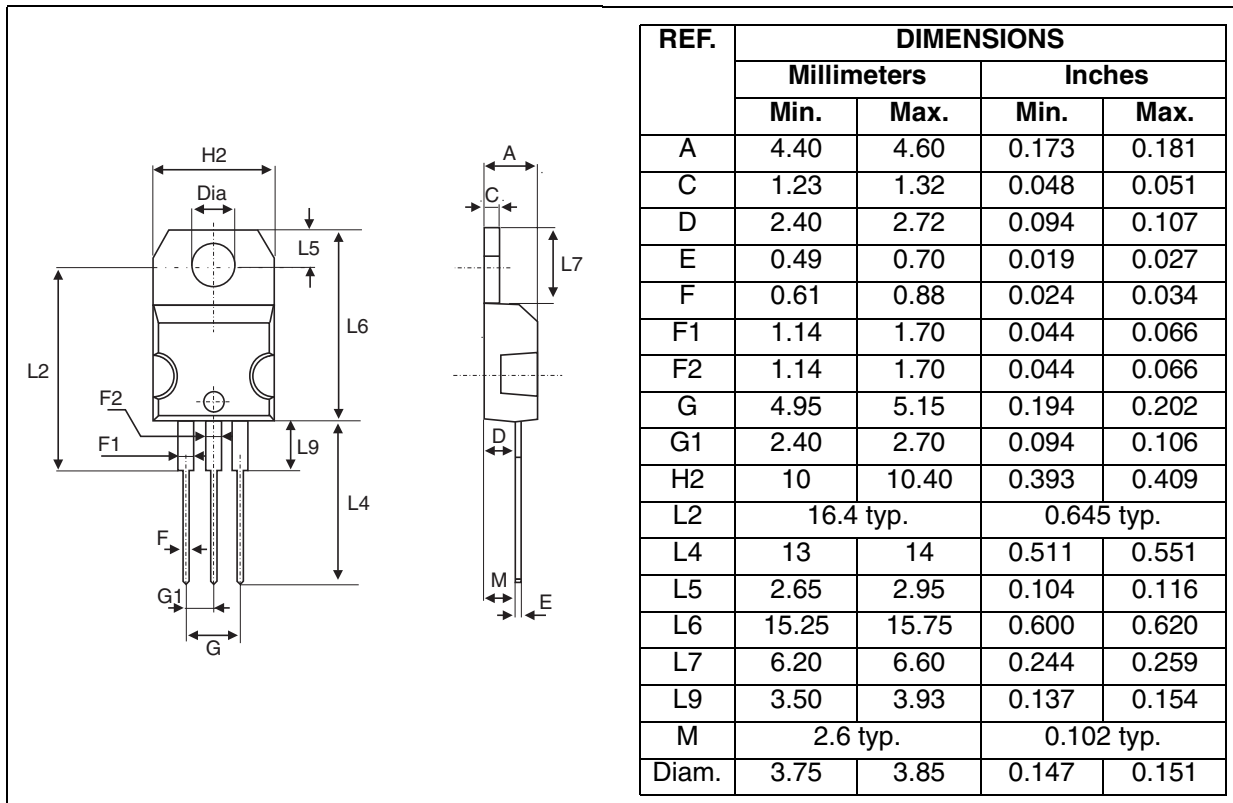


Figure 15: D²PAK Package Mechanical Data

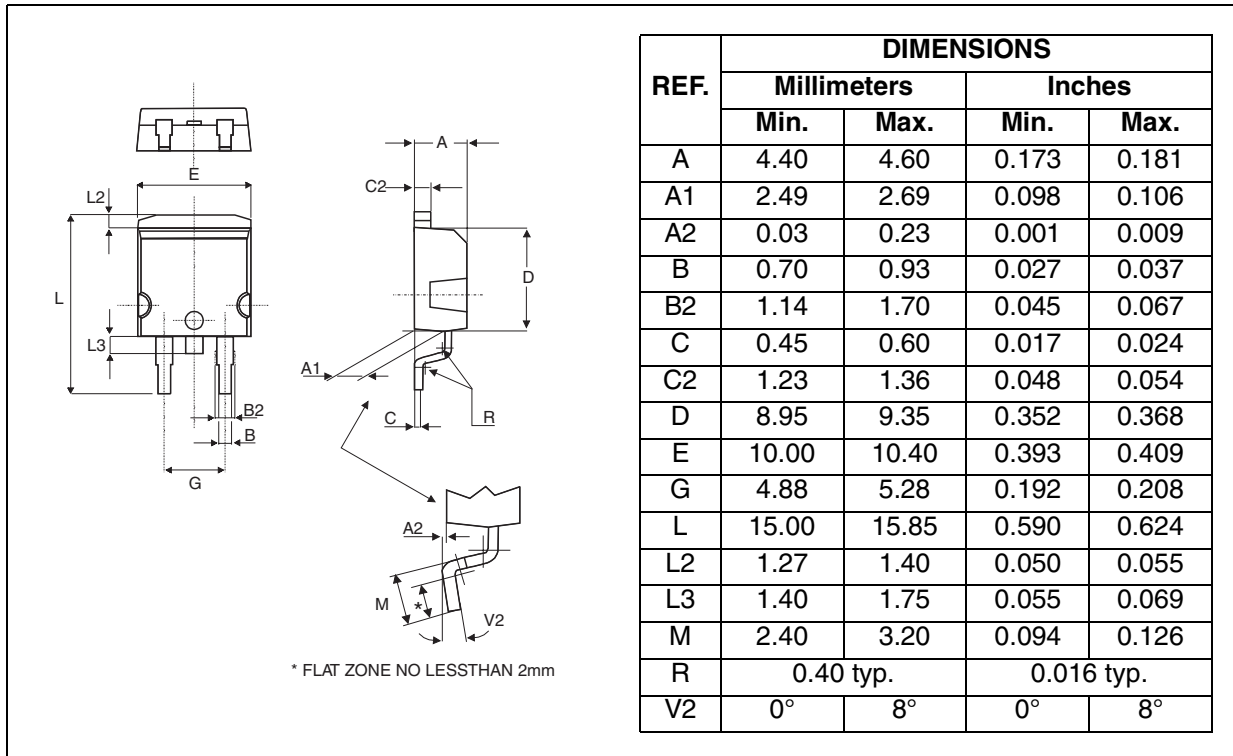


Figure 16: D²PAK Foot Print Dimensions (in millimeters)

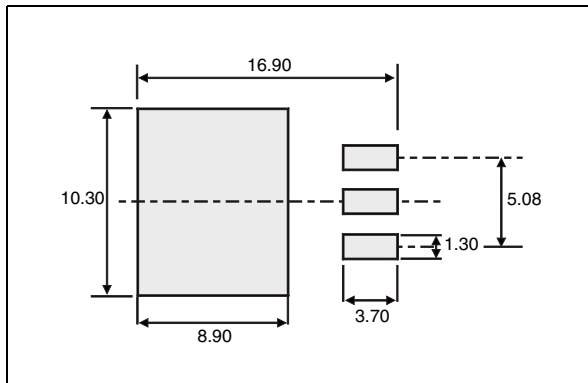


Figure 17: TO-220FPAB Package Mechanical Data

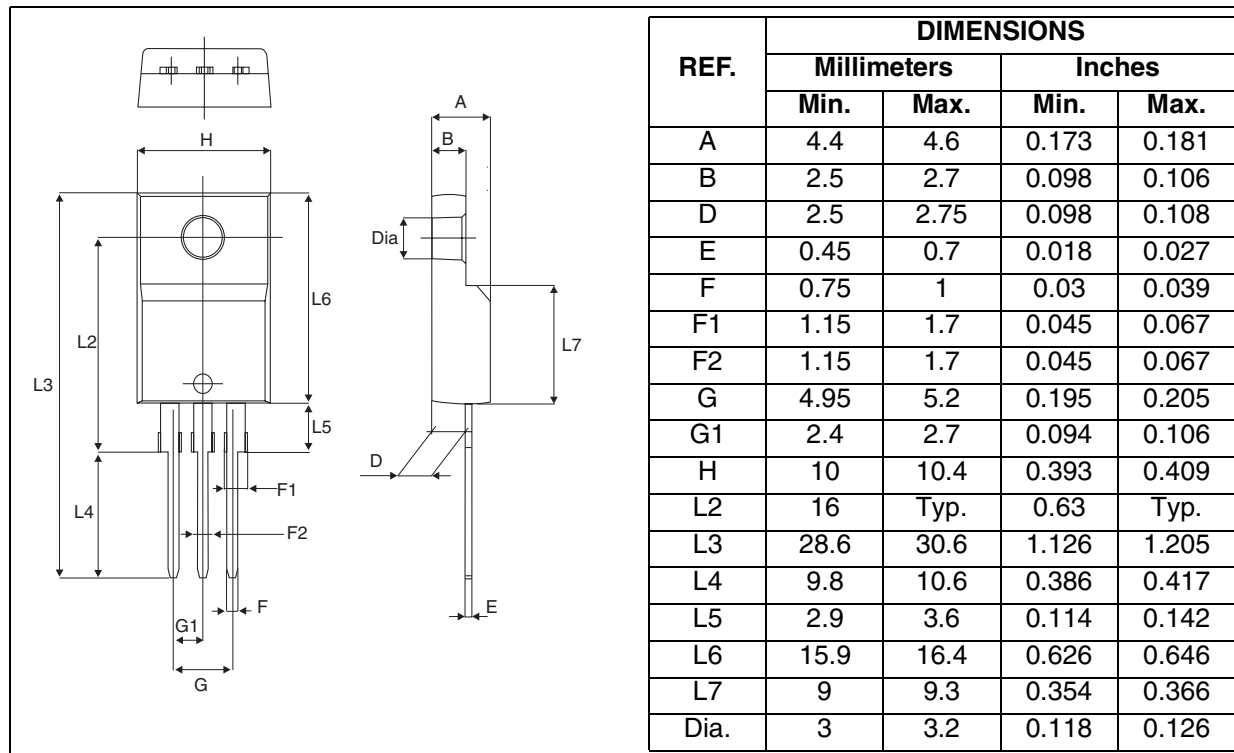


Table 7: Ordering Information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STTH16L06CT	STTH16L06CT	TO-220AB	2.23 g	50	Tube
STTH16L06CG	STTH16L06CG	D ² PAK	1.48 g	50	Tube
STTH16L06CG-TR	STTH16L06CG	D ² PAK	1.48 g	1000	Tape & eel
STTH16L06CFP	STTH16L06CFP	TO-220FPAB	1.70 g	50	Tube

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 m.N. (TO-220FPAB) / 0.55 m.N. (TO-220AB)
- Maximum torque value: 1.0 m.N. (TO-220FPAB) / 0.70 m.N. (TO-220AB)

Table 8: Revision History

Date	Revision	Description of Changes
07-Sep-2004	1	First issue

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com