




8 7 6 5 4 3 2 1




3 PIN

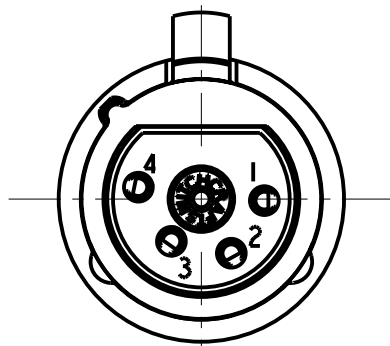


4 PIN

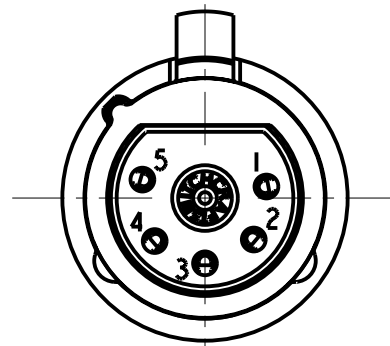

5 PIN

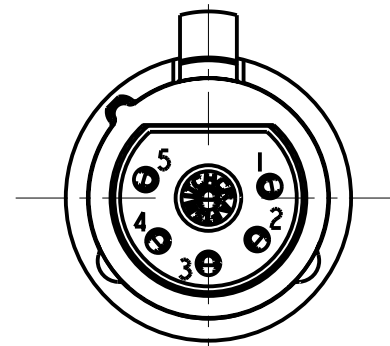

6 PIN

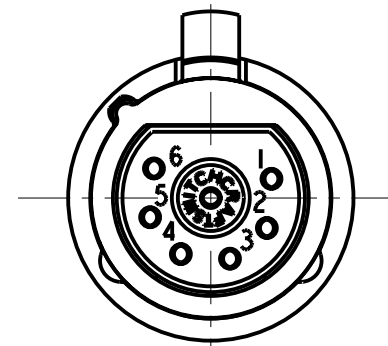

7 PIN

STANDARD SERIES

INSERT SCREW - STAINLESS STEEL
FLEX SCREW - STEEL, NICKEL PLATED
HOUSING - ZINC, NICKEL PLATED
SHELL - STAINLESS STEEL
LATCH BUTTON - ZINC, NICKEL PLATED
LATCH SPRING - STAINLESS STEEL
CONTACTOR - BERYLLIUM COPPER, NICKEL PLATE
TUBULAR INSULATOR - MYLAR
SOLDER TERMINAL - BRASS, ELECTRO TIN
FLEX RELIEF - HI-FAX, BLACK - STANDARD (X)
CLAMP PLATE - STAINLESS STEEL
INSULATORS - POLYESTER, GREEN
CONTACTS - BRASS, SILVER PLATED

- A F
- COLOR OF FLEX RELIEF
- 01 = BROWN
 - 02 = RED
 - 03 = ORANGE
 - 04 = YELLOW
 - 05 = GREEN
 - 06 = BLUE
 - 07 = VIOLET
 - 08 = GRAY
 - 09 = WHITE
 - 11 = TAN
 - 12 = PINK
 - 13 = DARK BLUE
- CONTACT PLATING
- BLANK = SILVER (STANDARD)
 - AU = GOLD
- HOUSING FINISH (SEE NOTE 2)
- BLANK = NICKEL PLATE (STANDARD)
 - BX = BLACK, RoHS
- LATCH TYPE
- BLANK = STANDARD LATCHLOCK
 - D = FAS-DIS-CONNECT DETENT (SEE FIGURE 3)
- FLEX RELIEF SIZE
- BLANK = STANDARD SIZE (0.210 TO 0.300)
 - L = LARGE CABLES (0.300 TO .0328)
 - S = SMALL CABLES (0.105 TO 0.205)
- NO. OF CONTACTS:
- 3 = 3 CONTACTS
 - 4 = 4 CONTACTS
 - 5 = 5 CONTACTS
 - 6 = 6 CONTACTS
 - 7 = 7 CONTACTS

PROFESSIONAL SERIES

SAME AS ABOVE EXCEPT
CONTACT PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL
HOUSING - NON REFLECTIVE VEL-TONE FINISH
FLEX RELIEF - GRAY

- OGP 22
- NO. OF CONTACTS:
- 3 = 3 CONTACTS

NOTE:

- ALL DIMENSIONS REF. UNLESS OTHERWISE SPECIFIED.
- BLACK HOUSING AND INSERT WITH SATIN NICKEL PLATED LATCH.
- THIS PRODUCT IS RoHS COMPLIANT.



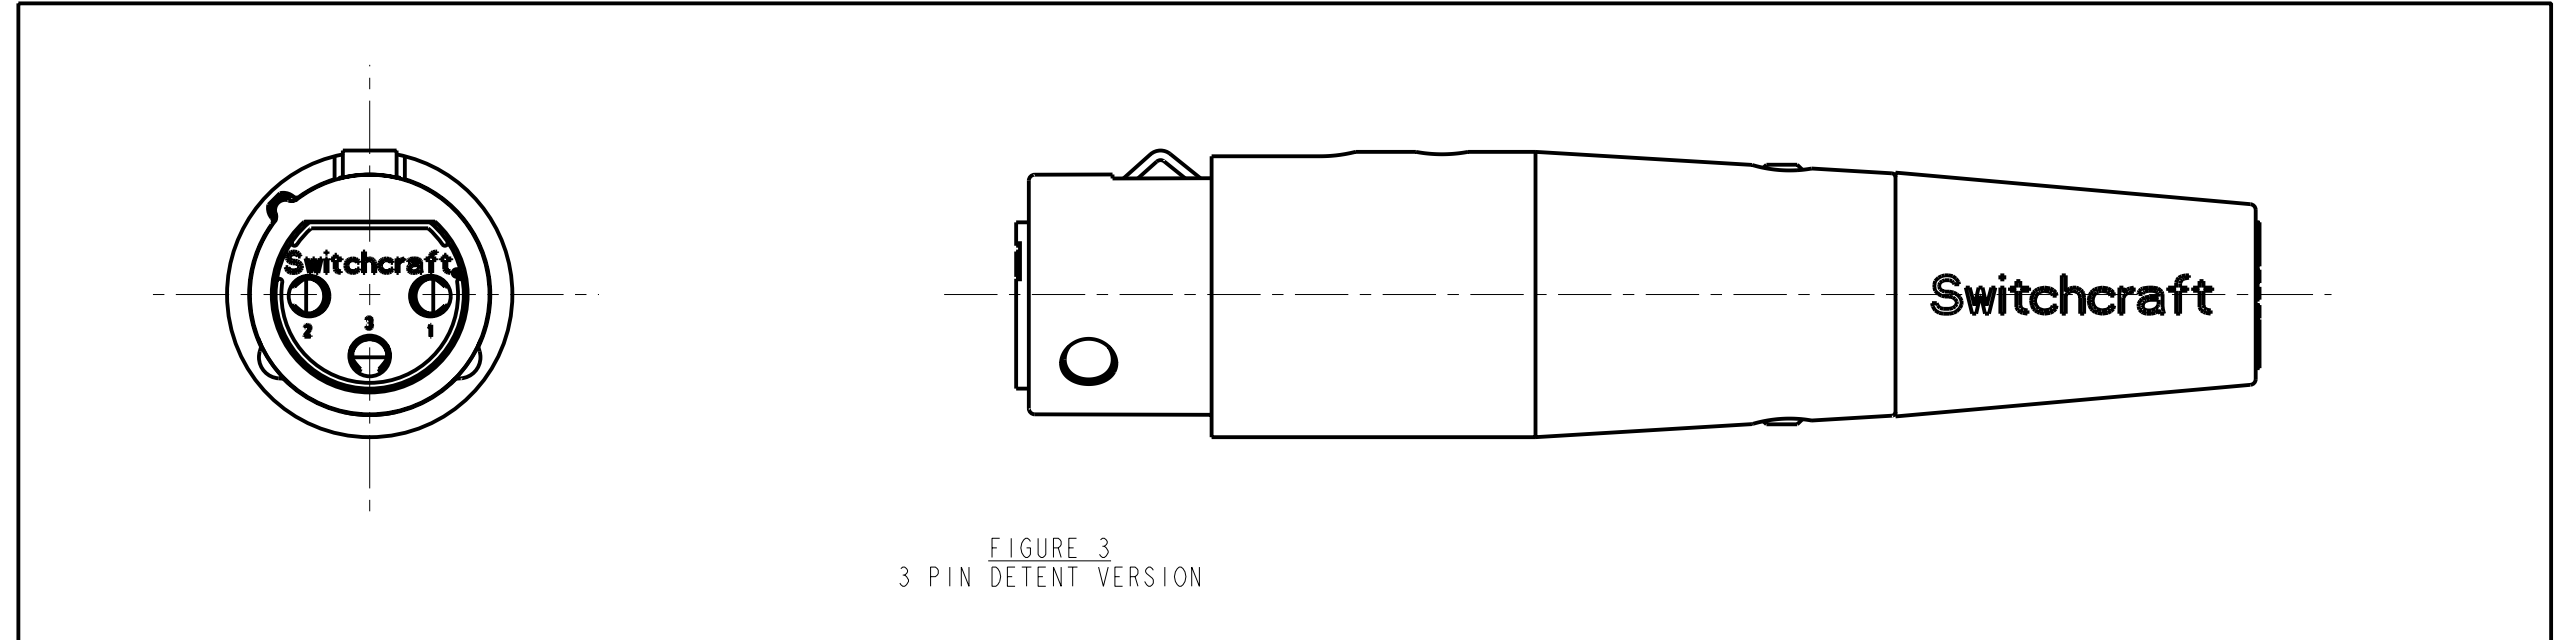


FIGURE 3
3 PIN DETENT VERSION

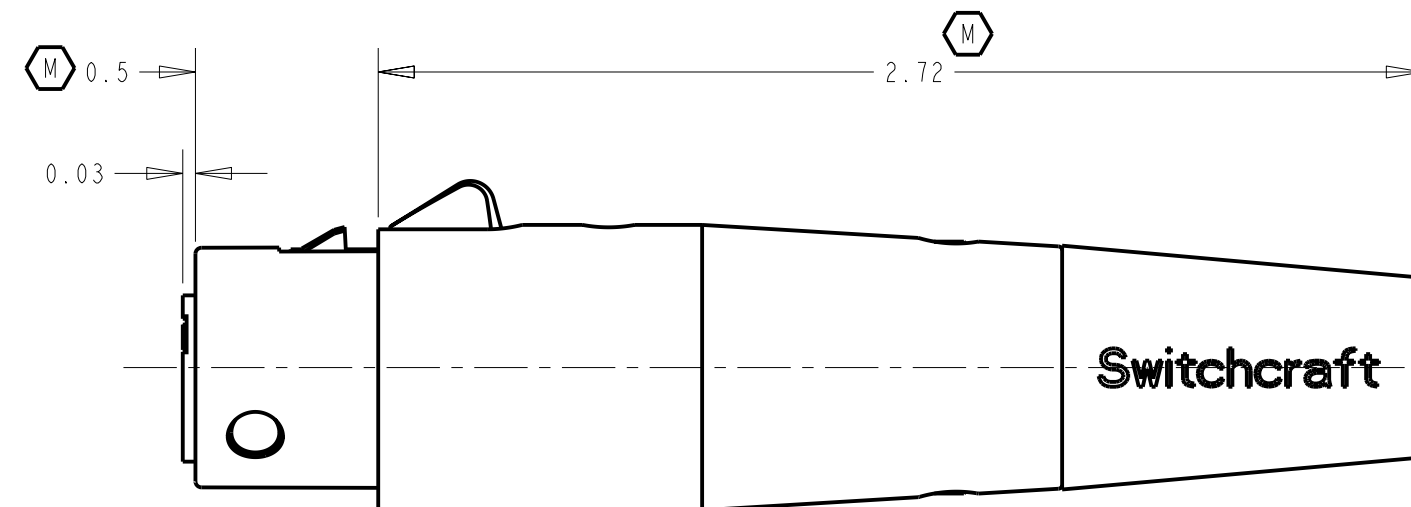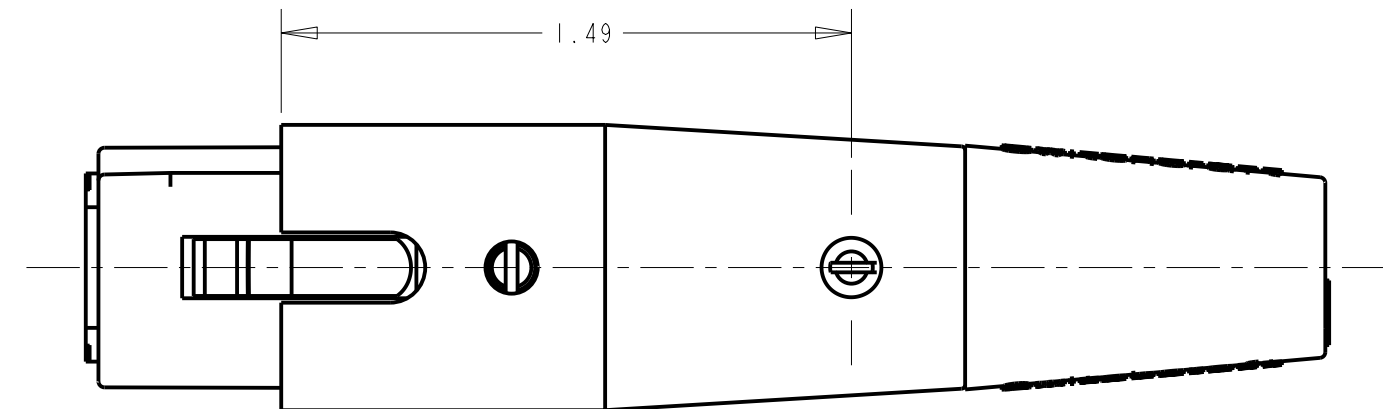

CUSTOMER DRAWING

						★ STAR SYMBOL DENOTES CRITICAL DIMENSION		THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.											
						UNLESS OTHERWISE SPECIFIED		SIZE		WIDTH		MULT		LBS/M		TEMPER			
						1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.		FINISH SPEC No.				MATERIAL SPEC No.							
						2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002		FIRST USED ON				SCALE 2:1				Switchcraft®			
X	26158	10-17-07	TJK	TJK		3. REMOVE ALL BURRS		DATE DRAWN 10-26-93		BY SG		CHKD SG 1-19-95		APVD GHJ 1-19-95					
W	ECO #22530	12-21-98	MM	EB		DO NOT SCALE DRAWING		NAME "A" SERIES FEMALE OG, ROHS				PART No. A F SERIES				REV X			
V	22353	6-12-98	DA	EB															
REV	ECO NUMBER	DATE	BY	APVD															
REVISIONS																			