


C1005X7R1A104K050BB (TDK item description : C1005X7R1A104KT****)

Applications  Commercial Grade

Feature  General (Up to 50V)

Series C1005 [EIA CC0402]

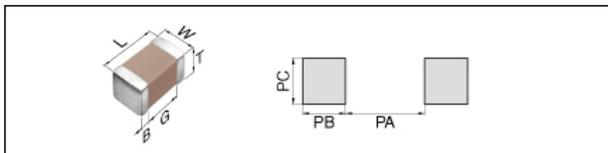

Size	
Length(L)	1.00mm +/-0.05mm
Width(W)	0.50mm +/-0.05mm
Thickness(T)	0.50mm +/-0.05mm
Terminal Width(B)	0.10mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern(PA)	0.30 to 0.50mm
Recommended Land Pattern(PB)	0.35 to 0.45mm
Recommended Land Pattern(PC)	0.40 to 0.60mm
Recommended Slit Pattern(SD)	


Electrical Characteristics	
Capacitance	100nF +/-10%
Rated Voltage	10Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	1000MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C1005X7R1A104K050BB


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

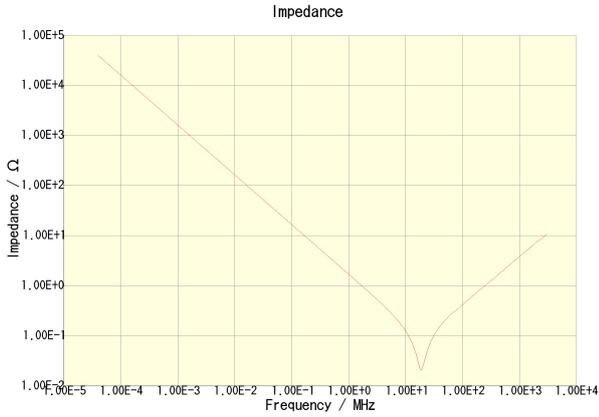


C1005X7R1A104K050BB

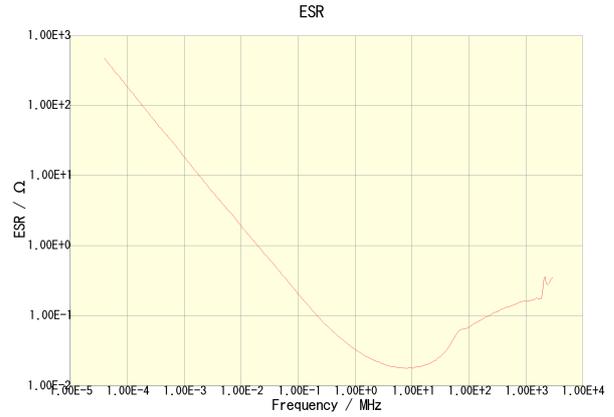

C1005X7R1A104K050BB

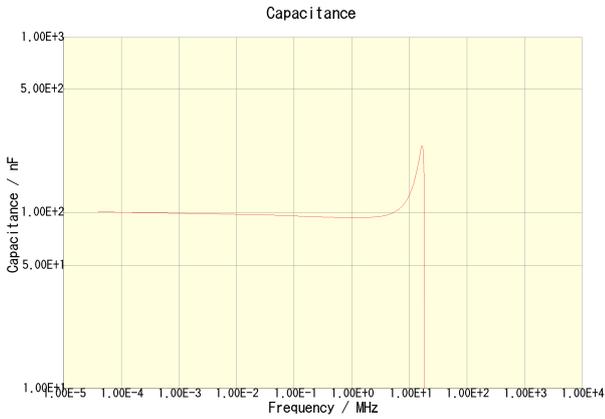


C1005X7R1A104K050BB

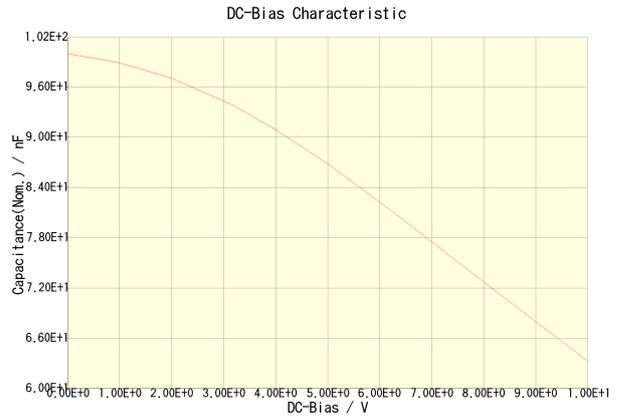

C1005X7R1A104K050BB



C1005X7R1A104K050BB(DC Bias = 0V) C1005X7R1A104K050BB(DC Bias = 5V)

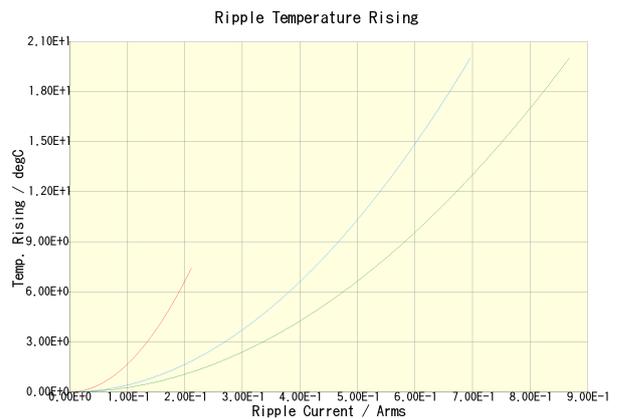

C1005X7R1A104K050BB(100kHz) C1005X7R1A104K050BB(500kHz)
C1005X7R1A104K050BB(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.