


### ST Connectors (Epoxy/Polish)

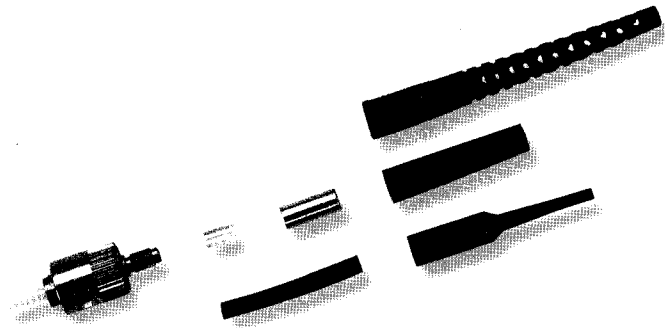

#### Product Facts

- ⌘ Each connector kit comes with accessories needed to terminate to 250 μm fiber, 900 μm tight-buffered fiber, 900 μm easy-strip, buffer tube splitter kits, 1.6 - 2.0 mm and 3 mm cable (select appropriate part number)
- ⌘ Boot type and coupling nut options (select appropriate part number)
- ⌘ Suitable for use with heat-cured or anaerobic (quick cure) epoxies
  - See Instruction Sheet for recommended anaerobic epoxies
- ⌘ Pre-radiused ceramic ferrules for easy polishing
- ⌘ Multimode connectors are suitable for use with 50/125 μm, XG (850 nm LO 50/125 μm) and 62.5/125 μm fibers
- ⌘ Mates with standard couplers, adapters and adapter plates


4.2

CONNECTORS, MECHANICAL SPLICES, COUPLERS & ADAPTERS

Fiber Type	Ferrule Type	Body	Coupling Nut	Boot Type & Color	Part Number
Single-mode	Ceramic	Nickel-plated Brass	Zinc	900 μm	5503613-2
			Die Cast	Bend-Limiting, Yellow	502579-2
			Zinc	Short, Yellow	5502580-2
Multimode	Ceramic	Polymer	Polymer	Short, Black, 900 μm	503571-3
		Nickel-plated Brass	Die Cast	Bend-Limiting, Black	5492458-1
				Short, Black	1-5501380-6

NOTE: Highlighted part numbers are routinely stocked for shortest lead times.

### CORELINK Optical Fiber Splices

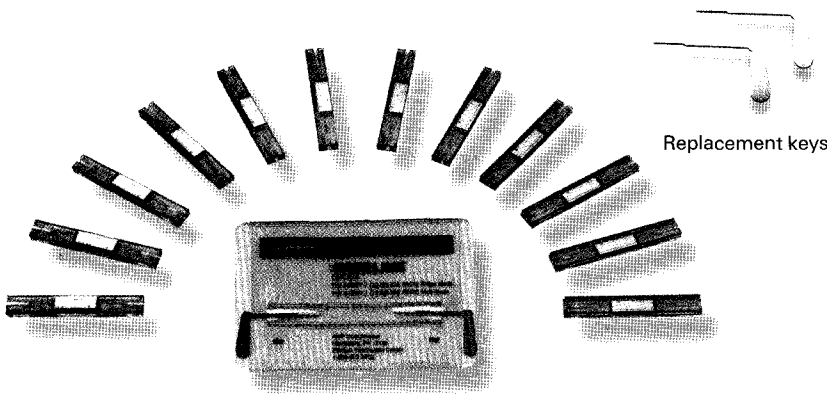

#### Product Facts

- ⌘ Each CORELINK splice mates two 900 μm tight-buffered fibers or two 250 μm coated fibers
- ⌘ Easy to install
- ⌘ Reusable
- ⌘ No bench tool required
- ⌘ Splices sold in packs of 12
  - Includes 2 actuator keys
- ⌘ Optional CORELINK installation tool shown on page 263

Description			Part Number
CORELINK Splice	Single-mode	Clear	503577-1
	Multimode	Blue	503901-1
2 Replacement keys in key holder	-		503681-1

NOTE: Highlighted part numbers are routinely stocked for shortest lead times.