
— , —

ALL RIGHTS RESERVED.

2351461-4



3-Ø1

PRELIMINARY


REV

1470-19 (1/15)

— , —


ALL RIGHTS RESERVED.

2351461-5

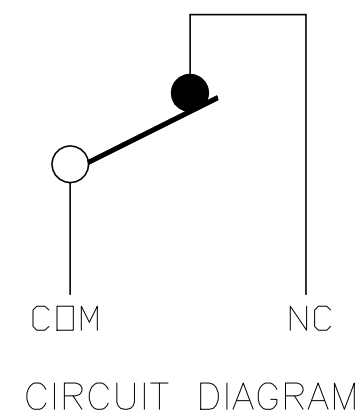

PRELIMINARY

REV	
-----	--

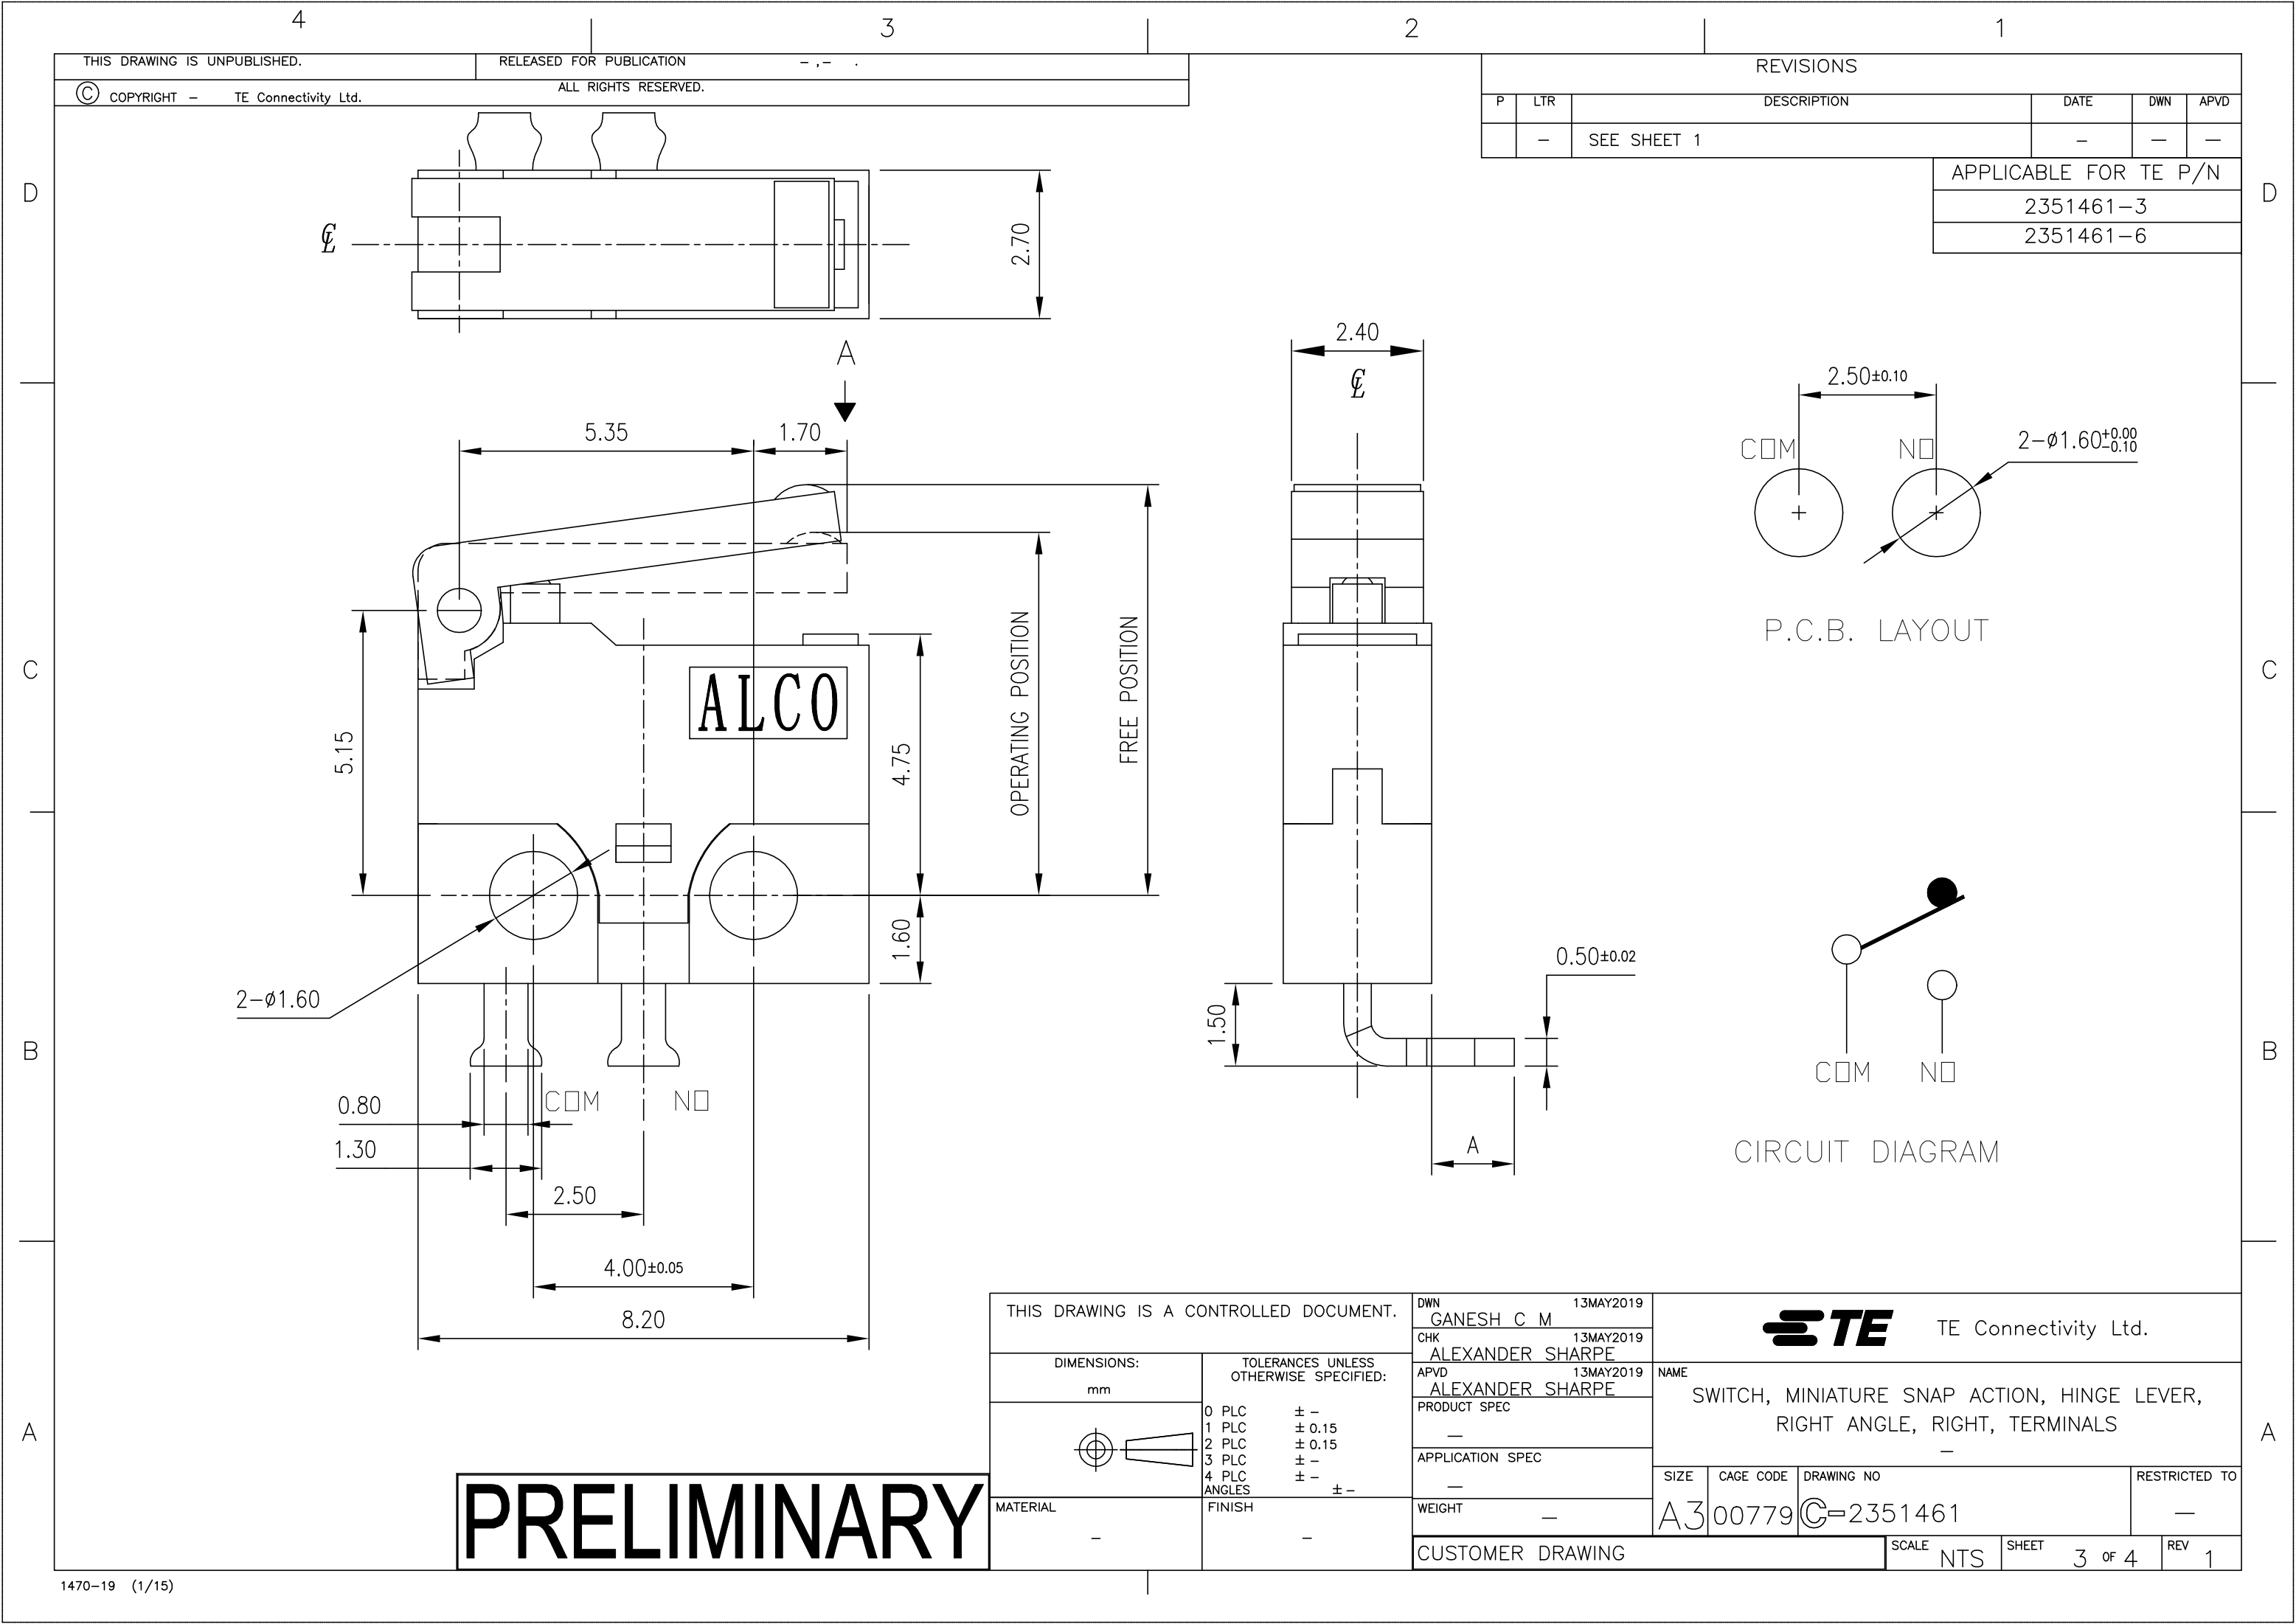

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

APPLICABLE FOR TE P/N

2351461-3

2351461-6

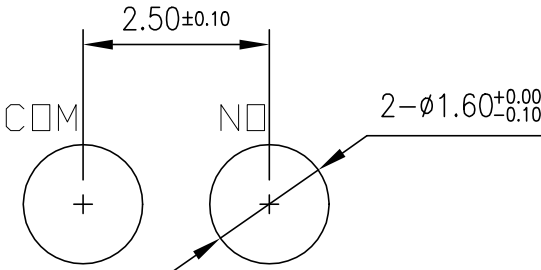

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 13MAY2019

GANESH C M

CHK 13MAY2019

ALEXANDER SHARPE

APVD 13MAY2019

ALEXANDER SHARPE

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity Ltd.


NAME
SWITCH, MINIATURE SNAP ACTION, HINGE LEVER,
RIGHT ANGLE, RIGHT, TERMINALS

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C=2351461

SCALE NTS SHEET 3 of 4 REV 1

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.15
2 PLC ± 0.15
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

PRELIMINARY

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION -,-.
© COPYRIGHT - TE Connectivity Ltd.	ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTES:

1. OPERATING CHARACTERISTICS ARE FOR OPERATION IN THE A DIRECTION ↓
2. PACKAGING:
SWITCHES ARE BULK PACKAGED IN BAGS, 500 SWITCHES PER BAG, 2 BAGS PER BOX.
3. COMPLIANCE:
THE CURRENT STATEMENT OF COMPLIANCE IS AVAILABLE AT TE.COM.
4. MATERIAL AND FINISH:
COVER: THERMOPLASTIC, BLACK
BASE: THERMOPLASTIC, BLACK
BUTTON: THERMOPLASTIC, BLACK
CONTACT: SILVER ALLOY
TERMINAL: BRASS, SILVER PLATED
SPRING PLATE: COPPER ALLOY
LEVER: THERMOPLASTIC, BLACK
5. SPECIFICATIONS:
CURRENT RATING: SEE TABLE
CONTACT RESISTANCE: 100mΩ MAXIMUM, INITIAL, AT FREE POSITION AND TOTAL TRAVEL POSITION
INSULATION RESISTANCE: 100MΩ MINIMUM, @ 100 V DC, 1 MINUTE, INITIAL.
DIELECTRIC WITHSTANDING VOLTAGE, BETWEEN TERMINALS OF THE SAME POLARITY: 250 V AC, 50 TO 60 Hz FOR 1 MINUTE
DIELECTRIC WITHSTANDING VOLTAGE, BETWEEN EACH TERMINAL AND GROUND: 250 V AC, 50 TO 60 Hz FOR 1 MINUTE
DIELECTRIC WITHSTANDING VOLTAGE, BETWEEN EACH TERMINAL AND NON-CURRENT CARRYING METAL PART :1500 V AC, 50 TO 60 Hz FOR 1 MINUTE
6. SOLDER PROCESS:
MANUAL SOLDERING: 350°C, 3 SECONDS MAXIMUM, 30 TO 40 WATTS. PREVENT SOLDER AND FLUX CONTACTING THE SWITCH BODY.
DO NOT OPERATE THE SWITCH DURING THE FIRST MINUTE AFTER SOLDERING.
WAVE SOLDERING: 260°C, 5 SECONDS MAXIMUM. PREVENT SOLDER AND FLUX CONTACTING THE SWITCH BODY.
DO NOT OPERATE THE SWITCH DURING THE FIRST MINUTE AFTER SOLDERING.

SILVER	SPST, NORMALLY OPEN	100,000 CYCLES, MINIMUM	50,000 CYCLES, MINIMUM	-40 TO +85°C/85% RELATIVE HUMIDITY MAXIMUM	-40 TO +85°C/60% RELATIVE HUMIDITY MAXIMUM	0.70 MAXIMUM	0.30 MINIMUM	1.80 MAXIMUM	6.7±0.5	8.0 MAXIMUM	3 gf MINIMUM	50 gf MAXIMUM	0.5A, 30V DC	MOMENTARY	3.10	RIGHT ANGLE, RIGHT	SAJ405XHL0N30SNOLRQ	2351461-6	
	SPST, NORMALLY CLOSED																SAJ405XHL0N30SNCLRQ	2351461-5	
	SPDT																SAJ405XHL0N30SDTLRQ	2351461-4	
	SPST, NORMALLY OPEN														1.50		SAJ405XHL0N30SNOSRQ	2351461-3	
	SPST, NORMALLY CLOSED																SAJ405XHL0N30SNCSRQ	2351461-2	
	SPDT																SAJ405XHL0N30SDTSRQ	2351461-1	
CONTACT FINISH	CONTACT FORM	MECHANICAL LIFE	ELECTRICAL LIFE	STORAGE TEMPERATURE RANGE/HUMIDITY RANGE	OPERATING TEMPERATURE RANGE/HUMIDITY RANGE	MOVEMENT DIFFERENTIAL	OVERTRAVEL	PRETRAVEL	OPERATING POSITION	FREE POSITION	RELEASE FORCE	OPERATING FORCE	CONTACT RATING	CONTACT CONFIGURATION	DIMENSION "A"	TERMINAL TYPE	TE SMART PART NUMBER	PART NUMBER	

PRELIMINARY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GANESH C M 13MAY2019	 TE Connectivity Ltd.				
		CHK ALEXANDER SHARPE 13MAY2019					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD ALEXANDER SHARPE 13MAY2019	NAME				
	0 PLC ± - 1 PLC ± 0.15 2 PLC ± 0.15 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC —	SWITCH, MINIATURE SNAP ACTION, HINGE LEVER, RIGHT ANGLE, RIGHT, TERMINALS —				
MATERIAL —	FINISH —	APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C=2351461	RESTRICTED TO —	
CUSTOMER DRAWING					SCALE NTS	SHEET 4 of 4	REV 1