


FEATURES


- ±1% Output Tolerance at 25°C
- ±2% Output Tolerance Over Full Operating Range
- Thermal Shutdown



- Pinout Identical to μA7800 Series
- Improved Version of μA7800 Series







DESCRIPTION/ORDERING INFORMATION

Each fixed-voltage precision regulator in the TL780 series is capable of supplying 1.5 A of load current. A unique temperature-compensation technique, coupled with an internally trimmed band-gap reference, has resulted in improved accuracy when compared to other three-terminal regulators. Advanced layout techniques provide excellent line, load, and thermal regulation. The internal current-limiting and thermal-shutdown features essentially make the devices immune to overload.

ORDERING INFORMATION

TJ	V _O TYP (V)	PACKAGE ⁽¹⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
		PowerFLEX [™] – KTE	Reel of 2000	TL780-05CKTER	TL780-05C
	5	TO-220 – KC	Tube of 50	TL780-05CKC	TL780-05C
	5	TO-220, short shoulder – KCS	Tube of 20	TL780-05KCS	TL780-05
0°C to 125°C		TO-263 – KTT	Reel of 500	TL780-05CKTTR	TL780-05C
0 0 10 125 0	12	TO-220 – KC	Tube of 50	TL780-12CKC	TL780-12C
		TO-220, short shoulder – KCS	Tube of 20	TL780-12KCS	TL780-12
	15	TO-220 – KC	Tube of 50	TL780-15CKC	TL780-15C
		TO-220, short shoulder – KCS	Tube of 20	TL780-15KCS	TL780-15


(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerFLEX, PowerPAD are trademarks of Texas Instruments.



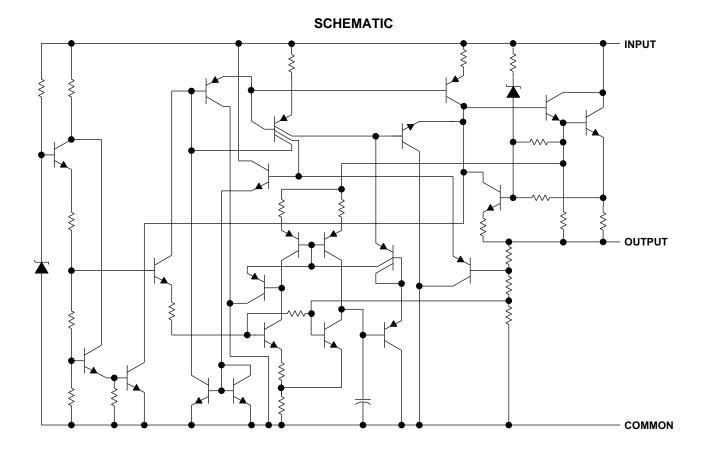

Absolute Maximum Ratings(1)

over operating temperature ranges (unless otherwise noted)

		MIN	MAX	UNIT
V_{I}	Input voltage		35	V
TJ	Operating virtual junction temperature		150	°C
	Lead temperature 1,6 mm (1/16 in) from case for 10 s		260	°C
T _{stg}	Storage temperature range	-65	150	°C

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Package Thermal Data⁽¹⁾

PACKAGE	BOARD	θ _{JP} ⁽²⁾	θјс	θ_{JA}
PowerFLEX (KTE)	High K, JESD 51-5	2.7°C/W	11.6°C/W	23.3°C/W
TO-220 (KC/KCS)	High K, JESD 51-5	3°C/W	17°C/W	19°C/W
TO-263 (KTT)	High K, JESD 51-5	1.91°C/W	18°C/W	25.3°C/W

- (1) Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability. Due to variations in individual device electrical characteristics and thermal resistance, the built-in thermal overload protection may be activated at power levels slightly above or below the rated dissipation.
- (2) For packages with exposed thermal pads, such as QFN, PowerPADTM, or PowerFLEX, θ_{JP} is defined as the thermal resistance between the die junction and the bottom of the exposed pad.



SLVS055M-APRIL 1981-REVISED OCTOBER 2006

Recommended Operating Conditions

			MIN	MAX	UNIT
		TL780-05C	7	25	
V_{I}	Input voltage	TL780-12C	14.5	30	V
		TL780-15C	17.5	30	
Io	Output current			1.5	Α
T_{J}	Operating virtual junction temperature		0	125	°C

Electrical Characteristics

at specified virtual junction temperature, V_{I} = 10 V, I_{O} = 500 mA (unless otherwise noted)

DADAMETED	TEST COMPITIONS	T (1)	TL780-05C			LINUT
PARAMETER	TEST CONDITIONS	TEST CONDITIONS T _J ⁽¹⁾		TYP	MAX	UNIT
Output voltogo	$I_{O} = 5 \text{ mA to 1 A, P} \le 15 \text{ W,}$	25°C	4.95	5	5.05	V
Output voltage	$V_I = 7 \text{ V to } 20 \text{ V}$	0°C to 125°C	4.9		5.1	V
lanut valtage regulation	V _I = 7 V to 25 V	25°C		0.5	5	m\/
Input voltage regulation	$V_I = 8 V \text{ to } 12 V$	25°C		0.5	5	mV
Ripple rejection	V _I = 8 V to 18 V, f = 120 Hz	0°C to 125°C	70	85		dB
Output voltage regulation	I _O = 5 mA to 1.5 A	25°C	2		25	mV
Output voltage regulation	$I_O = 250$ mA to 750 mA	25 C		1.5	15	
Output resistance	f = 1 kHz	0°C to 125°C		0.0035		Ω
Temperature coefficient of output voltage	I _O = 5 mA	0°C to 125°C		0.25		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz	25°C		75		μV
Dropout voltage	I _O = 1 A	25°C		2		V
Input bias current		25°C		5	8	mA
lanut biog gurrant abonce	V _I = 7 V to 25 V	0°C to 125°C		0.7	1.3	mA
Input bias-current change	$I_O = 5$ mA to 1 A	0°C to 125°C		0.003	0.5	
Short-circuit output current		25°C		750		mA
Peak output current		25°C		2.2		Α

⁽¹⁾ Pulse-testing techniques maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33-μF capacitor across the input and a 0.22-μF capacitor across the output.

TL780 SERIES POSITIVE-VOLTAGE REGULATORS

SLVS055M-APRIL 1981-REVISED OCTOBER 2006



Electrical Characteristics

at specified virtual junction temperature, $V_I = 19 \text{ V}$, $I_O = 500 \text{ mA}$ (unless otherwise noted)

DADAMETED	TEST COMPITIONS	T (1)	TL780-12C		UNIT	
PARAMETER	TEST CONDITIONS	T _J ⁽¹⁾	MIN	TYP	MAX	UNII
Output voltogo	$I_{O} = 5 \text{ mA to 1 A, P} \le 15 \text{ W,}$	25°C	11.88	12	12.12	V
Output voltage	$V_1 = 14.5 \text{ V to } 27 \text{ V}$	0°C to 125°C	11.76		12.24	V
Input voltage regulation	$V_I = 14.5 \text{ V to } 30 \text{ V}$	25°C		1.2	12	m\/
Input voltage regulation	$V_{I} = 16 \text{ V to } 22 \text{ V}$	25 C		1.2	12	mV
Ripple rejection	$V_I = 15 \text{ V to } 25 \text{ V}, f = 120 \text{ Hz}$	0°C to 125°C	65	80		dB
Output valtage regulation	I _O = 5 mA to 1.5 A	2500	6.5		60	mV
Output voltage regulation	$I_O = 250$ mA to 750 mA	25°C		2.5	36	IIIV
Output resistance	f = 1 kHz	0°C to 125°C		0.0035		Ω
Temperature coefficient of output voltage	I _O = 5 mA	0°C to 125°C		0.6		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz	25°C		180		μV
Dropout voltage	I _O = 1 A	25°C		2		V
Input bias current		25°C		5.5	8	mA
land bing summed the same	V _I = 14.5 V to 30 V	000 +- 40500		0.4	1.3	mA
Input bias-current change	$I_O = 5$ mA to 1 A	0°C to 125°C		0.03	0.5	
Short-circuit output current		25°C		350		mA
Peak output current		25°C		2.2		Α

⁽¹⁾ Pulse-testing techniques maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33-μF capacitor across the input and a 0.22-μF capacitor across the output.

Electrical Characteristics


at specified virtual junction temperature, $V_1 = 23 \text{ V}$, $I_0 = 500 \text{ mA}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T (1)	TL780-15C			UNIT
PARAMETER	TEST CONDITIONS	T _J ⁽¹⁾	MIN	TYP	MAX	ONI
Output voltogo	$I_{O} = 5 \text{ mA to 1 A, P} \le 15 \text{ W,}$	25°C	14.85	15	15.15	V
Output voltage	$V_1 = 17.5 \text{ V to } 30 \text{ V}$	0°C to 125°C	14.7		15.3	V
loguit voltage regulation	V _I = 17.5 V to 30 V	25°C		1.5	15	mV
Input voltage regulation	V _I = 20 V to 26 V	25°C		1.5	15	IIIV
Ripple rejection	V _I = 18.5 V to 28.5 V, f = 120 Hz	0°C to 125°C	60	75		dB
Output voltage regulation	I _O = 5 mA to 1.5 A	25°C		7	75	mV
Output voltage regulation	I _O = 250 mA to 750 mA	25°C		2.5	45	
Output resistance	f = 1 kHz	0°C to 125°C		0.0035		Ω
Temperature coefficient of output voltage	I _O = 5 mA	0°C to 125°C		0.62		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz	25°C		225		μV
Dropout voltage	I _O = 1 A	25°C		2		V
Input bias current		25°C		5.5	8	mA
Innut bing assument about	V _I = 17.5 V to 30 V	000 +- 40500		0.4	1.3	mA
Input bias-current change	I _O = 5 mA to 1 A	0°C to 125°C		0.02	0.5	
Short-circuit output current		25°C		230		mA
Peak output current		25°C		2.2		Α

⁽¹⁾ Pulse-testing techniques maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33-μF capacitor across the input and a 0.22-μF capacitor across the output.



PARAMETER MEASUREMENT INFORMATION



- A. Permanent damage can occur when OUTPUT is pulled below ground.
- B. C1 is required when the regulator is far from the power-supply filter.
- C. C2 is not required for stability; however, transient response is improved.

Figure 1. Test Circuit



APPLICATION INFORMATION




Figure 2. Positive Regulator in Negative Configuration (V_I Must Float)




Figure 3. Current Regulator

Operation With a Load Common to a Voltage of Opposite Polarity

In many cases, a regulator powers a load that is not connected to ground, but instead, is connected to a voltage source of opposite polarity (e.g., operational amplifiers, level-shifting circuits, etc.). In these cases, a clamp diode should be connected to the regulator output as shown in Figure 4. This protects the regulator from output polarity reversals during startup and short-circuit operation.




Figure 4. Output Polarity-Reversal-Protection Circuit

Reverse-Bias Protection

Occasionally, the input voltage to the regulator can collapse faster than the output voltage. This, for example, could occur when the input supply is crowbarred during an output overvoltage condition. If the output voltage is greater than approximately 7 V, the emitter-base junction of the series pass element (internal or external) could break down and be damaged. To prevent this, a diode shunt can be employed, as shown in Figure 5.




Figure 5. Reverse-Bias-Protection Circuit

PACKAGE OPTION ADDENDUM



i.com 21-Nov-2006

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp (3)
TL780-05CKC	NRND	TO-220	KC	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-05CKTER	NRND	PFM	KTE	3	2000	TBD	CU SNPB	Level-1-220C-UNLIM
TL780-05CKTTR	ACTIVE	DDPAK/ TO-263	KTT	3	500	Green (RoHS & no Sb/Br)	CU SN	Level-3-245C-168 HR
TL780-05CKTTRG3	ACTIVE	DDPAK/ TO-263	KTT	3	500	Green (RoHS & no Sb/Br)	CU SN	Level-3-245C-168 HR
TL780-05KCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-05KCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-12CKC	NRND	TO-220	KC	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-12CKCE3	NRND	TO-220	KC	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-12CKTER	OBSOLETE	PFM	KTE	3		TBD	Call TI	Call TI
TL780-12KCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-15CKC	NRND	TO-220	KC	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type
TL780-15CKTER	OBSOLETE	PFM	KTE	3		TBD	Call TI	Call TI
TL780-15KCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.




PACKAGE OPTION ADDENDUM

21-Nov-2006

In no event shall TI's liabil	lity arising out of such inform	ation exceed the total nu	urchase price of the TI pa	art(e) at issue in this do	oument sold by T
to Customer on an annual	lity arising out of such inform I basis.	allon exceed the total po	inchase price of the 11 pa	int(s) at issue in this uc	cument sold by T

KTE (R-PSFM-G3)

PowerFLEX™ PLASTIC FLANGE-MOUNT

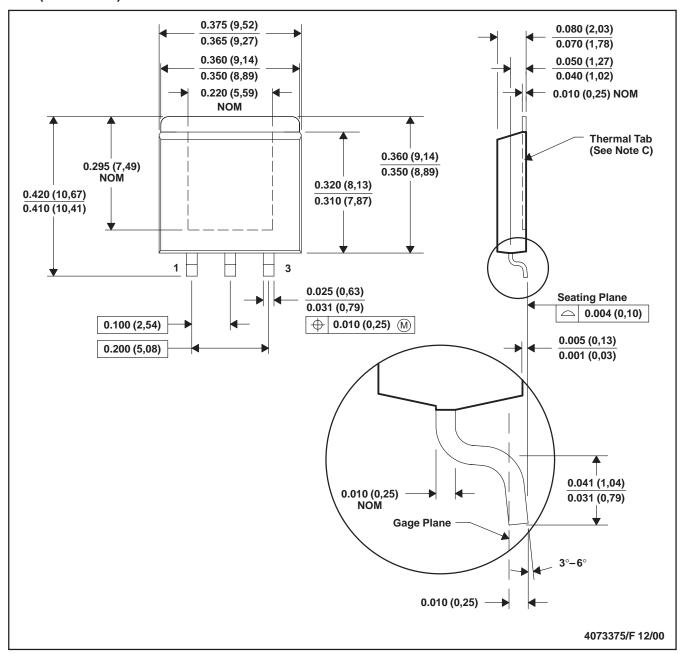


- NOTES: A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. The center lead is in electrical contact with the thermal tab.
 - D. Dimensions do not include mold protrusions, not to exceed 0.006 (0,15).
 - E. Falls within JEDEC MO-169

PowerFLEX is a trademark of Texas Instruments.



KTT (R-PSFM-G3)

PLASTIC FLANGE-MOUNT PACKAGE

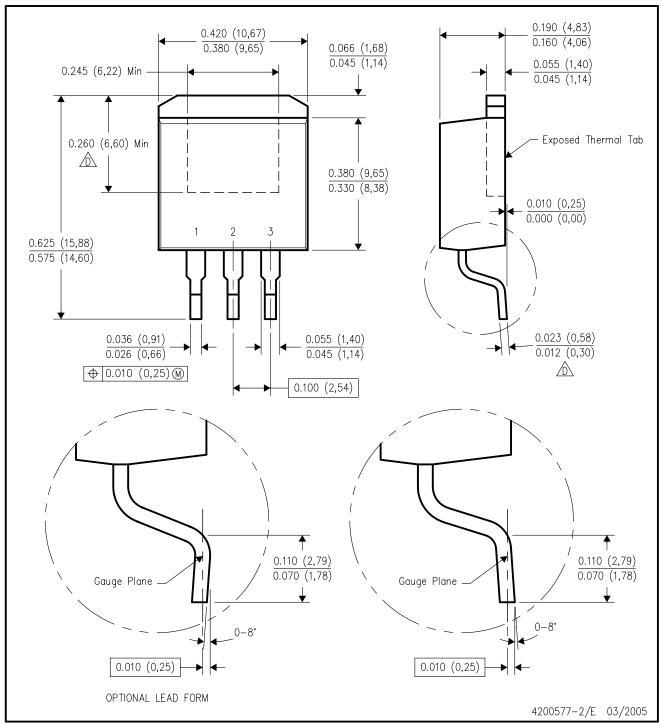


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion. Mold flash or protrusion not to exceed 0.005 (0,13) per side.
- ∱ Falls within JEDEC TO-263 variation AA, except minimum lead thickness and minimum exposed pad length.



KCS (R-PSFM-T3)

PLASTIC FLANGE-MOUNT PACKAGE

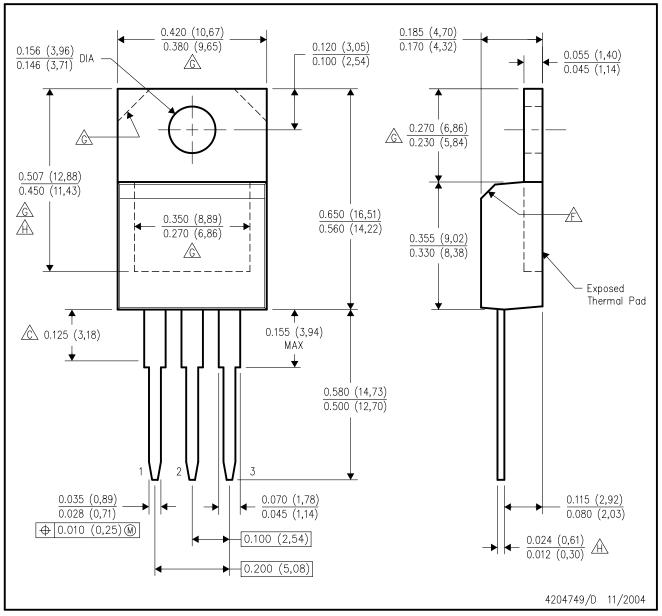


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Lead dimensions are not controlled within this area.
- D. All lead dimensions apply before solder dip.
- E. The center lead is in electrical contact with the mounting tab.
- The chamfer is optional.
- Thermal pad contour optional within these dimensions.
- ⚠ Falls within JEDEC T0—220 variation AB, except minimum lead thickness and minimum exposed pad length.



KC (R-PSFM-T3)

PLASTIC FLANGE-MOUNT PACKAGE

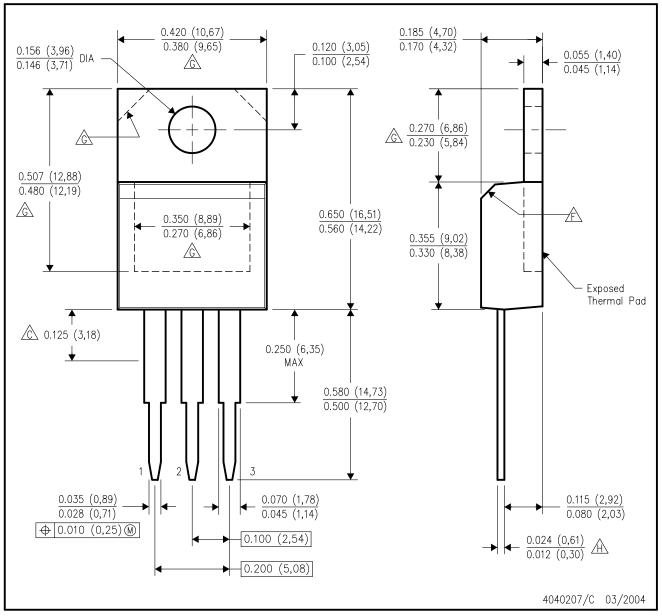

NOTES:

- A. All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- Lead dimensions are not controlled within this area.
- D. All lead dimensions apply before solder dip.
- E. The center lead is in electrical contact with the mounting tab.
- The chamfer is optional.
- Thermal pad contour optional within these dimensions.
- Falls within JEDEC TO-220 variation AB, except minimum lead thickness.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

	Applications	
amplifier.ti.com	Audio	www.ti.com/audio
dataconverter.ti.com	Automotive	www.ti.com/automotive
dsp.ti.com	Broadband	www.ti.com/broadband
interface.ti.com	Digital Control	www.ti.com/digitalcontrol
logic.ti.com	Military	www.ti.com/military
power.ti.com	Optical Networking	www.ti.com/opticalnetwork
microcontroller.ti.com	Security	www.ti.com/security
www.ti.com/lpw	Telephony	www.ti.com/telephony
	Video & Imaging	www.ti.com/video
	Wireless	www.ti.com/wireless
	dataconverter.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com	amplifier.ti.com dataconverter.ti.com dsp.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com www.ti.com/lpw Audio Automotive Broadband Digital Control Military Optical Networking Security Telephony Video & Imaging

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated