
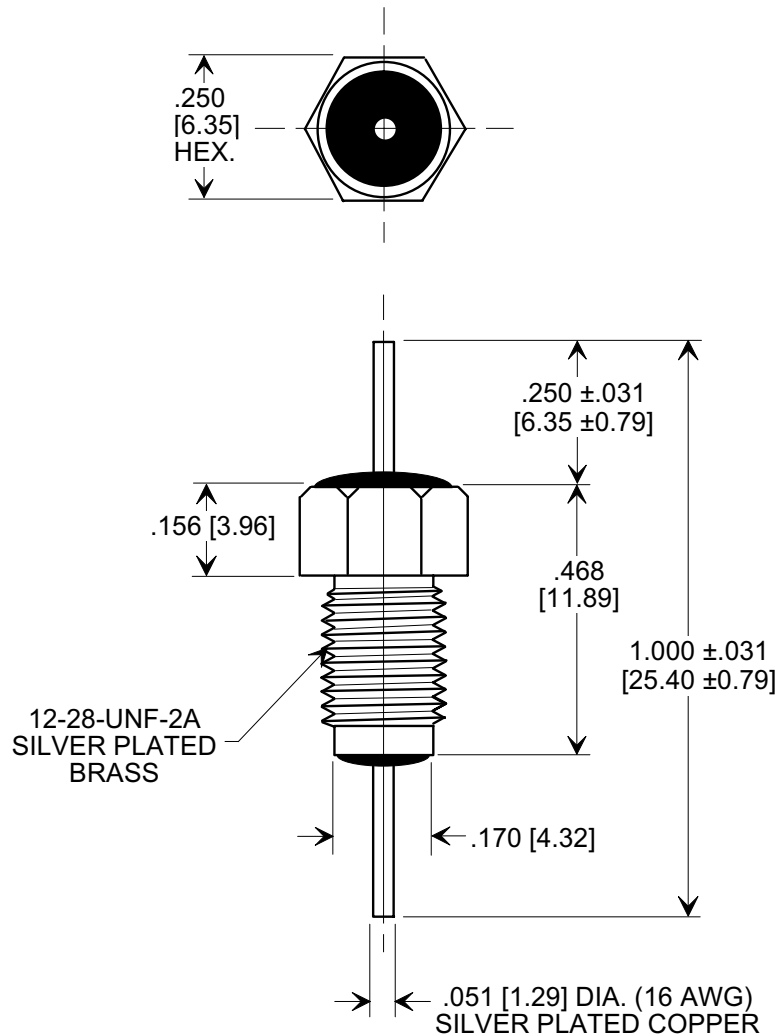



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS

TUSONIX STYLE.	2499-003
Capacitance Value:	10,000 pF
Capacitance Tolerance:	+80 / -20%
Temp. Characteristics:	X5W
Rating:	500 WVDC @ 85 °C
Current (A):	20
IR Min @ 100 vdc	10 GΩ
DWV	1500 VDC
Operating Range:	-55° TO +125°C

NOTES:

- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- TUSONIX STANDARD PART
NUMBER: 2499-003-X5W0-103Z.
TUSONIX R.o.H.S. COMPLIANT PART
NUMBER: 2499-003-X5W0-103Z LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON BUSHING HEX FLATS:
STANDARD PART: BLACK MARKING.
RoHS COMPLIANT PART: GREEN MARKING.

X-2015 Rev-0

REVISION RECORD Original Release C.O. 19980528-1-01 DIM'S IN METRIC & NOTE ADDED , SPEC.TABLE REVISED L.E. 01-27-04 20040126-2-01 ADDED NOTES 2 & 3. OPER. RANGE WAS +85°C. S.M. 10-21-05 20050407-1-02		--TOLERANCES-- Unless Otherwise Specified		Title BUSHING TYPE FEED-THRU CAPACITOR		
		DECIMAL ± .015 [0.38]				
		ANGLES ± 		Drawn S.M. 05-29-98		Scale 3 x
		TUSONIX TUCSON, ARIZONA		Approved S.C. 05-29-98		
				A	2499-003-X5W0-103Z	