


## 1030D, 1031D, 1033D and 1090D Series Non-Relampable Neon-Incandescent Indicator Lights

### Description and Features

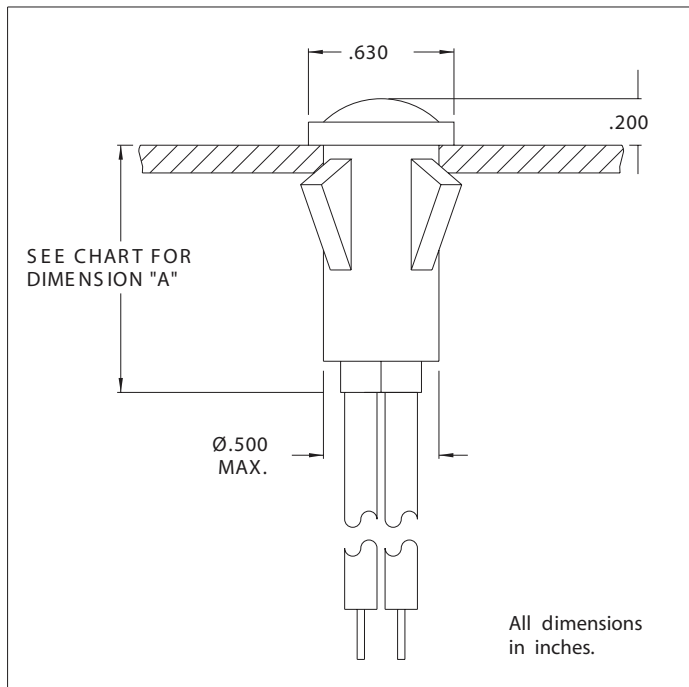

Mounting: Will snap-fit into Ø.500/.505 hole in panels  
.020/.100 thick. Push-on speednut SN0461  
also available. Mounting hole pattern on page SP2.

Wire Leads: No. 22 AWG (105°C) 4.40/4.80 long,  
stripped .430/.570

Lens: Polycarbonate

Bezel: Polished stainless steel.

Housing: White Nylon

| Lens Color | Neon                      |                           | Incandescent       |                    |
|------------|---------------------------|---------------------------|--------------------|--------------------|
|            | Model No.<br>(105-125VAC) | Model No.<br>(208-250VAC) | Model No.<br>(12V) | Model No.<br>(28V) |
| Red        | 1030D1                    | 1031D1                    | 1090D1-12V         | 1090D1-28V         |
| Amber      | 1030D3                    | 1031D3                    | 1090D3-12V         | 1090D3-28V         |
| White      | 1030D4                    | 1031D4                    | -                  | 1090D4-28V         |
| Green      | 1032D5*                   | 1033D5*                   | 1090D5-12V         | 1090D5-28V         |
| Lamp used  | C 2A+R resistor           |                           | #2162              | #2187              |
| Lead Color | Black                     | One Black/One Red         | Yellow             | Purple             |
| "A"        | 1.130                     | 1.130                     | .910               | .910               |

\* Incorporates G2B lamp and resistor.  
Underwriters Laboratories (UL) File No. E20356

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[1090D4-28V](#) [1090D5-12V](#) [1032D5](#) [1031D3](#) [1031D1](#) [1030D3](#) [1030D1](#) [1030D4](#) [1033D5](#) [1090D1-12V](#) [1090D1-28V](#) [1090D3-12V](#) [1090D3-28V](#) [1090D5-28V](#) [1031D4](#)