


Extenders

Bus Extenders

Multibus

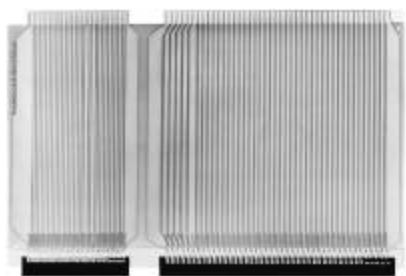


3690-18

Length:
Height:
Connector:

Current Rating:
Voltage Rating:
Material:

7.5" (190.5mm)
12" (304.8mm)
Gold-plated. Mounted on top and connected to circuit traces
5 amps at 10° F. rise
200 RMS or 300 VDC
FR4 Epoxy Glass, 2 oz. Cu.

IBM AT - ISA

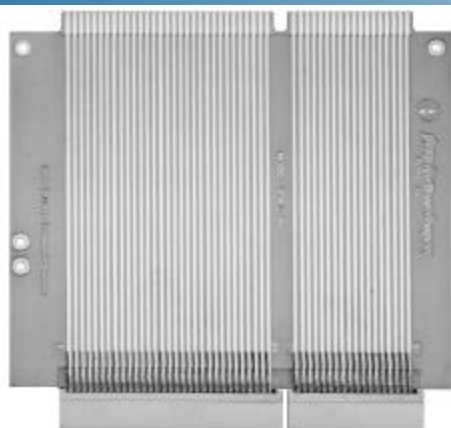


3690-26

Length:
Contacts:
Test Points:
Current Rating:
Voltage Rating:
Material:

IBM AT

5.6"
98 @ .1" Ctrs, Ni/Gold
On each connector line
5 amps at 10° F. rise
200 RMS or 300 VDC
FR4 Epoxy Glass, 2 oz. Cu.

IBM PC, XT

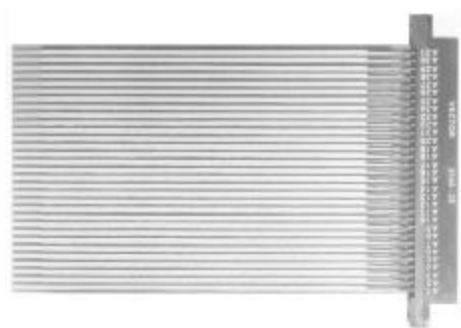

3690-22


Length:
Contacts:
Test Points:
Current Rating:
Voltage Rating:
Material:

IBM PC, XT

5.7"
62 @ .1" Ctrs, Ni/Gold
On each connector line
5 amps at 10° F. rise
200 RMS or 300 VDC
FR4 Epoxy Glass, 2 oz. Cu.

Vectorboard

PCMCIA

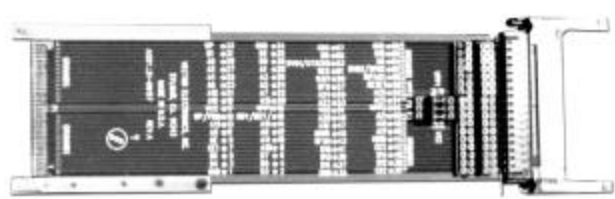

3690-35

- Fully Assembled
- Marked Legends
- Test points on all lines: Dual row headers on .100" centers
- Jumper connected power/gnd
- For Type II or Type III slots
- 68 pin connector

PCMCIA Extender Board