


Solid Tantalum Chip Capacitors TANTAMOUNT®, Conformal Coated



FEATURES

- Pad compatible with 194D and MIL-C-556365/4 (CWR06)
- 8 mm, 12 mm 16 mm Tape to EIA-481-2 and reeling per IEC 286-3. 7" [178 mm] standard 13" [330 mm] available.
- Terminations: Tin (2) standard


RoHS*
COMPLIANT

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)

Note: Refer to Doc. 40088

Capacitance Range: 0.1 µF to 270 µF

Capacitance Tolerance: ± 10 %, ± 20 % standard


Voltage Rating: 4 WVDC to 50 WVDC

ORDERING INFORMATION

695D	475	X0	004	A	2	T
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	CASE CODE	TERMINATION	PACKAGING
This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.		X0 = ± 20 % X9 = ± 10 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating.	See Ratings and Case Codes Table	2 = 100 % Tin 4 = Gold Plated 8 = Solder Plated (60/40) Special Order	T = Tape and Reel 7" [178 mm] Reel W = 13" [330 mm] Reel (1/2 reel minimum) See Tape and Reel Specifications

Note: Preferred Tolerance and reel sizes are in bold.
We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size.
Voltage substitutions will be marked with the higher voltage rating.

DIMENSIONS in inches [millimeters]

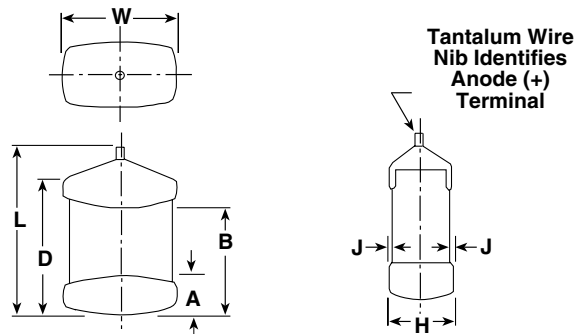

CASE CODE	L (MAX.)	D (REF.)	W	H	A	B	J (MAX.)
A	0.135 [3.4]	0.100 [2.54]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.023 ± 0.010 [0.584 ± 0.25]	0.067 ± 0.015 [1.70 ± 0.38]	0.004 [0.10]
B	0.185 [4.7]	0.150 [3.81]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.040 ± 0.015 [1.02 ± 0.38]	0.120 ± 0.015 [3.05 ± 0.38]	0.004 [0.10]
D	0.185 [4.7]	0.140 [3.56]	0.095 ± 0.015 [2.41 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.040 ± 0.015 [1.02 ± 0.38]	0.110 ± 0.020 [2.79 ± 0.51]	0.004 [0.10]
E	0.235 [6.0]	0.200 [5.08]	0.095 ± 0.015 [2.41 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.040 ± 0.015 [1.02 ± 0.38]	0.170 ± 0.020 [4.32 ± 0.51]	0.004 [0.10]
F	0.255 [6.5]	0.220 [5.59]	0.135 ± 0.015 [3.43 ± 0.38]	0.070 ± 0.015 [1.78 ± 0.38]	0.040 ± 0.015 [1.02 ± 0.38]	0.185 ± 0.020 [4.70 ± 0.51]	0.004 [0.10]
G	0.300 [7.6]	0.260 [6.60]	0.100 ± 0.015 [2.54 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.040 ± 0.015 [1.02 ± 0.38]	0.220 ± 0.020 [5.59 ± 0.51]	0.004 [0.10]
H	0.303 [7.7]	0.265 [6.73]	0.150 ± 0.015 [3.81 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.220 ± 0.020 [5.59 ± 0.51]	0.004 [0.10]

Note: The anode termination (D less B) will be a minimum of 0.010" (0.3 mm). T Case = 0.005 (0.13 mm) minimum.

* Pb containing terminations are not RoHS compliant, exemptions may apply

RATINGS AND CASE CODES

µF	4 V	6 V	10 V	15 V	20 V	25 V	35 V	50 V
0.10								A
0.15								A
0.22							A	B
0.33							A	B
0.47						A	B	D
0.68						A	B	D
1.0					A	B	D	D
1.5				A	B	D	D	E
2.2				A	B	D	E	F
3.3			A	B	D	D	F	F
4.7	A	A	B	D	D	E	F	G
6.8	B	B	D	D	E	F	F	H
10	B	D	D	D	F	F	G	H
15	D	D	D	E	F	G	H	
22	D	D	E	F	G	H		
33	E	E	F	F	G	H		
47	F	F	F	G	H			
68	F	F	G	H				
100	F	G	G	H				
120	G	G	H					
150	G	H	H					
180	H	H						
220	H	H						
270	H							

STANDARD/EXTENDED RATINGS

CAPACITANCE (µF)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (µA)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ohms)	MAX. RIPPLE 100 kHz I _{rms} (Amps)
4 WVDC AT + 85 °C, SURGE = 5.2 V . . . 2.7 WVDC AT + 125 °C, SURGE = 3.4 V						
4.7	A	695D475X_004A2T	0.5	6	11	0.07
6.8	B	695D685X_004B2T	0.5	6	9.0	0.09
10	B	695D106X_004B2T	0.5	6	8.5	0.09
15	D	695D156X_004D2T	0.6	6	2.2	0.20
22	D	695D226X_004D2T	0.9	6	2	0.21
33	E	695D336X_004E2T	1.3	6	1.5	0.25
47	F	695D476X_004F2T	1.9	6	1.0	0.33
68	F	695D686X_004F2T	2.7	6	0.9	0.35
100	F	695D107X_004F2T	4.0	8	0.9	0.35
120	G	695D127X_004G2T	4.8	8	0.7	0.41
150	G	695D157X_004G2T	6.0	8	0.65	0.43
180	H	695D187X_004H2T	7.2	8	0.40	0.61
220	H	695D227X_004H2T	8.8	8	0.35	0.65
270	H	695D277X_004H2T	10.8	8	0.35	0.65
6 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V						
4.7	A	695D475X_006A2T	0.5	6	11	0.07
6.8	B	695D685X_006B2T	0.5	6	9.0	0.07

* For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".

Solid Tantalum Chip Capacitors
TANTAMOUNT® Conformal Coated

Vishay Sprague

STANDARD/EXTENDED RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ohms)	MAX. RIPPLE 100 kHz I _{rms} (Amps)
6 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V						
10	D	695D106X_006D2T	0.6	6	8.5	0.1
15	D	695D156X_006D2T	0.9	6	2.2	0.2
22	D	695D226X_006D2T	1.3	6	2.0	0.32
33	E	695D336X_006E2T	2.0	6	1.5	0.25
47	F	695D476X_006F2T	2.8	6	1.0	0.33
68	F	695D686X_006F2T	4.1	6	0.9	0.35
100	G	695D107X_006G2T	6.0	8	0.9	0.37
120	G	695D127X_006G2T	7.2	8	0.7	0.41
150	H	695D157X_006H2T	9.0	8	0.65	0.48
180	H	695D187X_006H2T	10.8	8	0.40	0.61
220	H	695D227X_006H2T	13.2	8	0.35	0.65
10 WVDC AT + 85 °C, SURGE = 13 V . . . 7 WVDC AT + 125 °C, SURGE = 8 V						
3.3	A	695D335X_010A2T	0.5	6	11.5	0.07
4.7	B	695D475X_010B2T	0.5	6	10.6	0.08
6.8	D	695D685X_010D2T	0.7	6	2.6	0.18
10	D	695D106X_010D2T	1.0	6	2.5	0.18
15	D	695D156X_010D2T	1.5	6	2.2	0.20
22	E	695D226X_010E2T	2.2	6	2.0	0.22
33	F	695D336X_010F2T	3.3	6	1.2	0.30
47	F	695D476X_010F2T	4.7	6	1.0	0.33
68	G	695D686X_010G2T	6.8	6	0.75	0.40
100	G	695D107X_010G2T	10	8	0.75	0.40
120	H	695D127X_010H2T	12	8	0.45	0.58
150	H	695D157X_010H2T	15	8	0.40	0.61
15 WVDC AT + 85 °C, SURGE = 20 V . . . 10 WVDC AT + 125 °C, SURGE = 12 V						
1.5	A	695D155X_015A2T	0.5	6	14	0.07
2.2	A	695D225X_015A2T	0.5	6	12	0.07
3.3	B	695D335X_015B2T	0.5	6	10.8	0.08
4.7	D	695D475X_015D2T	0.7	6	2.8	0.17
6.8	D	695D685X_015D2T	1	6	2.6	0.18
10	D	695D106X_015D2T	1.5	6	2.5	0.18
15	E	695D156X_015E2T	2.3	6	2.3	0.20
22	F	695D226X_015F2T	3.3	6	1.4	0.28
33	F	695D336X_015F2T	5	6	1.2	0.30
47	G	695D476X_015G2T	7.1	6	0.8	0.39
68	H	695D686X_015H2T	10.2	6	0.5	0.55
100	H	695D107X_015H2T	15	8	0.45	0.58
20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V						
1.0	A	695D105X_020A2T	0.5	4	15	0.06
1.5	B	695D155X_020B2T	0.5	6	12	0.08
2.2	B	695D225X_020B2T	0.5	6	11	0.08
3.3	D	695D335X_020D2T	0.7	6	3.0	0.17








* For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".

STANDARD/EXTENDED RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ohms)	MAX. RIPPLE 100 kHz I _{rms} (Amps)
20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V						
4.7	D	695D475X_020D2T	0.9	6	2.8	0.17
6.8	E	695D685X_020E2T	1.4	6	2.55	0.19
10	F	695D106X_020F2T	2.0	6	1.8	0.25
15	F	695D156X_020F2T	3.0	6	1.5	0.27
22	G	695D226X_020G2T	4.4	6	0.9	0.37
33	G	695D336X_020G2T	6.6	6	0.8	0.39
47	H	695D476X_020H2T	9.4	6	0.5	0.55
25 WVDC AT + 85 °C, SURGE = 32 V . . . 17 WVDC AT + 125 °C, SURGE = 20 V						
0.47	A	695D474X_025A2T	0.5	4	17	0.06
0.68	A	695D684X_025A2T	0.5	4	15	0.06
1.0	B	695D105X_025B2T	0.5	4	13	0.08
1.5	D	695D155X_025D2T	0.5	6	4.2	0.14
2.2	D	695D225X_025D2T	0.6	6	3.5	0.16
3.3	D	695D335X_025D2T	0.8	6	3.0	0.17
4.7	E	695D475X_025E2T	1.2	6	2.75	0.19
6.8	F	695D685X_025F2T	1.7	6	2.0	0.23
10	F	695D106X_025F2T	2.5	6	1.8	0.25
15	G	695D156X_025G2T	3.8	6	1.0	0.35
22	H	695D226X_025H2T	5.5	6	0.7	0.46
33	H	695D336X_025H2T	8.3	6	0.8	0.50
35 WVDC AT + 85 °C, SURGE = 46 V . . . 23 WVDC AT + 125 °C, SURGE = 28 V						
0.22	A	695D224X_035A2T	0.5	4	20	0.05
0.33	A	695D334X_035A2T	0.5	4	18	0.06
0.47	B	695D474X_035B2T	0.5	4	15	0.07
0.68	B	695D684X_035B2T	0.5	4	14	0.07
1.0	D	695D105X_035D2T	0.5	4	8.0	0.10
1.5	D	695D155X_035D2T	0.5	6	4.2	0.14
2.2	E	695D225X_035E2T	0.8	6	4.0	0.15
3.3	F	695D335X_035F2T	1.2	6	3.2	0.19
4.7	F	695D475X_035F2T	1.6	6	2.7	0.20
6.8	F	695D685X_035F2T	2.4	6	2.0	0.23
10	G	695D106X_035G2T	3.5	6	1.3	0.30
15	H	695D156X_035H2T	5.3	6	0.8	0.43
50 WVDC AT + 85 °C, SURGE = 65 V . . . 33 WVDC AT + 125 °C, SURGE = 38 V						
0.10	A	695D104X_050A2T	0.5	4	32	0.04
0.15	A	695D154X_050A2T	0.5	4	30	0.04
0.22	B	695D224X_050B2T	0.5	4	18	0.06
0.33	B	695D334X_050B2T	0.5	4	16	0.07
0.47	D	695D474X_050D2T	0.5	4	9.0	0.10
0.68	D	695D684X_050D2T	0.5	4	8.5	0.10
1.0	D	695D105X_050D2T	0.5	4	8.0	0.10
1.5	E	695D155X_050E2T	0.8	6	5.5	0.13
2.2	F	695D225X_050F2T	1.1	6	3.9	0.17
3.3	F	695D335X_050F2T	1.7	6	3.2	0.19
4.7	G	695D475X_050G2T	2.4	6	2.5	0.22
6.8	H	695D685X_050H2T	3.4	6	1.2	0.35
10	H	695D106X_050H2T	5.0	6	1.0	0.39

* Preliminary values, contact factory for availability. For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".



TYPICAL CURVES AT + 25 °C, IMPEDANCE AND ESR VS. FREQUENCY

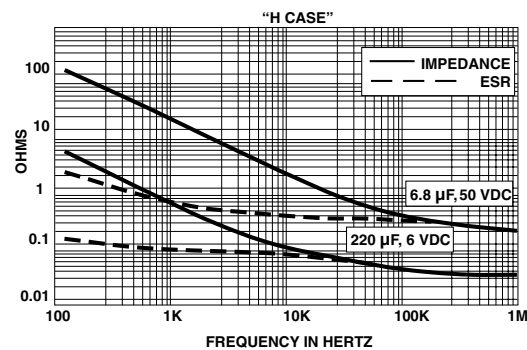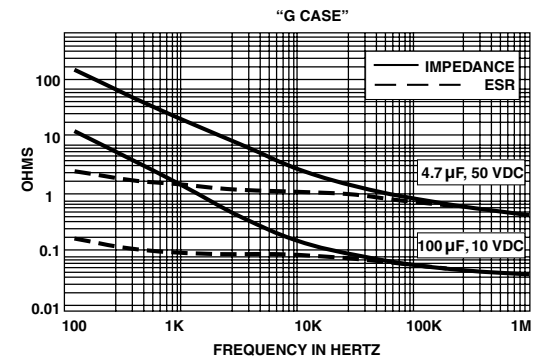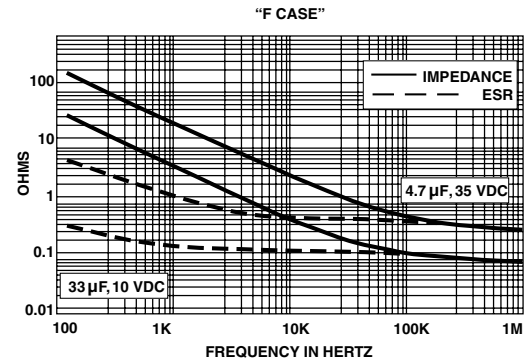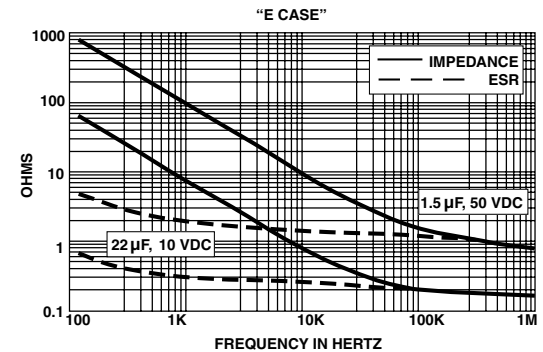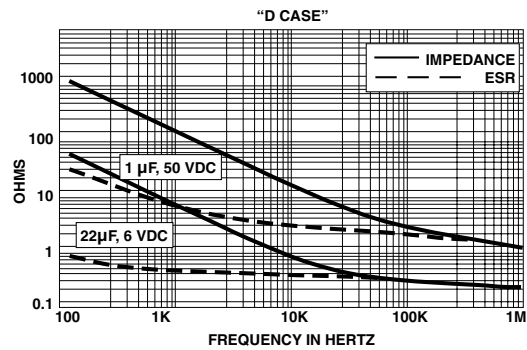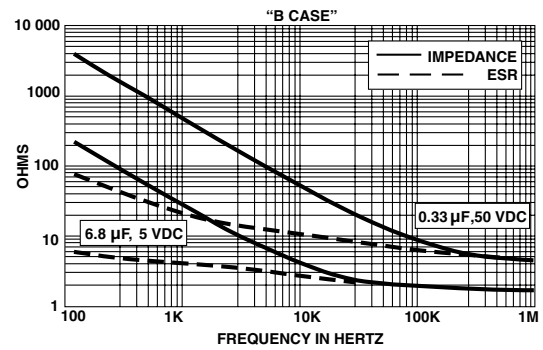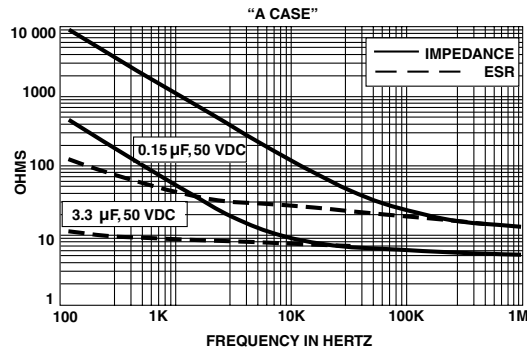



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.