



PC Card (PCMCIA) Interface Switch—12-V Suspend Capability

FEATURES

- Programmable V_{CC} Ramp
- Smart Switching
- 12-V Sleepmode Compatible
- Extremely Low R_{ON}
- Reverse Blocking Switches
- V_{PP} Programmable to 0, 12-V or V_{CC}
- Safe Power-Up
- Low Power Consumption
- PC Card 3-V/5-V Compatible
- Logic Compatible Inputs
- Single SO-16 Package

DESCRIPTION

The Si9712 combines low on-resistance with slow ramp time and smart switching for overall best performance in integrated PC Card interface switches.


The Si9712 operates off the 5-V supply and has built-in level shifting for gate drive. Internal logic protects against an external control input error that would short 5 V to the 3.3-V supply. This protection logic also allows the Si9712 to be configured for positive or negative control logic for compatibility with a variety of PC Card controllers. These control inputs are CMOS logic compatible and can be driven to 3.3 V or 5 V.

The Si9712 complies with the release of the PC Card standard by supplying 0 V, 12 V, and V_{CC} to the V_{PP} output and 0 V, 3.3 V, and 5 V to the V_{CC} output. The V_{CC} ramp time is user programmable with an external capacitor connected to the SR pin.

The PC Card switch is packaged in a narrow body SO-16 package and is rated over the industrial temperature range -40 to 85°C .

The Si9712 is available in both standard and lead (Pb)-free packages.

FUNCTIONAL BLOCK DIAGRAM

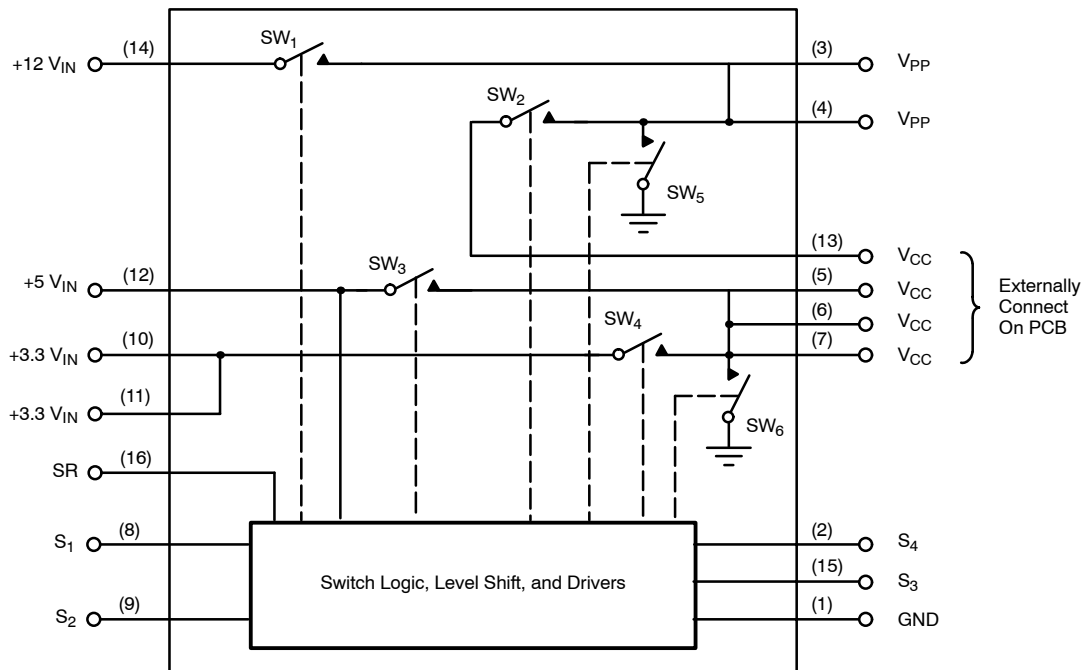

ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to Ground

+12 V _{IN}	15 V
+5 V _{IN}	7 V
+3.3 V _{IN} ^c	7 V
S ₁ through S ₄ (CMOS Inputs)	7 V
I _{OUT} V _{PP} ^a	300 mA
All Pins	-0.5 V
I _{OUT} V _{CC} ^b	4 A

PD Max: (T _A = 25°C)	2.5 W
(T _A = 85°C)	1.0 W
Junction Temperature	125°C
Thermal Rating—R _{ΘJA}	40 °C/W

Notes

- Pins 3, 4 connected together externally.
- Pins 5, 6, 7, 13 connected together externally.
- Pins 10, 11 connected together externally.

RECOMMENDED OPERATING CONDITIONS

+12 V _{IN}	0 or 12 V ± 10%
+5 V _{IN} (must be present)	5 V ± 10%
+3.3 V _{IN} ^c	3.3 V ± 10%
C _{SR}	33 nF
I _{OUT} V _{PP} ^a	150 mA
I _{OUT} V _{CC} ^b	2 A

V _{PP} Load Capacitance	10 μF Max
V _{CC} Load Capacitance	150 μF Max

Notes

- Pins 3, 4 connected together externally.
- Pins 5, 6, 7, 13 connected together externally.
- Pins 10, 11 connected together externally.

SPECIFICATIONS

Parameter	Symbol	Test Conditions Unless Otherwise Specified $C_{SR} = 33\text{ nF}$, $+12\text{ V}_{IN} = 12\text{ V}$, $+5\text{ V}_{IN} = 5\text{ V}$ $+3.3\text{ V}_{IN} = 3.3\text{ V}$, Low $\leq 0.8\text{ V}$, High $\geq 2.2\text{ V}$		Limits -40 to 85°C			Unit
				Min ^a	Typ ^b	Max ^a	
Switch 1							
On-Resistance	R_{ON}	$I = 120\text{ mA}$, $+12\text{ V}_{IN} = 11.4\text{ V}$ $S_3 = S_1 = \text{High}$ $S_2 = S_4 = \text{Low}$	$T_A = 25^\circ\text{C}$			120	$\text{m}\Omega$
			$T_A = 85^\circ\text{C}$			145	
Off Current ($+12\text{ V}_{IN}$)	I_{OFF}	$+12\text{ V}_{IN} = 12.6\text{ V}$ $S_1 = \text{Low}$	$T_A = 25^\circ\text{C}$			1	μA
			$T_A = 85^\circ\text{C}$			10	
Switching Time	$t_{SW1(\text{on})}$	$S_2 = S_4 = \text{Low}$, See Figure 1 $S_3 = \text{High}$		50	200	350	μs
	$t_{SW1(\text{off})}$				1.0	10	
Delay Time	$t_{d(\text{on})}$	See Figure 3 $S_2 = S_4 = \text{Low}$		1.0	6	20	ms
	$t_{d(\text{off})}$			0.1	2.9	10	
Rise Time	$t_{SW1(\text{on})}$	$S_2 = S_4 = \text{Low}$, $S_3 = \text{High}$, See Figure 2		50	150	300	μs
Switch 2							
On-Resistance	R_{ON}	$I = 120\text{ mA}$, $S_2 = S_3 = \text{High}$ $S_1 = S_4 = \text{Low}$	$T_A = 25^\circ\text{C}$			150	$\text{m}\Omega$
			$T_A = 85^\circ\text{C}$			180	
Switching Time	$t_{SW2(\text{on})}$	$S_1 = S_4 = \text{Low}$, $S_3 = \text{High}$, See Figure 1		50	200	350	μs
	$t_{SW2(\text{off})}$				1.0	10	
Delay Time	$t_{d(\text{on})}$	$S_1 = S_4 = \text{Low}$, See Figure 3		1.0	6	20	ms
	$t_{d(\text{off})}$			0.1	1.7	10	
Rise Time	$t_{SW2(\text{on})}$	$S_1 = S_4 = \text{Low}$, $S_3 = \text{High}$, See Figure 2		50	150	300	μs
Switch 3							
On-Resistance	R_{ON}	$I = 500\text{ mA}$, $S_3 = \text{High}$ $S_1 = S_2 = S_4 = \text{Low}$	$T_A = 25^\circ\text{C}$			70	$\text{m}\Omega$
			$T_A = 85^\circ\text{C}$			95	
Off Current (V_{CC})	I_{OFF}	$+5\text{ V}_{IN} = 5.5\text{ V}$, $V_{CC} = 0\text{ V}$ $S_1 = S_2 = S_3 = \text{Low}$ $S_4 = \text{High}$ $+3.3\text{ V}_{IN} = \text{Open Circuit}$	$T_A = 25^\circ\text{C}$			1	μA
			$T_A = 85^\circ\text{C}$			10	
Rise Time	$t_{SW3(\text{on})}$	$S_1 = S_2 = S_4 = \text{Low}$, See Figure 2		0.1	1.7	10	ms
Fall Time	$t_{SW3(\text{off})}$			3	30	50	



SPECIFICATIONS							
Parameter	Symbol	Test Conditions Unless Otherwise Specified $C_{SR} = 33 \text{ nF}$, $+12 \text{ V}_{IN} = 12 \text{ V}$, $+5 \text{ V}_{IN} = 5 \text{ V}$ $+3.3 \text{ V}_{IN} = 3.3 \text{ V}$, Low $\leq 0.8 \text{ V}$, High $\geq 2.2 \text{ V}$		Limits −40 to 85°C			Unit
				Min ^a	Typ ^b	Max ^a	
Switch 4							
On-Resistance	R_{ON}	$I = 500 \text{ mA}$, $S_4 = \text{High}$ $S_1 = S_2 = S_3 = \text{Low}$	$T_A = 25^\circ\text{C}$			50	$\text{m}\Omega$
			$T_A = 85^\circ\text{C}$			70	
Off Current ($+3.3 \text{ V}_{IN}$)	I_{OFF}	$+3.3 \text{ V}_{IN} = 3.6 \text{ V}$, $S_1 = S_2 = S_3 = S_4 = \text{Low}$	$T_A = 25^\circ\text{C}$			1	μA
			$T_A = 85^\circ\text{C}$			10	
Rise Time	$t_{SW4(\text{on})}$	$S_1 = S_2 = S_3 = \text{Low}$, See Figure 2		0.1	0.9	10	ms
Fall Time	$t_{SW4(\text{off})}$			3	20	40	
Switch 5							
On-Resistance	R_{ON}	$I = 2 \text{ mA}$, $S_1 = S_2 = \text{Low}$	$T_A = 25^\circ\text{C}$		235	400	Ω
			$T_A = 85^\circ\text{C}$		325	550	
Switch 6							
On-Resistance	R_{ON}	$I = 2 \text{ mA}$, $S_3 = S_4 = \text{Low}$	$T_A = 25^\circ\text{C}$		140	400	Ω
			$T_A = 85^\circ\text{C}$		200	500	
Power Supply							
$+5 \text{ V}_{IN}$ Current Input (on)	$I_{+5VIN(1)}$	$S_1 = S_4 = 0 \text{ V}$, $S_2 = S_3 = 3 \text{ V}$			20	50	μA
	$I_{+5VIN(2)}$	$S_1 = S_4 = 3 \text{ V}$, $S_2 = S_3 = 0 \text{ V}$			20	50	
$+5 \text{ V}_{IN}$ Current Input (off)	$I_{+5VIN(3)}$	$S_1 = S_2 = S_3 = S_4 = 0 \text{ V}$			<1	10	
Switch Control Inputs							
Input Voltage High	$V_{I(H)}$	$+5 \text{ V}_{IN} = 5.5 \text{ V}$		2.2	1.8		V
		$+5 \text{ V}_{IN} = 4.5 \text{ V}$		2.2	1.6		
Input Voltage Low	$V_{I(L)}$	$+5 \text{ V}_{IN} = 5.5 \text{ V}$			1.6	0.8	
		$+5 \text{ V}_{IN} = 4.5 \text{ V}$			1.4	0.8	
Input Current High	$I_{I(H)}$	S_1 through $S_4 = 5 \text{ V}$				1.0	μA
Input Current Low	$I_{I(L)}$	S_1 through $S_4 = \text{GND}$		−1.0			

Notes

- a. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum.
b. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

TIMING WAVEFORMS




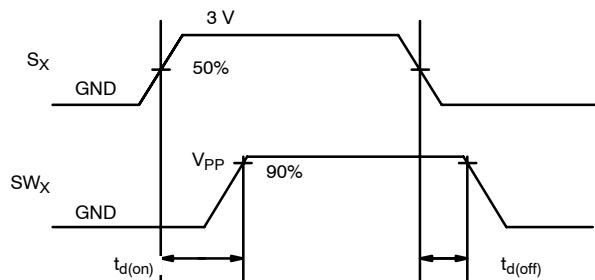
FIGURE 1. V_{PP} Switch Delay

FIGURE 2. Switch Ramp

FIGURE 3. Delay from S_1 or S_2 to V_{PP} Power-up

PIN CONFIGURATION AND DESCRIPTION

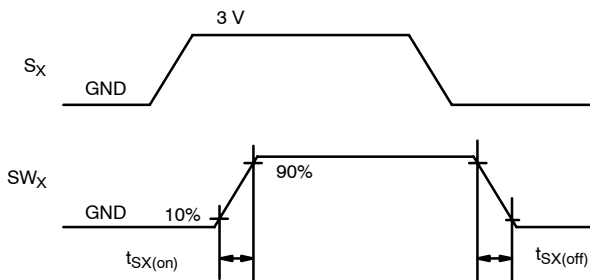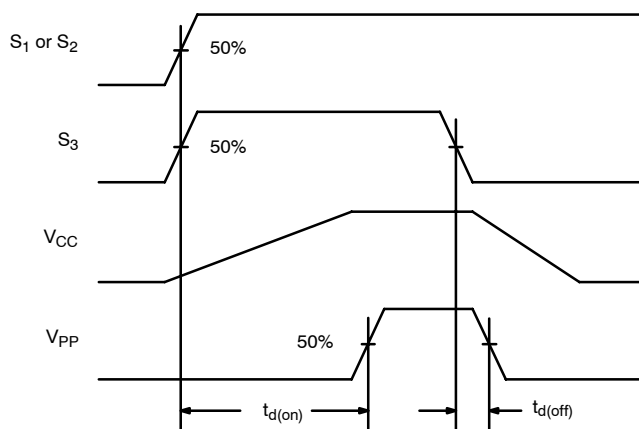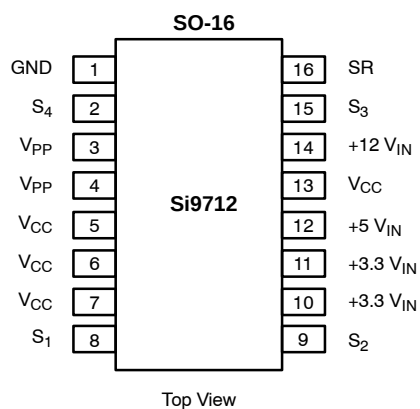

Note: Pins 5, 6, 7, and 13 must be connected in the PCB for correct operation.

Pin Number	Function	Description
1.	GND	Ground connection.
2	S_4	Control input for selecting +3.3 V_{IN} to V_{CC} . The PC Card terminology for this pin is V_{CC_EN0} .
3, 4	V_{PP}	Program and peripheral voltage to PC Card slot.
5, 6, 7, 13	V_{CC}	Supply voltage to slot.
8	S_1	Control input for selecting +12 V_{IN} to V_{PP} . The PC Card terminology for this pin is V_{PP_EN1} .
9	S_2	Control input for selecting V_{CC} to V_{PP} . The PC Card terminology for this pin is V_{PP_EN0} .
10, 11	+3.3 V_{IN}	+3.3-V supply.
12	+5 V_{IN}	+5-V supply.
14	+12 V_{IN}	+12-V supply.
15	S_3	Control input for selecting +5 V_{IN} to V_{CC} . The PC Card terminology for this pin is V_{CC_EN1} .
16	SR	Slew rate control pin, capacitor to GND defines programmable ramp time.



ORDERING INFORMATION

Part Number	Temperature Range	Package
Si9712DY	-40 to 85°C	SOIC-16
Si9712DY-T1		
Si9712DY-T1—E3		

TRUTH TABLE^b

S ₁	S ₂	S ₃	S ₄	Switch 1 ^a	Switch 2 ^a	Switch 3	Switch 4	Switch 5	Switch 6
0	0	0	0	Off	Off	Off	Off	On	On
0	0	0	1	Off	Off	Off	On	On	Off
0	0	1	0	Off	Off	On	Off	On	Off
0	0	1	1	Off	Off	Off	Off	On	On
0	1	0	0	Off	Off	Off	Off	On	On
0	1	0	1	Off	On	Off	On	Off	Off
0	1	1	0	Off	On	On	Off	Off	Off
0	1	1	1	Off	Off	Off	Off	On	On
1	0	0	0	Off	Off	Off	Off	On	On
1	0	0	1	On	Off	Off	On	Off	Off
1	0	1	0	On	Off	On	Off	Off	Off
1	0	1	1	Off	Off	Off	Off	On	On
1	1	0	0	Off	Off	Off	Off	On	On
1	1	0	1	On	Off	Off	On	Off	Off
1	1	1	0	On	Off	On	Off	Off	Off
1	1	1	1	Off	Off	Off	Off	On	On

Notes

- a. Turn on of switch 1 and 2 are internally delayed until after V_{CC} is valid. See Figure 3.
b. Shaded lines are error conditions for PC Card applications, however, switches default to the states shown.

TIMING DIAGRAM

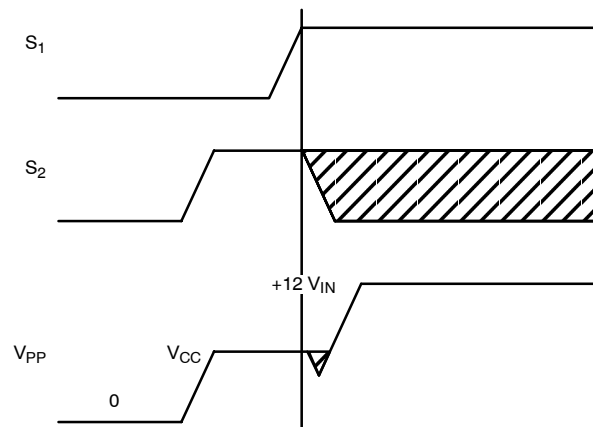
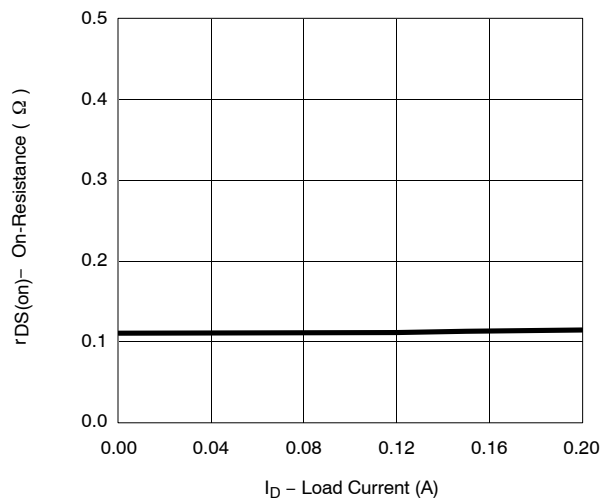
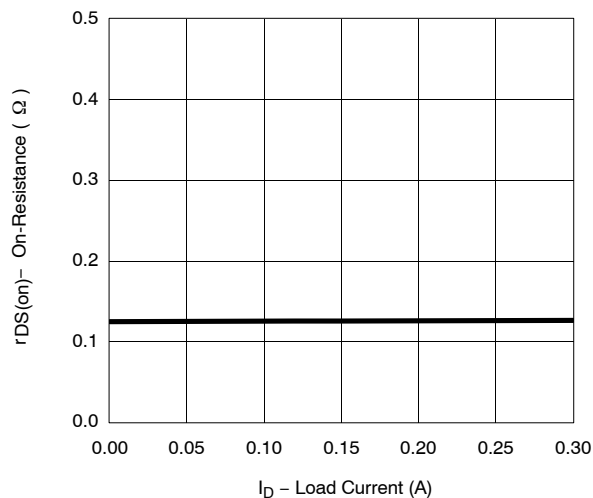
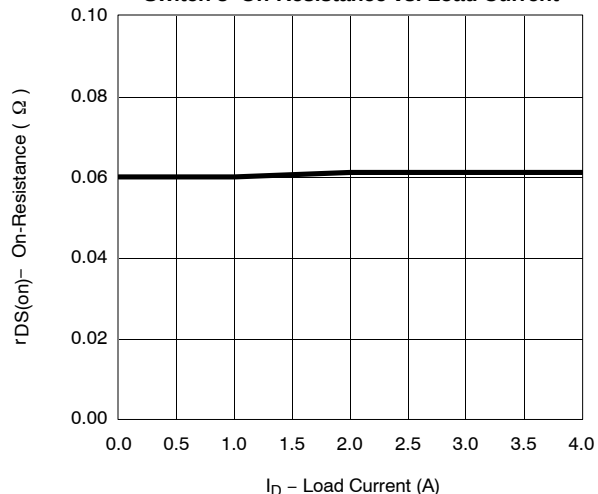
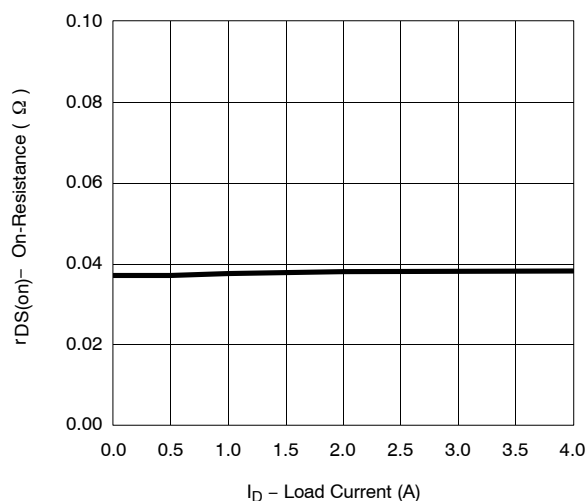
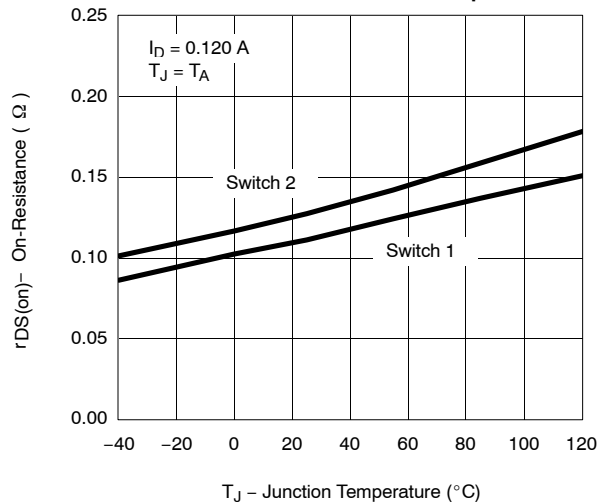
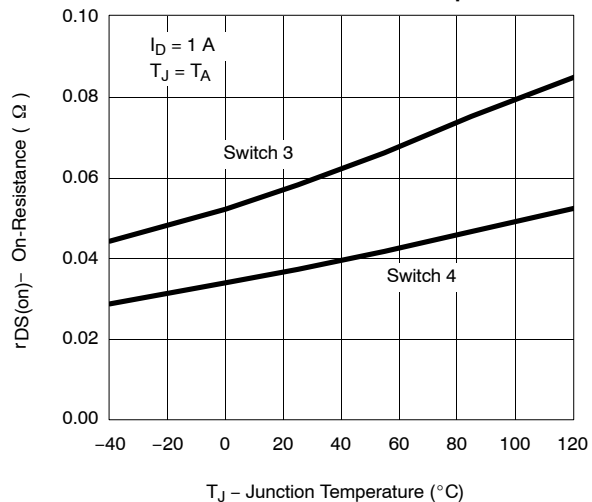
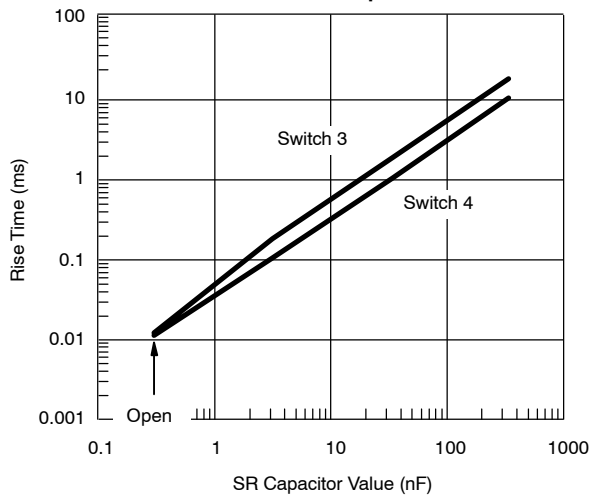


FIGURE 4. Break-Before-Make of SW₁ and SW₂






TYPICAL CHARACTERISTICS (25 °C UNLESS OTHERWISE NOTED)
Switch 1–On-Resistance vs. Load Current

Switch 2–On-Resistance vs. Load Current

Switch 3–On-Resistance vs. Load Current

Switch 4–On-Resistance vs. Load Current

On-Resistance vs. Junction Temperature

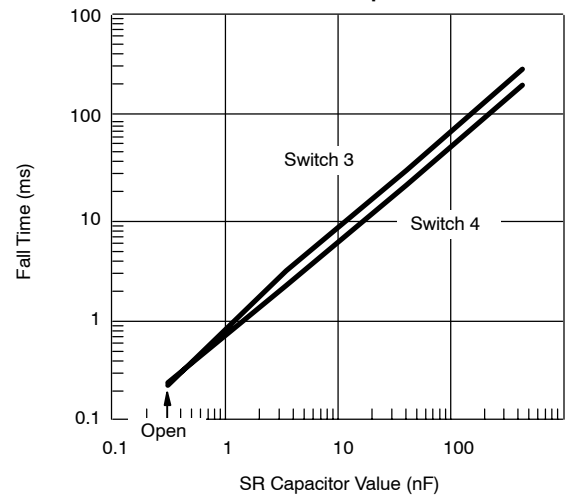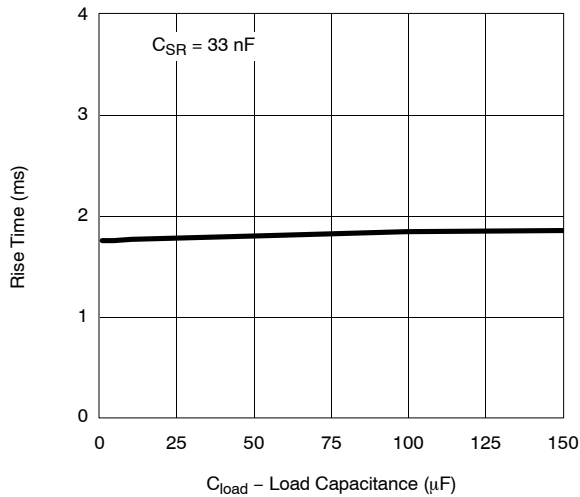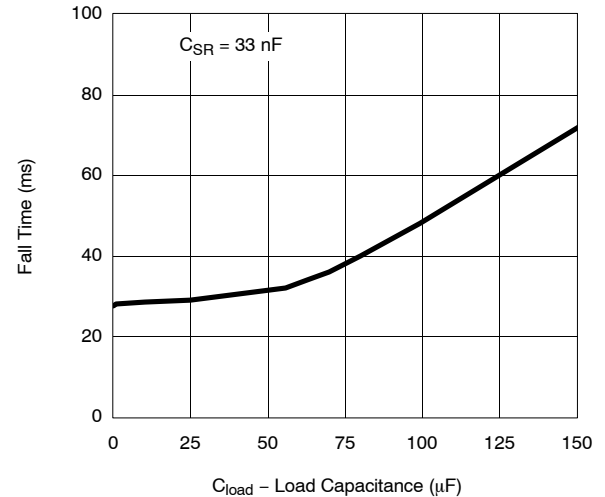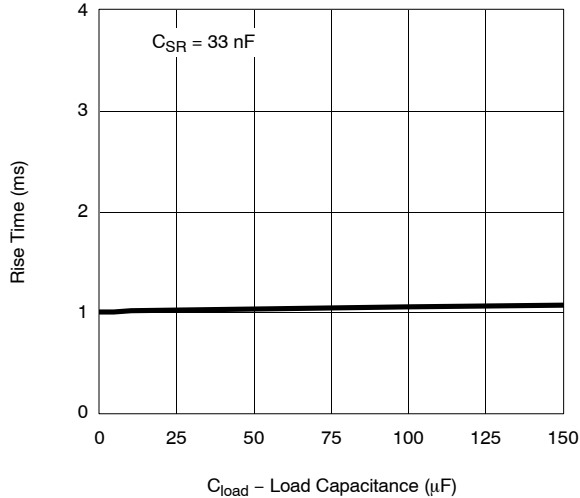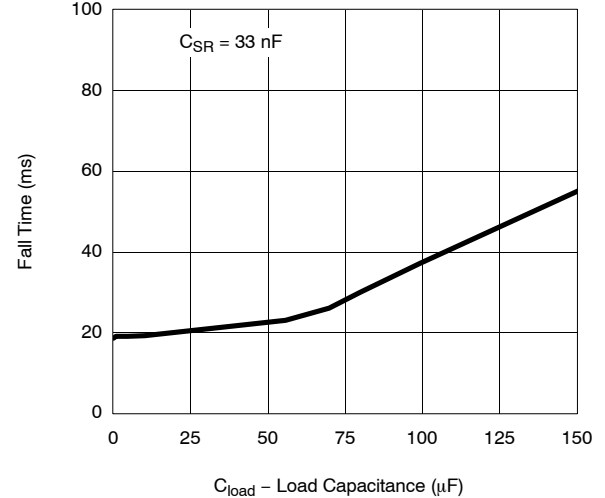On-Resistance vs. Junction Temperature


**TYPICAL CHARACTERISTICS (25°C UNLESS OTHERWISE NOTED)**

Rise Time vs. SR Capacitor Value



Fall Time vs. SR Capacitor Value

Switch 3
Rise Time vs. Load CapacitanceSwitch 3
Fall Time vs. Load CapacitanceSwitch 4
Rise Time vs. Load CapacitanceSwitch 4
Fall Time vs. Load Capacitance



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.