

## KNC Series Datasheet

Power Shunt Resistor | Axial | Low Inductance and Low Ohmic | Ceramic case

### ORDERING CODE-Example

New SAP Part Nr.:

KNC	600	J	B	-	AX-	OR056	AA
Serie	Power rating	Tol.	Pack-Code	TCR	Forming type	R Value	Special
		F = ±1% G = ±2% H = ±3% J = ±5%	B = Bulk R = Tape Reel	- Base on spec.	AX- = Axial 73- Inner Taping dimension or 83- Inner Taping dimension		AA = Standard

Historical VTM Part Nr.:

KN351 - 8	5	B	OR056
Type	Tol.	Pack-Code	R Value

### APPLICATIONS

- Automotive
- Charger
- Alternative Energy
- Power Supply
- Home Appliances
- Industrial


### FEATURES

- All welded construction
- Very low inductance
- High power to size ratio
- Good overload and heat dissipation capability
- Bending options available
- RoHS & REACH Compliant

### ELECTRICAL SPECIFICATIONS

Type		KNC500	KNC600	KNC800	KNC900	KNC10A	
Historical Part Number		KN350 - 8	KN351 - 8	KN352 - 8	KN353 - 8	KN354 - 8	
Nominal Power Rating P <sub>70</sub>	[W]	See next page					
Resistance Range (Other values upon request)	[Ω]	Min.	OR003	OR004	OR005	OR004	OR005
		Max.	OR051	OR068	OR1	OR068	OR1
E-Series (preferred)		E24 >OR01 (Other upon request)					
Tolerances	±[%]	F = 1% ; G = 2% ; H = 3% ; J = 5%					
Temperature Coefficient	±[10 <sup>-6</sup> K <sup>-1</sup> ]	+200 ... +1200 (Depends on value)					
Working Temperature Range	[°C]	-55 ... +250					
Thermal Resistance	[kW <sup>-1</sup> ]	65	50	38	20	18	
Insulation Resistance IEC60115-1 clause 4.6	[MΩ]	> 10 <sup>4</sup>					
Max. Working Voltage	[V] <sub>RMS</sub>	$\sqrt{P_{70} \times R}$					
Dielectric Withstanding Voltage IEC60115-1 clause 4.7 (1[min])	[V] <sub>RMS</sub>	2000					

### DIMENSIONS [mm]

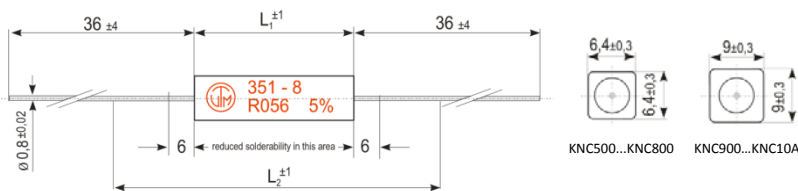

Measuring length L<sub>2</sub>: Resistance value is measured over the centered length L<sub>2</sub> on terminals free of oxide and contaminations. Differing conditions require adequate corrections (R<sub>terminal</sub> = 0,4 mΩ/cm).

New P/Nr. Type	Historical P/N:	L <sub>1</sub>	L <sub>2</sub>
KNC500	KN350 - 8	18 ±1,0	40
KNC600	KN351 - 8	25 ±1,0	45
KNC800	KN352 - 8	38 ±1,0	60
KNC900	KN353 - 8	25 ±1,0	45
KNC10A	KN354 - 8	38 ±1,0	60

# KNC Series Datasheet

## PERFORMANCE DATA

Type		KNC500	KNC600	KNC800	KNC900	KNC10A
Historical Part Number		KN350 - 8	KN351 - 8	KN352 - 8	KN353 - 8	KN354 - 8
Derating Linear	[°C]	70...250 (0W)				
Climatic Category		55/200/56				
Failure Rate <i>(Total, <math>\vartheta</math>, max, 60[%] cont. lev.)</i>	[ $10^{-9}$ h <sup>-1</sup> ]	appr. 10 depends on value				
Endurance <i>IEC60115-1 clause 4.25 (<math>P_{70}</math>, @ 70[°C], 1000[h])</i>	±[%]	3				
Damp Heat, Steady State <i>IEC60115-1 clause 4.24 (40[°C], 93[% r.h.], 56[d])</i>	±[%]	0,5				
Climatic Sequence <i>IEC60115-1 clause 4.23</i>	±[%]	0,5				
Resistance to Soldering Heat <i>IEC60115-1 clause 4.18 (260<sup>±5</sup>[°C], 3,5<sup>±1</sup>[s])</i>	±[%]	0,2				
Terminal Strength	±[%]	0,5				
Terminal Tensile Strength	[N]	≥ 25				
Solderability <i>IEC60068-2-20 (245<sup>±5</sup>[°C] 3<sup>±0,5</sup>[s])</i>		Solder bath method (> 95% coverage)				
Marking <i>IEC60062</i>		Printed in clear				



## ELECTRICAL PERFORMANCE

Nominal Power Rating [W]			
New P/Nr. Type	Historical P/Nr:	Resistance Value	Rated Power [W] P <sub>70°C</sub>
KNC450	KN350 - 8	OR003	4,5
KNC500		OR004 ... OR051	5,0
KNC600	KN351 - 8	OR004 ... OR068	6,0
KNC800	KN352 - 8	OR005 ... OR1	8,0
KNC900	KN353 - 8	OR004 ... OR068	9,0
KNC10A	KN354 - 8	OR005 ... OR1	10,0

## KNC Series Datasheet

### PACKAGING

The standard packaging for KNC in axial type is bulk, dimensions below.

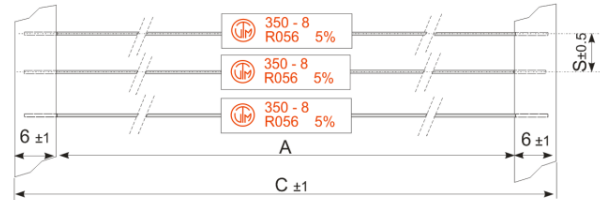

New P/Nr. Type	Historical P/N:	Pack Code	Pieces	Forming Type
KNC500	KN350 - 8	B = Bulk	200	AX - Axial
KNC600	KN351 - 8		200	
KNC800	KN352 - 8		200	
KNC900	KN353 - 8		200	
KNC10A	KN354 - 8		200	

New P/Nr. Type	Historical P/N:	Pack Code	Pieces	Forming Type (Inner Taping dim.)	A	C	S
KNC500	KN350 - 8	R = Taped in Reel	1000	73- or 83-	73	85	10
KNC600	KN351 - 8		1000		83	95	10
KNC800	KN352 - 8		1000		83	95	10
KNC900	KN353 - 8		500		83	95	10
KNC10A	KN354 - 8		500		83	95	10

### ALTERNATIVE LEAD CONFIGURATIONS

This type KNC is also available in a different pre-forming, as shown below, other's upon request.

#### THROUGH HOLE VERSION

Axial Goal Post (AG-)	Axial Goal Post Kink (AK-)	Radial (RD-)	Radial 2 Kink (RK-)

For horizontal and vertical pre-forming please consult your local sales contact.