

## Data sheet | Item number: 787-1611

Switched-mode power supply; Classic; 1-phase; 12 VDC output voltage; 4 A output current; NEC Class 2; DC OK signal



[www.wago.com/787-1611](http://www.wago.com/787-1611)



Similar to picture

RoHS  
Compliant

BOMcheck.net

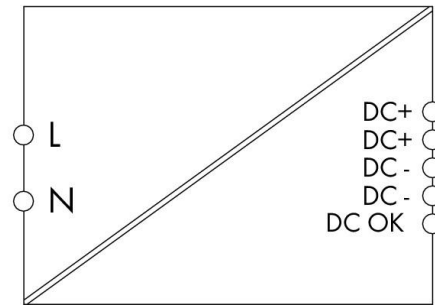

### Item description

#### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Limited Power Source (LPS) per NEC Class 2
- Bounce-free switching signal (DC OK)
- Suitable for both parallel and series operation

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204
- GL approval, also suitable for EMC 1 in conjunction with 787-980 Filter Module

## Data

### Technical data

#### Input

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| Phases                                   | 1                                                |
| Nominal input voltage $U_{i\text{ nom}}$ | 1 x AC 100 ... 240 V                             |
| Input voltage range                      | AC 85 ... 264 V; DC 120 ... 372 V                |
| Input voltage derating                   | -2.5 %/V (< 95 VAC)                              |
| Nominal mains frequency range            | 44 ... 66 Hz; 0 Hz                               |
| Input current $I_i$                      | $\leq 0.46$ A (240 VAC); $\leq 0.86$ A (100 VAC) |
| Discharge current                        | $\leq 0.25$ mA                                   |
| Inrush current                           | $\leq 30$ A                                      |
| Power factor correction (PFC)            | Passive                                          |
| Mains failure hold-up time               | $\geq 120$ ms (230 VAC); $\geq 15$ ms (100 VAC)  |

#### Output

|                                           |                                      |
|-------------------------------------------|--------------------------------------|
| Nominal output voltage $U_{o\text{ nom}}$ | DC 12 V (SELV)                       |
| Output voltage range                      | DC 11.5 ... 14.5 V (adjustable)      |
| Default setting                           | DC 12 V                              |
| Nominal output current $I_{o\text{ nom}}$ | 4 A (12 VDC); 4.2 A (< 40 °C)        |
| Nominal output power                      | 48 W                                 |
| Control deviation                         | $\leq 1$ %                           |
| Residual ripple                           | $\leq 20$ mV (peak-to-peak)          |
| Current limitation                        | $1.1 \times I_{o\text{ nom}}$ (typ.) |
| Overload behavior                         | Constant current                     |

#### Signaling and communication

|                            |                                                                         |
|----------------------------|-------------------------------------------------------------------------|
| Signaling                  | 1 x LED DC OK (green)<br>1 x Active signal output DC OK (12 VDC; 40 mA) |
| Operation status indicator | Green LED ( $U_o$ )                                                     |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Efficiency/power losses

|                                        |                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------|
| Power loss $P_I$                       | $\leq 1 \text{ W}$ (230 VAC; no load); $\leq 8 \text{ W}$ (230 VAC; nominal load) |
| Power loss (max.) $P_{I(\text{max.})}$ | 9.1 W (100 VAC / 12 VDC; 4 A)                                                     |
| Efficiency (typ.)                      | 86 %                                                                              |

## Circuit protection

|                           |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Internal fuse             | T 4 A / 250 VAC                                                   |
| Required backup fusing    | An external DC fuse is required for the DC input voltage.         |
| Recommended backup fusing | Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C |

## Safety and protection

|                                   |                                                                                |
|-----------------------------------|--------------------------------------------------------------------------------|
| Isolation voltage (Pri.-Sec.)     | DC 4.242 kV                                                                    |
| Protection class                  | II                                                                             |
| Protection type                   | IP20 (per EN 60529)                                                            |
| Resistance to reverse feed        | $\leq \text{DC } 25 \text{ V}$                                                 |
| Overvoltage category              | II                                                                             |
| Transient suppression (primary)   | Varistor                                                                       |
| Overvoltage protection; secondary | Internal protective circuit<br>$\leq 35 \text{ VDC}$ (in the event of a fault) |
| Short-circuit-protected           | Yes                                                                            |
| Open-circuit-proof                | Yes                                                                            |
| Parallel operation                | Yes                                                                            |
| Series operation                  | Yes                                                                            |
| MTBF                              | > 500,000 h (per IEC 61709)                                                    |

## Connection data

|                         |                                  |
|-------------------------|----------------------------------|
| Connection type (1)     | Input/Output/Signaling           |
| Connection technology   | CAGE CLAMP®                      |
| WAGO Connector          | WAGO 721 Series                  |
| Solid conductor         | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Strip length            | 8 ... 9 mm / 0.31 ... 0.35 inch  |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Physical data

|                                   |                       |
|-----------------------------------|-----------------------|
| Width                             | 45 mm / 1.772 inch    |
| Height                            | 90 mm / 3.543 inch    |
| Depth from upper edge of DIN-rail | 107.5 mm / 4.232 inch |

## Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

## Material data

|        |         |
|--------|---------|
| Weight | 257.6 g |
|--------|---------|

## Environmental requirements

|                                         |                                                       |
|-----------------------------------------|-------------------------------------------------------|
| Surrounding air temperature (operation) | -25 ... 70 °C (Device starts at -40 °C (type-tested)) |
| Surrounding air temperature (storage)   | -25 ... 85 °C                                         |
| Relative humidity                       | 5 ... 96 % (no condensation permissible)              |
| Derating                                | -3 %/K (> 50 °C)                                      |
| Pollution degree                        | 2                                                     |
| Climatic category                       | 3K3 (per EN 60721)                                    |

## Standards and specifications

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Conformity marking       | CE                                                         |
| Standards/Specifications | EN 60950-1; EN 61204-3; EN 60335-1; UL 60950-1; UL 508; GL |

## Commercial data

|                       |                           |
|-----------------------|---------------------------|
| Product Group         | 6 (Interface Electronics) |
| Packaging type        | BOX                       |
| Country of origin     | DE                        |
| GTIN                  | 4055143060448             |
| Customs tariff number | 85044082900               |

## Approvals / Certificates

### Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
|      | GL       | -                        | 14788-           |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Germanischer Lloyd

15HH

## UL-Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|------------------|
|  | UL<br>Underwriters Laboratories Inc. | UL 508                   | E255817          |
|  | UL<br>Underwriters Laboratories Inc. | UL 60950-1               | E255815          |

## Compatible products

## ferrule

|                                                                                   |                                                                                                                                                                                            |                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|   | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white                                                                         | <a href="http://www.wago.com/216-201">www.wago.com/216-201</a> |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray                                                                         | <a href="http://www.wago.com/216-202">www.wago.com/216-202</a> |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red                                                                             | <a href="http://www.wago.com/216-203">www.wago.com/216-203</a> |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black                                                                         | <a href="http://www.wago.com/216-204">www.wago.com/216-204</a> |
|  | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white                                                                         | <a href="http://www.wago.com/216-221">www.wago.com/216-221</a> |
|  | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray                                                                         | <a href="http://www.wago.com/216-222">www.wago.com/216-222</a> |
|  | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red                                                                             | <a href="http://www.wago.com/216-223">www.wago.com/216-223</a> |
|  | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black                                                                         | <a href="http://www.wago.com/216-224">www.wago.com/216-224</a> |
|  | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|                                                                                   | <b>Item no.: 216-242</b>                                                                                                                                                                   |                                                                |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

|                                                                                   |                                                                                                                                                                                |                                                                |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|    | Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray                             | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |
|    | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-244">www.wago.com/216-244</a> |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-262">www.wago.com/216-262</a> |
|    | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-263">www.wago.com/216-263</a> |
|    | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-264">www.wago.com/216-264</a> |
|    | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-284">www.wago.com/216-284</a> |
|                                                                                   | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow                                                                       | <a href="http://www.wago.com/216-301">www.wago.com/216-301</a> |
|   | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; green                                                                        | <a href="http://www.wago.com/216-302">www.wago.com/216-302</a> |
|                                                                                   | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow                                                                       | <a href="http://www.wago.com/216-321">www.wago.com/216-321</a> |
|  | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; green                                                                        | <a href="http://www.wago.com/216-322">www.wago.com/216-322</a> |

## Marking accessories

|                                                                                    |                                                                                                                                              |                                                                                  |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | <b>Item no.: 2009-110</b><br>Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white                         | <a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>                 |
|  | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
|  | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a> |
|  | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a> |
|  | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a> |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

|                                                                                    |                                                                                                                                                   |                                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a> |
|    | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a> |
|    | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |
|    | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|    | <b>Item no.: 210-831</b><br>Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white                                                     | <a href="http://www.wago.com/210-831">www.wago.com/210-831</a>                   |
|    | <b>Item no.: 210-832</b><br>Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white                                                       | <a href="http://www.wago.com/210-832">www.wago.com/210-832</a>                   |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | <a href="http://www.wago.com/793-501">www.wago.com/793-501</a>                   |
|   | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow                                       | <a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>   |
|  | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; red                                          | <a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a>   |
|  | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; blue                                         | <a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a>   |
|  | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray                                         | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a>   |
|  | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange                                       | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a>   |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green                                  | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a>   |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green                                        | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a>   |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)
**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)
**Item no.: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/793-5501/000-002](http://www.wago.com/793-5501/000-002)
**Item no.: 793-5501/000-005**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/793-5501/000-005](http://www.wago.com/793-5501/000-005)
**Item no.: 793-5501/000-006**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/793-5501/000-006](http://www.wago.com/793-5501/000-006)
**Item no.: 793-5501/000-007**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/793-5501/000-007](http://www.wago.com/793-5501/000-007)
**Item no.: 793-5501/000-012**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/793-5501/000-012](http://www.wago.com/793-5501/000-012)
**Item no.: 793-5501/000-014**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

[www.wago.com/793-5501/000-014](http://www.wago.com/793-5501/000-014)
**Item no.: 793-5501/000-017**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/793-5501/000-017](http://www.wago.com/793-5501/000-017)
**Item no.: 793-5501/000-023**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/793-5501/000-023](http://www.wago.com/793-5501/000-023)
**Item no.: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)
**tools****Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)
**Item no.: 210-769**

SCREWDRIVER; green

[www.wago.com/210-769](http://www.wago.com/210-769)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.





## Downloads

### Documentation

#### Bid Text

|                         |             |               |          |
|-------------------------|-------------|---------------|----------|
| 787-1611<br>X81 - Datei | Jul 4, 2019 | xml<br>7.1 kB | Download |
|-------------------------|-------------|---------------|----------|

|                          |              |                 |          |
|--------------------------|--------------|-----------------|----------|
| 787-1611<br>docx - Datei | May 31, 2019 | docx<br>20.4 kB | Download |
|--------------------------|--------------|-----------------|----------|

#### Instruction Leaflet

|                                                                            |  |                 |          |
|----------------------------------------------------------------------------|--|-----------------|----------|
| Primär getaktete Stromversorgungen EPSITRON® CLASSIC Power<br>DC 12 V, 4 A |  | pdf<br>321.7 kB | Download |
|----------------------------------------------------------------------------|--|-----------------|----------|

#### Additional Information

|                                                          |         |                 |          |
|----------------------------------------------------------|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|----------------------------------------------------------|---------|-----------------|----------|

## CAD/CAE-Data

### CAD data

|                       |     |          |
|-----------------------|-----|----------|
| 2D/3D Models 787-1611 | URL | Download |
|-----------------------|-----|----------|

### CAE data

|                            |     |          |
|----------------------------|-----|----------|
| EPLAN Data Portal 787-1611 | URL | Download |
|----------------------------|-----|----------|

|                         |     |          |
|-------------------------|-----|----------|
| WSCAD Universe 787-1611 | URL | Download |
|-------------------------|-----|----------|

|                       |     |          |
|-----------------------|-----|----------|
| ZUKEN Portal 787-1611 | URL | Download |
|-----------------------|-----|----------|

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Product family

### EPSITRON CLASSIC Power

EPSITRON® CLASSIC POWER: The Robust Power Supply – with Integrated TopBoost (Optional)

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.