


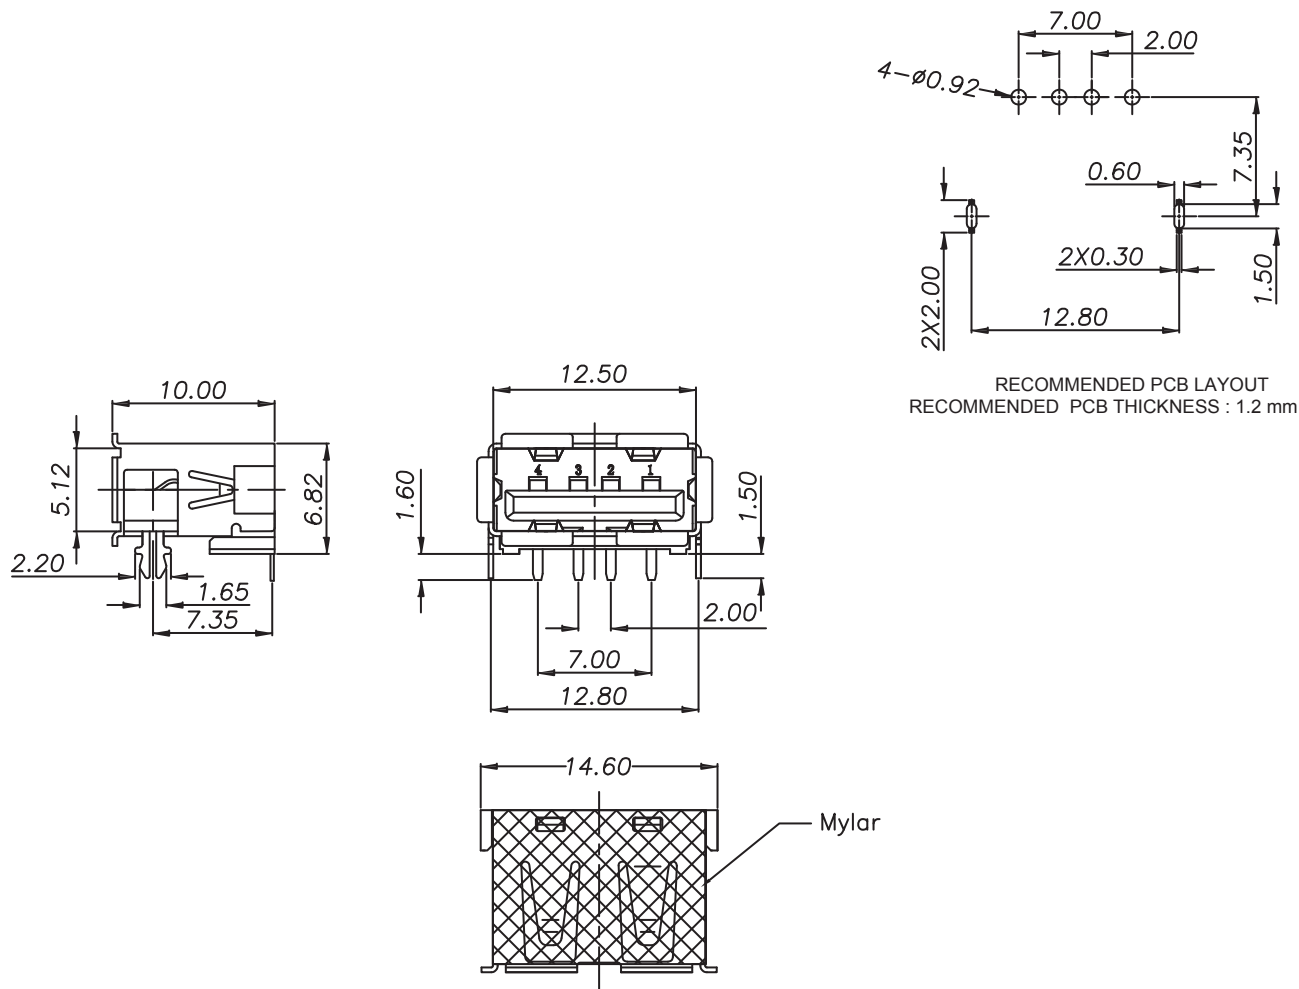

TECHNICAL CHARACTERISTICS


MATERIAL
INSULATOR: PA 6T
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS NI PLATED
QUALITY CLASS: 1500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 30 VAC
INSULATION RESISTANCE: >100 MΩ
WITHSTANDING VOLTAGE: 500 VAC/MIN
CONTACT RESISTANCE: 30 mΩ MAX

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TAPE & REEL WITH MYLAR

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15			SIZE A4
G								
F								
E								
D								
C	09-AVR-15	PCB THICKNESS	QP	APPROVAL: NPr	UNIT: MM	DESCRIPTION: HORIZONTAL USB2.0 A TYPE THT SLIM TYPE		
B	27-OCT-14	REVIEW	QL		SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 1/3			
REV	DATE	FILE	BY		DRAW: AS			

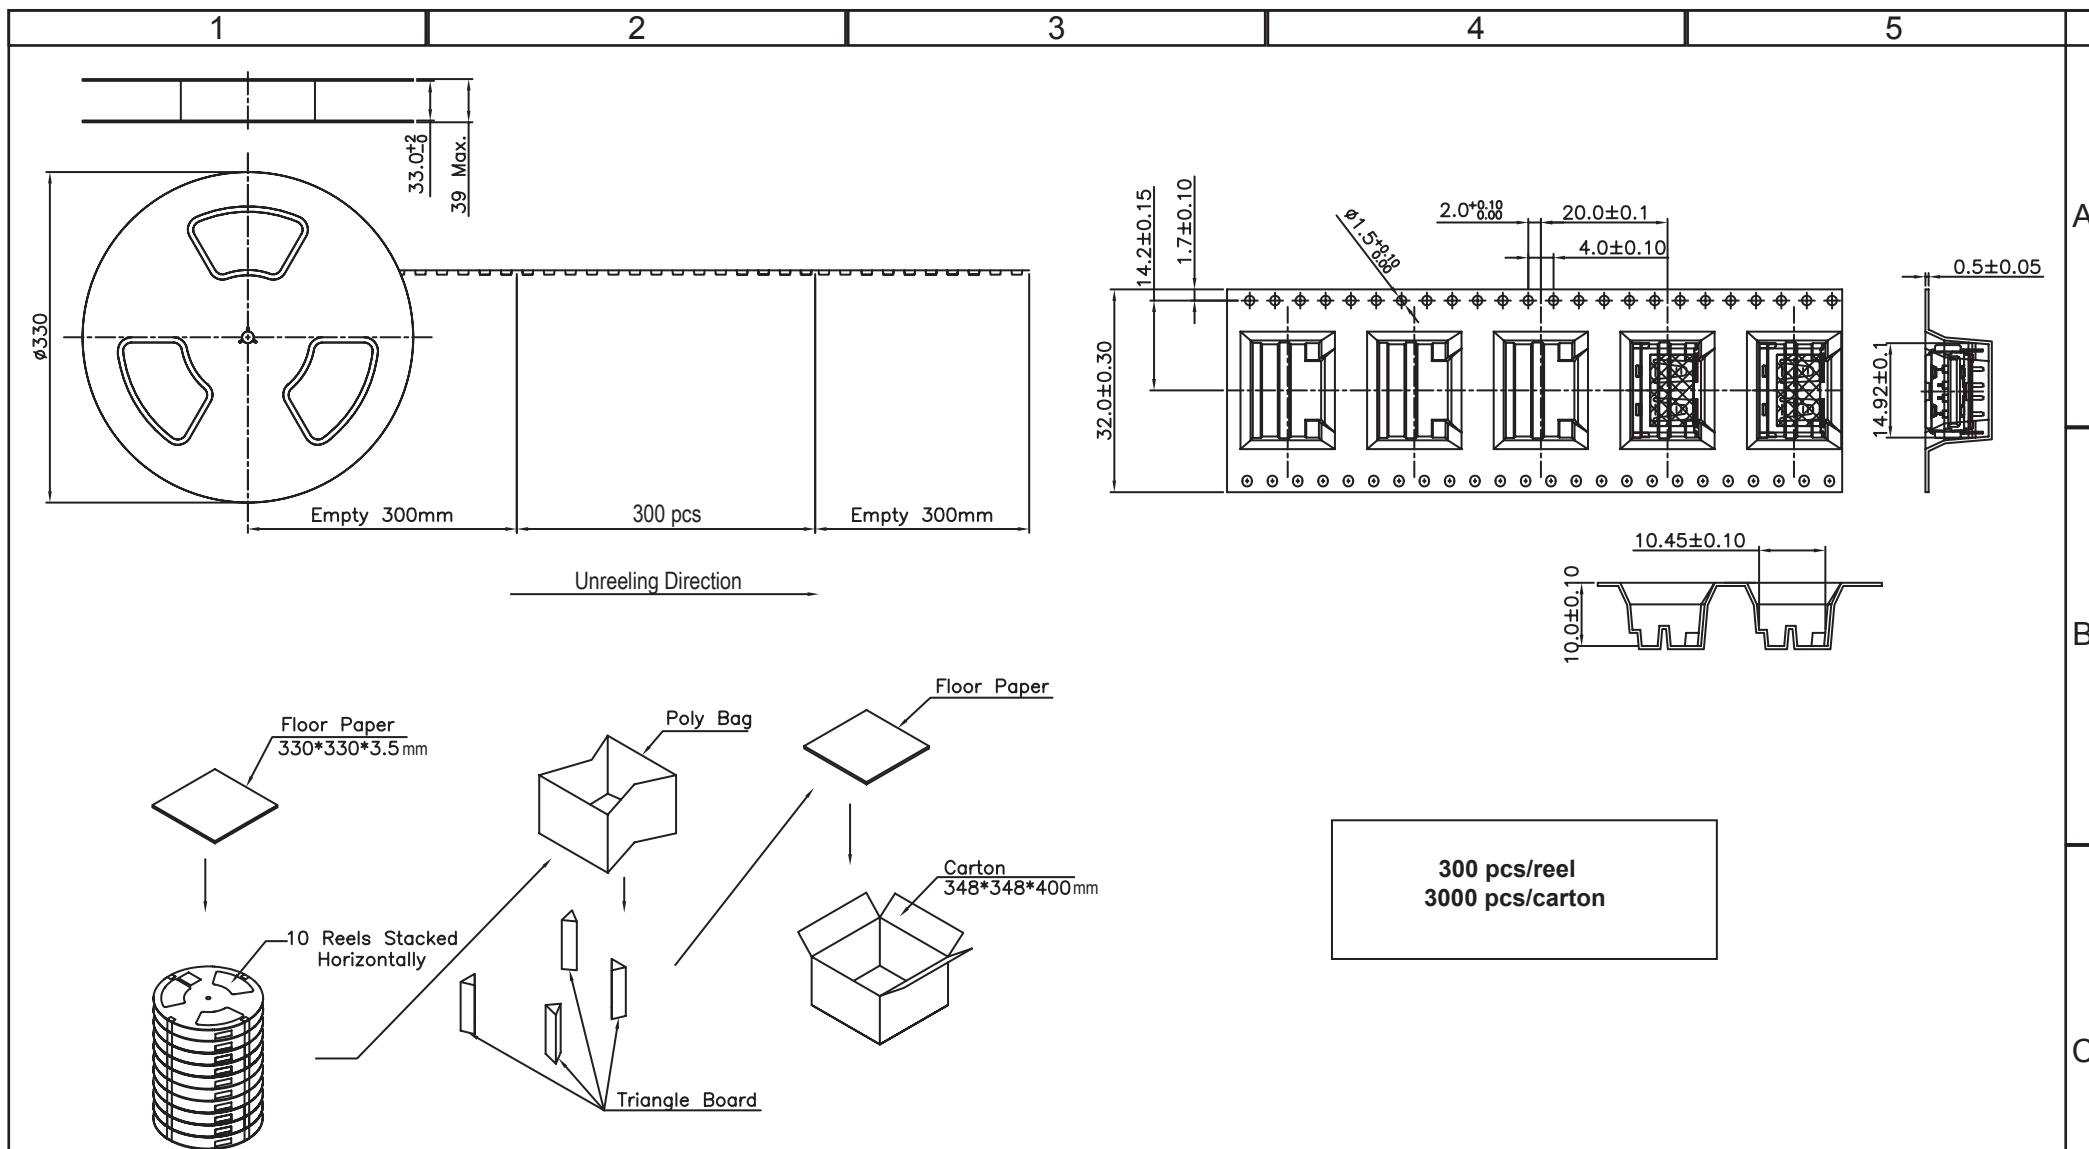

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15		DESCRIPTION: HORIZONTAL USB2.0 A TYPE THT SLIM TYPE WERI PART NO: 614 104 150 121	SIZE A4
G								
F								
E								
D								
C				APPROVAL: NPr	UNIT: MM			
B					SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 2/3			
REV	DATE	FILE	BY		DRAW: AS			

