


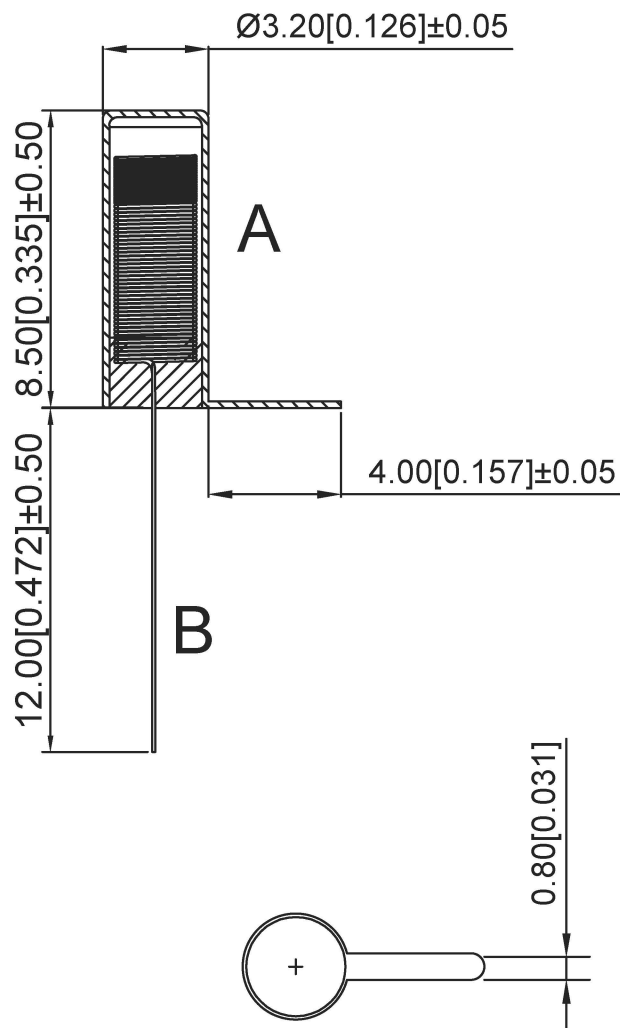

XKB Product features

Voltage: < 12V

Current: < 20mA

Conduction time: 2ms

Closed circuit resistance: < 30m ohm

Open circuit resistance: > 10m ohm

High temperature resistance: 240 degrees

Terminal tension: 500gf / min

Humidity: 95RH 40 degrees 96 hours

Operating life: 200000 times

XKB 产品特性:

Product features:

1.SW-58010P为密封型无方向性振动感应出发开关, 任何角度均可触发。

1.SW-58010P is a sealed non-directional vibration induction starting switch, which can be triggered at any Angle.

2.本系列开关在静止世为开路OFF状态, 当受到外力碰触而达到相应振动力时, 或者移动速度达到适应(偏)离心力时, 导电接脚会产生瞬间导通而呈ON状态; 当外力消失时, 开关恢复为开路OFF状态。

2. This series of switches in the static world is open circuit OFF state, when the external force to touch the corresponding vibration force, or moving speed to adapt to (partial) centrifugal force, conductive pin will produce instantaneous conduction and show ON state; When the external force disappears, the switch reverts to the open OFF state.

3.本系列开关带P型号, 为密封式封装。

3. This series switch with P model, sealed package.

4.本系列开关触发灵敏度。

4. This series of switch trigger sensitivity is high.

5.本系列开关在正常使用寿命可以达到200000次。

5. This series of switches can reach 200000 times in normal service life.

6.本系列开关适用于, 防盗报警器, 电子秤, 移动电源, 玩具等系列传感类型电子产品。

6. This series of switches are suitable for burglar alarm, electronic scale, mobile power supply, toys and other sensor type electronic products.

XKB

⑤		1			
④	Coat the brass	1	Brass	NICKE	
③	sealing rubber	1	Rohs epoxy resin		
②	spring B	1	SUS	0.1	
①	body A	1	Brass	silver plating	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

生	日期
数	日期
Δx	
Δx	
MARK	文件工程章

DESCRIPTION

REVISIONS

DATE

REVISED

APPROVED

UNSPECIFIED TOLERANCES

units: mm

tolerance:

X.X

X.XX

X.XXX

±0.2mm

±0.1mm

±0.05mm

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	Vibration switch
CHKD		DATE		UNIT: mm/in	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED					SW-58010PWD-4A12S1
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	