

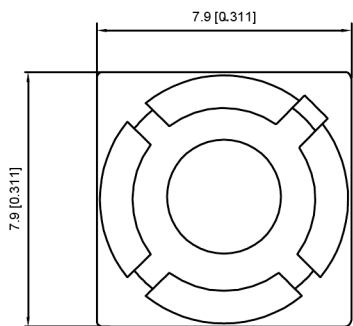
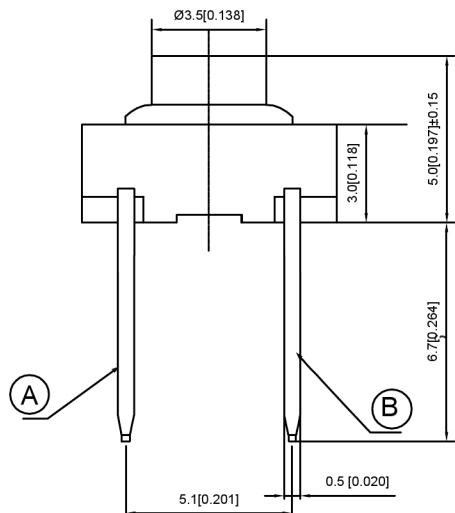



SCHEMATIC

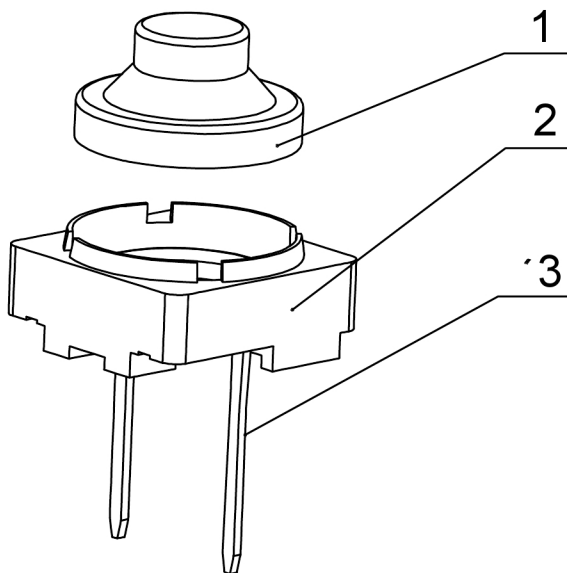

Recommended P.C.B layout

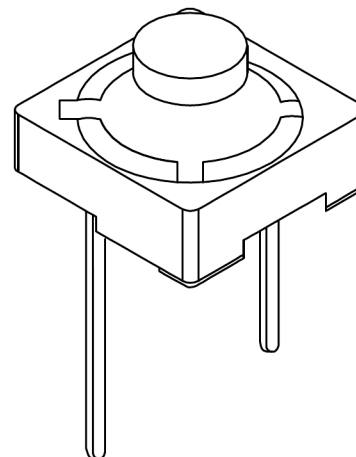

SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	1.2mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TC-1117D-X
Operating Force	A:120gf B:160gf C:260gf
Height	H:5.0

		—				—
		—				—
③	Terminal	—	2	Brass (0.30t)	Plating silvering	—
②	Base	—	1	Pa46		—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX		日期
ΔX		
ΔX		
MARK		

文件工程章

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
REVISION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	TACT SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	TC-1117D-X
			DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISIC
			1/1
			A0