
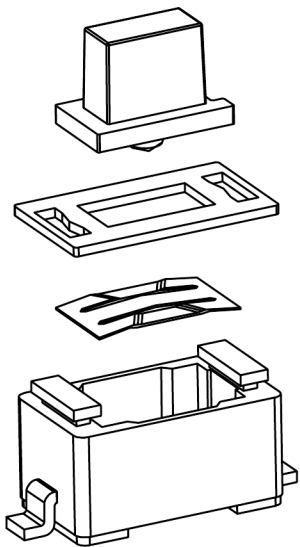


PCB.WELDING DRAWING



CIRCUIT DIAGRAM

SPECIFICATION

Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.20mm
Operating Temp: -20℃~+70℃
Storage Temp: -30℃~+80℃

PAPT NO	TS-1101S-X-X-B-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:4.3 B:5.0 C:6.0 D:7.0
Fixed column	A:With B:without
Color	B:black W:white

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PPA		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	PPA		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

					ANGLAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
					UNSPECIFIED TOLERANCES	
					REVISIONS	
					DATE	
					REVISED	
					APPROVED	
					DATE	
					DESCRIPTION	



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW: ①	TACT SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	TS-1101S-X-X-B-X-X
			DWG NO.:
			WEIGHT
			SHEET
			REVISIC
			1/1
			A0