

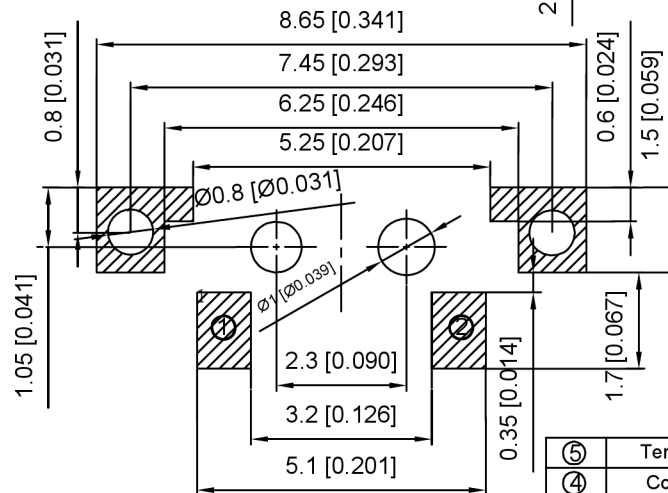
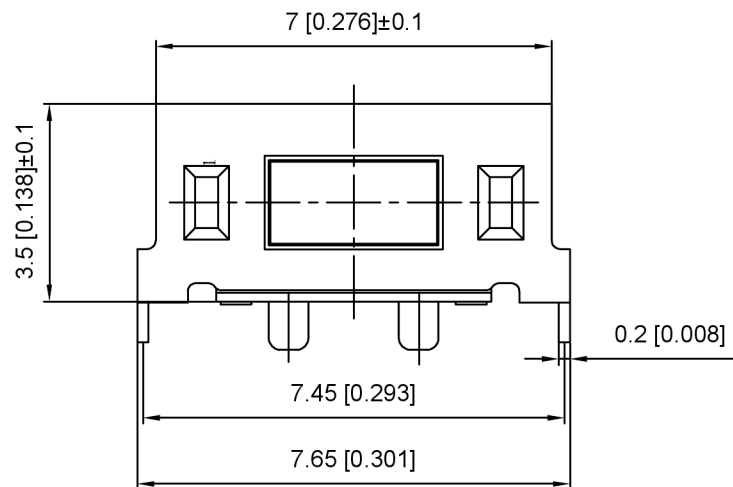
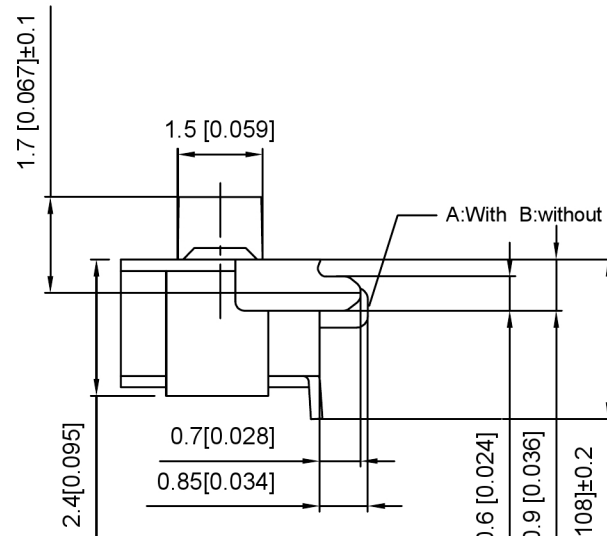


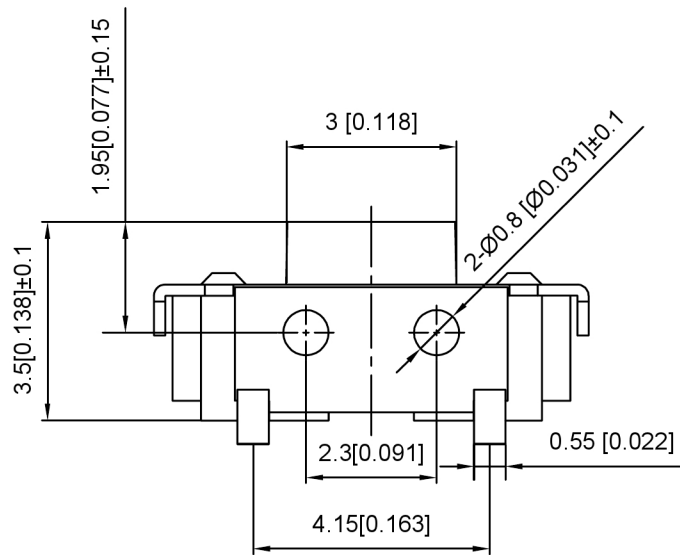

CIRCUIT DIAGRAM



SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TS-1101VA-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.5
Fixed column	A:With B:without
Keystake	A:PA46: B:Silica gel

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Lcp	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

Δx		日期
Δx		
Δx		
MARK		

DESCRIPTION

DATE

REVISED

APPROVED

REVISIONS

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm/in	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED					TS-1101VA-X-X-X
WEIGHT		SHEET		REVISIO	
1.0g		1/1		A0	

文件工程章

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn