



CIRCUITDIAGRAM





SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PCB LAND DIMENSION

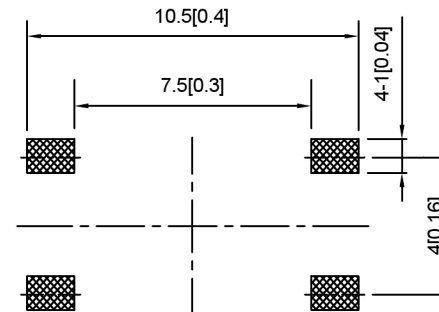

PAPT NO	TS-1159B-X-X-X
Operating Force	A:100gf B:160gf C:260gf D:320gf E:400gf
Height	H: A:3.4 B:4.2 C:4.8 D:5.1
Color	BL:blue W:white

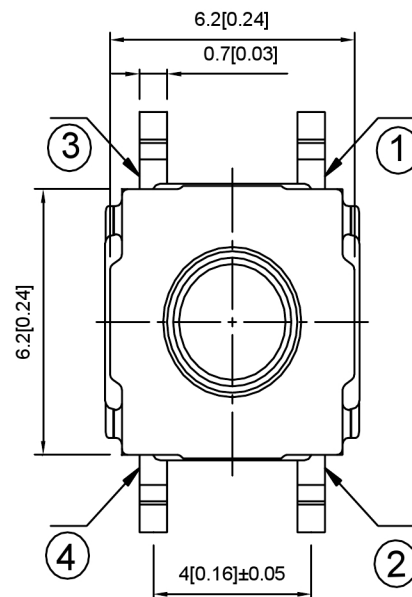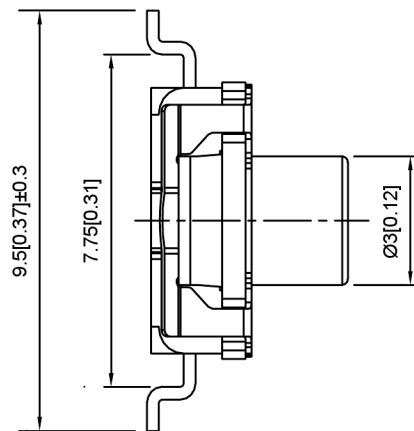

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PA46		—
②	Cover	—	1	SPSS	Plating Nickel	—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

					ANGULAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	

	DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
	DWN		VIEW: 	PART NO.: TS-1159B-X-X-X		
	CHKD		UNIT: mm/in	DWG NO.:		
	APPD		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISI
					1/1	A0

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED