

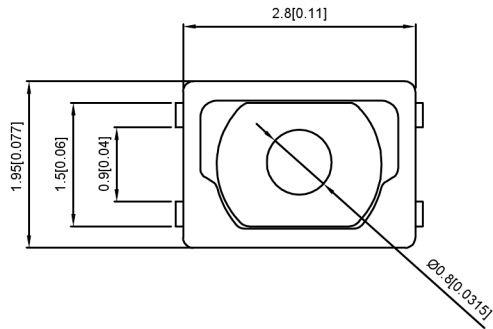



SC 1:150




DETAL:A
SC
10:1

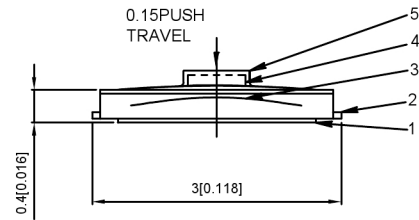

TEASCALE:2.5/1

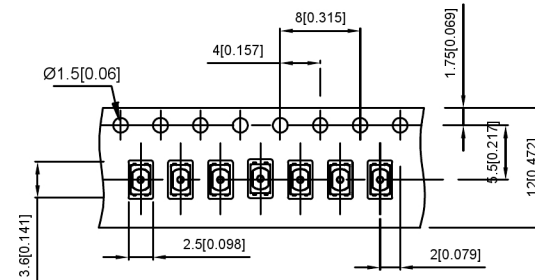

SC 1:10

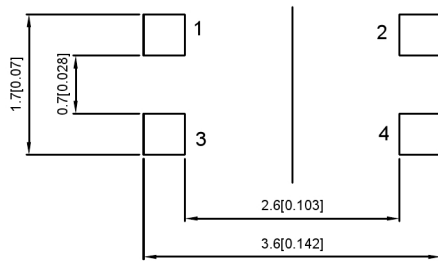

CIRCUIT DIAGRAM

Recommended PAD Layout
Recommended solder thickness: T=0.10±0.01

- 1.RATING:DC 12V,50mA MAX
- 2.TRAVEL:0.15±0.1mm
- 3.LIFE:300,000cycles
- 4.PACKAGE:10000Pcs/Reel

PAPT NO	TS-1928-X
Operating Force	B:160gf C:260gf

5	COVER	1	PA	WHITE
4	KNOB	1	PI	BLACK
3	CONTACT	2	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	CASE	1	PPA	BLACK
ITEM	PART NAME	QTY	MATERIAL	FINISH

广东星坤科技股份有限公司

日期
文件工程章

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	TACT SWITCH
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	TS-1928-X
		DWG NO.:
		WEIGHT
		SHEET
		REVISIC
		1/1
		A0

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED