






Code-x	H
A	4.3
B	4.5
C	5.0
D	5.5
E	6.0
F	6.5
G	7.0
H	7.5
I	8.0
J	8.5
K	9.0

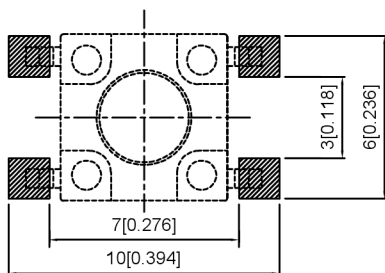

PCB LAYOUT PLAN



CIRCUIT DIAGRAM

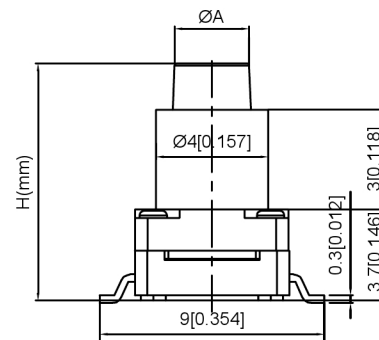

Code-X	H
L	9.5
M	10.0
N	10.5
O	11.0
P	11.5
Q	12
R	12.5
S	13.0
T	13.5
U	14.0
V	15.0
W	15.5
X	16
Y	16.5
Z	17
18	18
19	19

SPECIFICATION

Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

PAPT NO	TS-FS66T-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PPA		—
②	Cover	—	1	PPA		—
①	Keystake	—	1	PPA		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX		日期
ΔX		日期
ΔX		日期
MARK		日期

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L≤ 4				±0.2
4<L≤ 16				±0.3
16<L≤ 63				±0.4
L> 63				±0.5

	DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
	DWN		VIEW: 	PART NO.: TS-CB1157-X-X		
	CHKD		UNIT: mm/in	DWG NO.:		
	APPD		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISIC
					1/1	A0

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED