
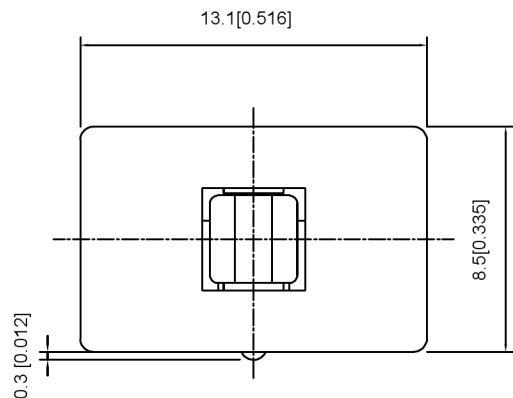
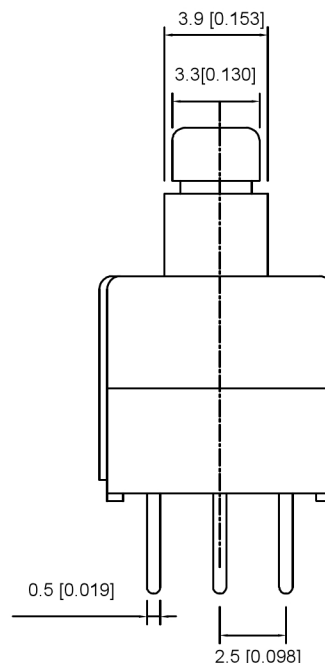


SCHEMATIC

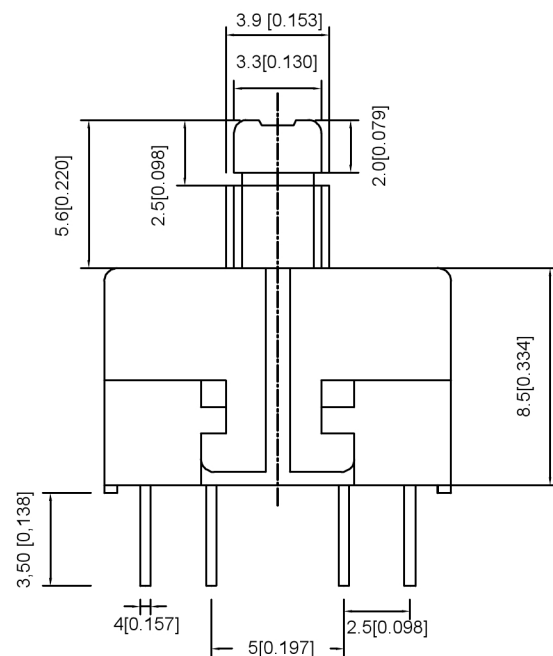

FEATURES

- Light operating force
- Long term low contact resistance
- Momentary or latching operation
- Short stroke 1.5mm to latch
- Compact spacing on PCB of 13X 8.5mm

SPECIFICATIONS

1. ELECTRICAL

● Contact rating	0.1A, 30VDC
● Contact resistance	50mW Max
● Insulation resistance	100M W Min .at 250VDC
● Dielectric strength	250VAC Min .for 60sec

2. MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Operating -15°C to +55°C storage -25°C to +65°C
● Operation	160±80gf
● Stroke	Lock Stroke .1.5±0.2mm Full stroke, 25±0.2mm
● Operating life	Full load: 1 x 10 ⁴ cycles No load: 1 x 10 ⁵ cycles
● Contact form	DPDT

PART NO	XKB1385-X
OPERATION	W:NO LOCK Z:LOCK

⑦	Contact	—	4	Phosphor bronze	Plating silvering	—
⑥	Terminal	—	12	Brass	Plating silvering	—
⑤	Spring	—	1	Sus	Natural	—
④	Base	—	1	Nylon		—
③	Crochet Needle	—	1	Sus	Natural	—
②	Cover	—	1	Nylon		—
①	Keystake	—	1	Nylon		—
ITEM	PART NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

日期
文件工程章

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5

DSND		SCALE: N/A	MODEL TYPE: KEY SWITCH
DWN		VIEW:	PART NO.: XKB1385-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET 1/1
			REVISIC A0