


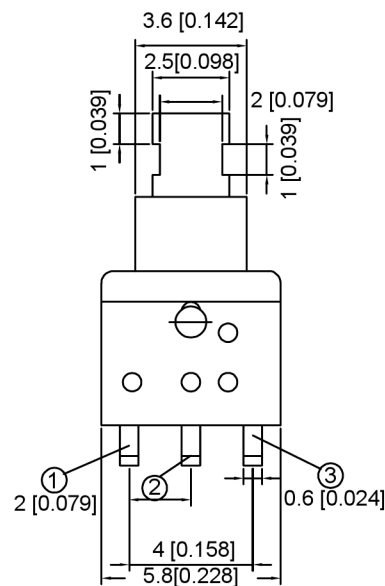


- Light operating force
- Long term low contact resistance
- Momentary or latching operation
- Short stroke 1.5mm to latch
- Compact spacing on PCB of 5.8mm

1.ELECTRICAL

● Contact rating	0.1A, 30VDC
● Contact resistance	50mVMax.
● Insulation resistance	100MΩMin. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

● Temperature rating	Operating: -15 °C to +55 °C Storage: -25 °C to +65 °C
● Operation force	160±80gf
● Stroke	Lock Stroke: 1.5±0.2mm Full Stroke: 2.0±0.2mm
● Operating life	full load: 1×10 ⁴ cycles no load: 1×10 ⁵ cycles
● Contact form	DPDT

PAPT NO	XKB5858-X-C
OPERATION	W:NO LOCK Z:LOCK



⑦	Contact	—	1	Phosphor bronze	Plating silvering	_____
⑥	Terminal	—	3	Brass	Plating silvering	_____
⑤	Spring	—	1	Sus	Natural	_____
④	Base	—	1	Nylon		_____
③	Crochet Needle	—	1	Sus	Natural	_____
②	Cover	—	1	Nylon		_____
①	Keystake	—	1	Nylon		_____
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

ΔX		日期
Δx		
ΔX		
MARK		
		DESCR

文件工程章

广东星坤科技股份有限公司							DSND		SCALE: N/A		MODEL TYPE: KEY SWITCH		
							DWN		VIEW: 		PART NO.: XKB5858-X-C		
							CHKD		UNIT: mm/in		DWG NO.:		
							APPD		SIZE: A4				
ΔX Δx ΔX MARK 日期 DESCRIPTION DATE REVISED APPROVED							ANGLAR ±5° ≤ 4 ±0.2 4<L≤ 16 ±0.3 16<L≤ 63 ±0.4 L> 63 ±0.5						
文件工程章							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED		WEIGHT		
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn											SHEET		
											1/1		
											REVISIC		
											A0		