



A 3x3 grid with numbers 1 through 6 in the corners and various shapes in the center cells. The shapes include small squares, rectangles, and a central square with a smaller square inside it.

1 2 3

6 5 4

Technical drawing of a mechanical part with dimensions in mm and inches:

- Top width: 3.3 [0.13]
- Top width (inner): 1.7 [0.07]
- Height from base to top of top section: 8.95 [0.352]
- Height from base to top of middle section: 8.4 [0.331]
- Bottom width: 3.5 [0.14]

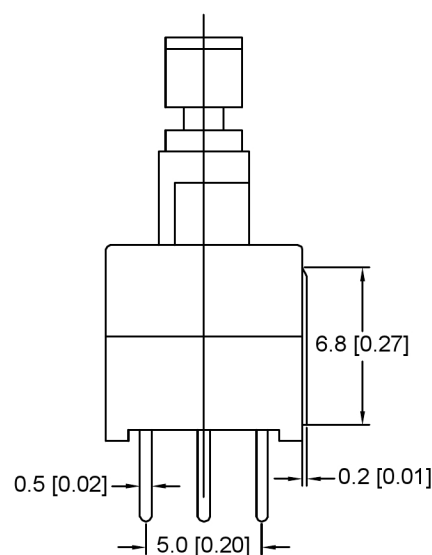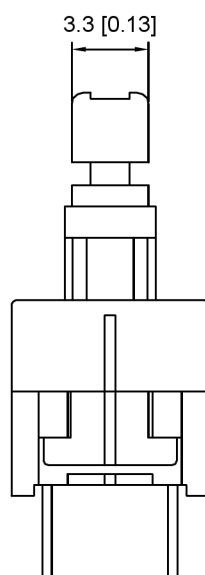

● Temperature rating	Operating: -15 °C to +55 °C Storage: -25 °C to +65 °C
● Operation force	160±80gf
● Stroke	Lock Stroke: 2.0±0.2mm Full Stroke: 2.5±0.2mm
● Operating life	full load: 1×10^4 cycles no load: 1×10^5 cycles
● Contact form	DPDT

PAPT NO	XKB8585-X-170
OPERATION	W:NO LOCK Z:LOCK

⑦	Contact	—	2	Phosphor bronze	Plating silvering	—
⑥	Terminal	—	6	Brass	Plating silvering	—
⑤	Spring	—	1	Sus	Natural	—
④	Base	—	1	Pbt		—
③	Crochet Needle	—	1	Sus	Natural	—
②	Cover	—	1	Pom		—
①	Keystake	—	1	Pom		—
ITEM	PAPT NAMF	ITER.NO	QTY	MATERIAL	FINISHING	REMARK

ANGLAR	$\pm 5^\circ$
$L \leq 4$	± 0.2
$4 < L \leq 16$	± 0.3
$16 < L \leq 63$	± 0.4
$L > 63$	± 0.5

XKIE

DSND		SCALE: N/A	MODEL TYPE: KEY SWITCH		
DWN		VIEW: 	PART NO.: XKB8585-X-170		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
L. PRECISION CO., LIMITED			WEIGHT	SHEET	REVISI
				1/1	A0