
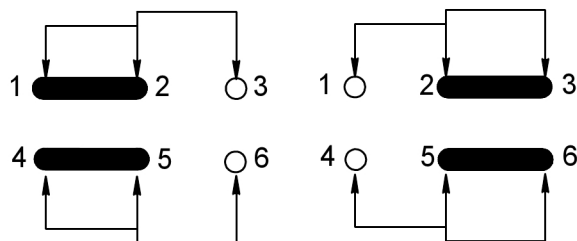



P.C.B LAYOUT

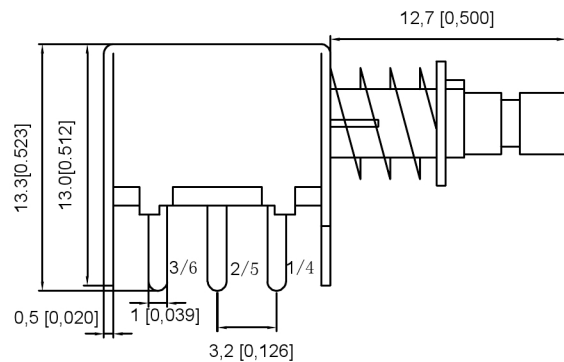

常态: 1-2导通 4-5导通
按下: 2-3导通 5-6导通

FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 3.0mm to latch.

SPECIFICATIONS

1.ELECTRICAL

● Contact rating	0.3 A, 50VDC
● Contact resistance	50mVMax.
● Insulation resistance	100MWMin. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

2.MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Operating: -15℃ to +55℃ Storage: -25℃ to +65℃
● Operation force	250±80gf
● Stroke	Lock Stroke: 3.0±0.3mm Full Stroke: 3.5±0.3mm
● Operating life	full load: 1x10 ⁴ cycles no load: 1x10 ⁵ cycles

PAPT NO	XKBS22E05-X
OPERATION	W:NO LOCK Z:LOCK

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑦	Bottom plate	—	1	Phenolic Resin	Natural	—
⑥	Contact	—	2	Phosphor bronze	ag Plated	—
⑤	Terminal	—	6	Brass	Plating silvering	—
④	Spring	—	1	Sus	Natural	—
③	Base	—	1	Spcc	Plating Nickel	—
②	Crochet Needle	—	1	Sus	Natural	—
①	Keystake	—	1	Pa66		—

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

DSND	SCALE: N/A	MODEL TYPE: KEY SWITCH
DWN	VIEW:	PART NO.: XKBS22E05-X
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED		
WEIGHT	SHEET 1/1	REVISIC A0