

JTK Series



- Very High Power Density
- Wide 4:1 Input Range
- Operating Temperature -40°C to $+100^{\circ}\text{C}$
- Single & Dual Outputs
- 1600 VDC Isolation
- High Efficiency – up to 89%
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 24 V (9-36 VDC) • 48 V (18-75 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple Current	• JTK15: 20 mA pk-pk • JTK20: 30 mA pk-pk through 12 μH inductor and 47 μF capacitor, 5 Hz to 20 MHz
Input Surge	• 24 V models: 50 VDC for 100 ms • 48 V models: 100 VDC for 100 ms

Output

Output Voltage	• See table
Output Trim	• $\pm 10\%$ max on single output
Minimum Load	• No minimum load required
Initial Set Accuracy	• $\pm 1\%$ max
Start Up Delay	• 20 ms typical
Line Regulation	• JTK15: $\pm 0.2\%$ max, JTK20: $\pm 0.5\%$ max
Load Regulation	• $\pm 0.5\%$ max single, $\pm 1.0\%$ max dual
Cross Regulation	• $\pm 5\%$ on dual output models, (see note 2)
Transient Response	• $< 3\%$ max deviation, recovery to within 1% in 250 μs for a 25% load change
Ripple & Noise	• 100 mV pk-pk, 20 MHz bandwidth, (see note 3)
Overload Protection	• JTK15: 170% of full load typical, JTK20: 150% of full load typical
Overvoltage Protection	• 3.3 V models: 3.9 V typical • 5 V models: 6.2 V typical • 12 V models: 15 V typical • 15 V models: 18 V typical • ± 5 V models: ± 6.2 V typical • ± 12 V models: ± 15 V typical • ± 15 V models: ± 18 V typical
Short Circuit Protection	• Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	• See table
Temperature Coefficient	• $\pm 0.02/^{\circ}\text{C}$ max
Remote On/Off	• On > 3.0 VDC or open circuit • Off < 1.2 VDC or short circuit pins 2 & 3

General

Efficiency	• See table
Isolation	• 1600 VDC Input to Output • 1600 VDC Input to Case • 1600 VDC Output to Case
Isolation Capacitance	• JTK15: 1200 pF max • JTK20: 1000 pF max
Switching Frequency	• JTK15: 375 kHz typical • JTK20: 330 kHz typical
Power Density	• JTK15: 38.4 W/in³, JTK20: 51.3 W/in³
MTBF	• > 560 Khrs to MIL-STD-217F at 25°C, GB

Environmental

Operating Temperature	• -40°C to $+100^{\circ}\text{C}$, JTK15: derate from 100% load at $+65^{\circ}\text{C}$ to no load at $+100^{\circ}\text{C}$, JTK20: derate from 100% load at $+55^{\circ}\text{C}$ to no load at $+100^{\circ}\text{C}$
Case Temperature	• $+105^{\circ}\text{C}$ max
Storage Temperature	• -40°C to $+125^{\circ}\text{C}$
Humidity	• Up to 90%, non-condensing
Cooling	• Natural convection

EMC

Emissions	• EN55022, Level A conducted & radiated with external components - see applications note
ESD Immunity	• EN61000-4-2, Level 2 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, Level 3 Perf Criteria A*
Conducted Immunity	• EN61000-4-6, 3 V rms Perf Criteria A
Magnetic Fields	• EN61000-4-8, 1 A/m Perf Criteria A

*External input capacitor required 220 μF / 100 V.

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-36 V	3.3 V	4.000 A	15 mA	647 mA	1000 μF	86%	JTK1524S3V3↑↗
	5.0 V	3.000 A	15 mA	727 mA	1000 μF	87%	JTK1524S05↑↗
	12.0 V	1.300 A	15 mA	747 mA	330 μF	88%	JTK1524S12↑↗
	15.0 V	1.000 A	15 mA	710 mA	220 μF	89%	JTK1524S15↑↗
	±5.0 V	±1.500 A	15 mA	744 mA	±470 μF	85%	JTK1524D05↑↗
	±12.0 V	±0.625 A	15 mA	720 mA	±220 μF	88%	JTK1524D12↑↗
	±15.0 V	±0.500 A	15 mA	710 mA	±100 μF	89%	JTK1524D15↑↗
18-75 V	3.3 V	4.000 A	10 mA	331 mA	1000 μF	84%	JTK1548S3V3↑↗
	5.0 V	3.000 A	10 mA	368 mA	1000 μF	86%	JTK1548S05↑↗
	12.0 V	1.300 A	10 mA	378 mA	330 μF	87%	JTK1548S12↑↗
	15.0 V	1.000 A	10 mA	360 mA	220 μF	88%	JTK1548S15↑↗
	±5.0 V	±1.500 A	10 mA	377 mA	±470 μF	84%	JTK1548D05↑↗
	±12.0 V	±0.625 A	10 mA	363 mA	±220 μF	87%	JTK1548D12↑↗
9-36 V	3.3 V	4.500 A	50 mA	720 mA	10000 μF	86%	JTK2024S3V3↑↗
	5.0 V	4.000 A	50 mA	936 mA	5000 μF	89%	JTK2024S05↑↗
	12.0 V	1.670 A	22 mA	936 mA	850 μF	89%	JTK2024S12↑↗
	15.0 V	1.330 A	22 mA	936 mA	700 μF	89%	JTK2024S15↑↗
	±12.0 V	±0.833 A	25 mA	936 mA	±470 μF	89%	JTK2024D12↑↗
	±15.0 V	±0.667 A	25 mA	936 mA	±330 μF	89%	JTK2024D15↑↗
18-75 V	3.3 V	4.500 A	30 mA	309 mA	10000 μF	86%	JTK2048S3V3↑↗
	5.0 V	4.000 A	30 mA	468 mA	5000 μF	89%	JTK2048S05↑↗
	12.0 V	1.670 A	15 mA	468 mA	850 μF	89%	JTK2048S12↑↗
	15.0 V	1.330 A	15 mA	468 mA	700 μF	90%	JTK2048S15↑↗
	±12.0 V	±0.833 A	15 mA	468 mA	±470 μF	89%	JTK2048D12↑↗
	±15.0 V	±0.667 A	15 mA	468 mA	±330 μF	89%	JTK2048D15↑↗


Notes

1. Input current measured at nominal 24 V and 48 V input.
2. When one output is set to 100% load, and the other varies between 25% and 100% load.
3. Measured with 1 μ F ceramic capacitor and 10 μ F tantalum capacitor across output rails.

† Available from Farnell & element14. See pages 284-290.

^ Available from Newark. See pages 291-296

Mechanical Details

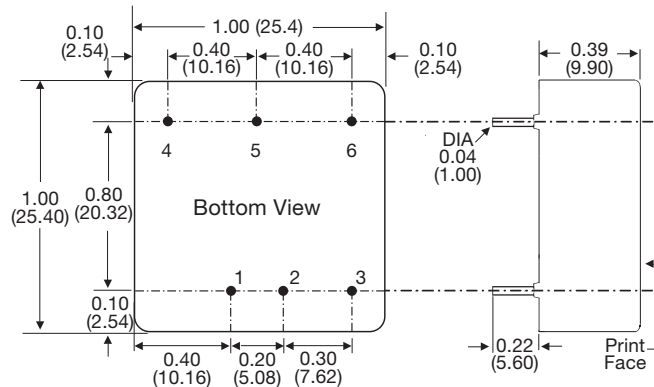


Pin Connections		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (20 g) approx.
3. Pin diameter: 0.04 ± 0.002 (1.0 ± 0.05)
4. Pin pitch tolerance: ± 0.014 (± 0.35)
5. Case tolerance: ± 0.02 (± 0.5)

Application Notes


Output Trim



Trim Resistor Values		
Model Number	Trim up 10%	Trim down 10%
JTK - S3V3	8 k	12 k
JTK - S05	10 k	5 k
JTK - S12	20 k	7 k
JTK - S15	20 k	6 k

Approximate values.

Input Filter

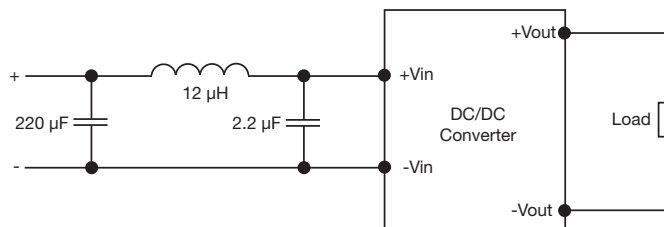

Output can be externally trimmed by using this method.
(Single output models only). For variable trimming, use 100 k Ω potentiometer.
Contact sales for details.