

UTS SERIES



# SOURIAU

Waterproof Plastic Connectors  
IP68 and IP69K





## Contents

### Overview

|                                         |    |
|-----------------------------------------|----|
| Typical Applications .....              | 06 |
| Features & Benefits .....               | 07 |
| Range Overview .....                    | 08 |
| Layouts .....                           | 10 |
| General Technical Characteristics ..... | 12 |

### Connector

|                                 |     |
|---------------------------------|-----|
| Overmolded Cable Assembly ..... | 16  |
| 2 contacts .....                | 20  |
| 2 + ground contacts .....       | 28  |
| 3 contacts .....                | 36  |
| 3 + ground contacts .....       | 52  |
| 4 contacts .....                | 60  |
| 5 contacts .....                | 72  |
| 6 contacts .....                | 80  |
| 6 + ground contacts .....       | 92  |
| 7 contacts .....                | 96  |
| 8 contacts .....                | 100 |
| 10 contacts .....               | 112 |
| 12 contacts .....               | 116 |
| 14 contacts .....               | 128 |
| 15 contacts .....               | 132 |
| 18 contacts .....               | 136 |
| 19 contacts .....               | 140 |
| 23 contacts .....               | 144 |
| 32 contacts .....               | 148 |
| LC (Fiber Optic) .....          | 152 |
| MPO (Fiber Optic) .....         | 156 |

### Contacts

|                                      |     |
|--------------------------------------|-----|
| Description .....                    | 162 |
| Contact Plating Selector Guide ..... | 163 |
| Contact Selector Guide .....         | 164 |
| Packaging .....                      | 164 |
| Crimp Contacts .....                 | 165 |
| #16 Coaxial Contacts .....           | 167 |
| PCB Contacts .....                   | 168 |
| Fiber Optic Contacts .....           | 170 |

### Technical Information

|                                            |     |
|--------------------------------------------|-----|
| Tooling .....                              | 174 |
| Stripping & Crimping Instructions .....    | 176 |
| Handle & Interchangeable Heads .....       | 178 |
| Insertion & Extraction Tools .....         | 179 |
| Overmolded Cable Assembly Dimensions ..... | 179 |
| Assembly Instructions .....                | 180 |
| Mated Connector Lengths .....              | 184 |
| Mating Procedure .....                     | 185 |
| Rated Current & Working Voltage .....      | 186 |
| UV Resistance .....                        | 187 |
| UL94 + UL1977 .....                        | 188 |
| IEC 61984 & IP Codes Explained .....       | 191 |
| IEC 61140 Explained .....                  | 193 |
| What is NEMA Rating ? .....                | 194 |
| Ethernet for the Layman .....              | 195 |

### Appendices

|                                            |     |
|--------------------------------------------|-----|
| #16 Coaxial Contacts/Cabling Notices ..... | 200 |
| Glossary of Terms .....                    | 207 |
| Discrimination/Keying Methods .....        | 208 |
| Part Number Index .....                    | 209 |

# UTS SERIES



# Overview

|                                           |    |
|-------------------------------------------|----|
| ■ Typical Applications .....              | 06 |
| ■ Features & Benefits .....               | 07 |
| ■ Range Overview .....                    | 08 |
| ■ Layouts .....                           | 10 |
| ■ General Technical Characteristics ..... | 12 |

## Typical Applications



Energy - Power




Off-Road - Mining - Railway



Building Automation & Control



Instrumentation - Measurement

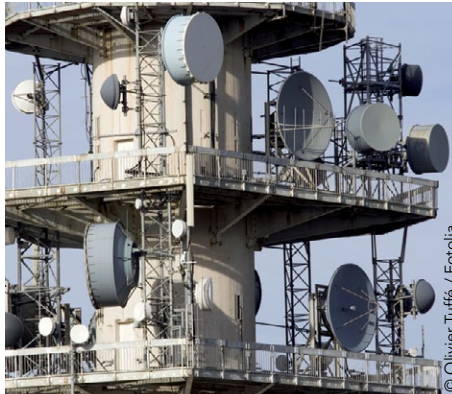

Telecom - Data infrastructure



Stage - Light

## Features & Benefits

### WATER PROOF

#### IP68/69K Dynamic Mated & Unmated

Ideal for outdoor and indoor dynamic applications requiring continuous underwater immersion, routine pressure washing and dust protection.

### UV RESISTANT

#### No Degradation Over Time

No mechanical deterioration or important color variation after 5 years of exposure in natural environment (equivalent exposure to sun and moisture as per ISO4892) and F1 rated per UL 746C.

### UL/IEC COMPLIANT

#### Qualified & Certified

In accordance with:

- UL 1977 - Certificate ECBT2, File number: E169916
- CSA C22.2 n°182.3 - Certificate ECBT8, File number: E169916.

### QUICK MATING




#### 1/3 Bayonet Coupling

With only 1/3 twist of the bayonet coupling system, connectors are mated with audible "click" and tactile feel to confirm proper mating. This mating feature eliminates connection uncertainty and reduces time and labor during installation.

### COST SAVINGS

#### Mixed Power & Signal Layouts

Power supply and signal transmission can be combined in a unique interconnect solution to reduce system complexity and minimize component and installation costs.

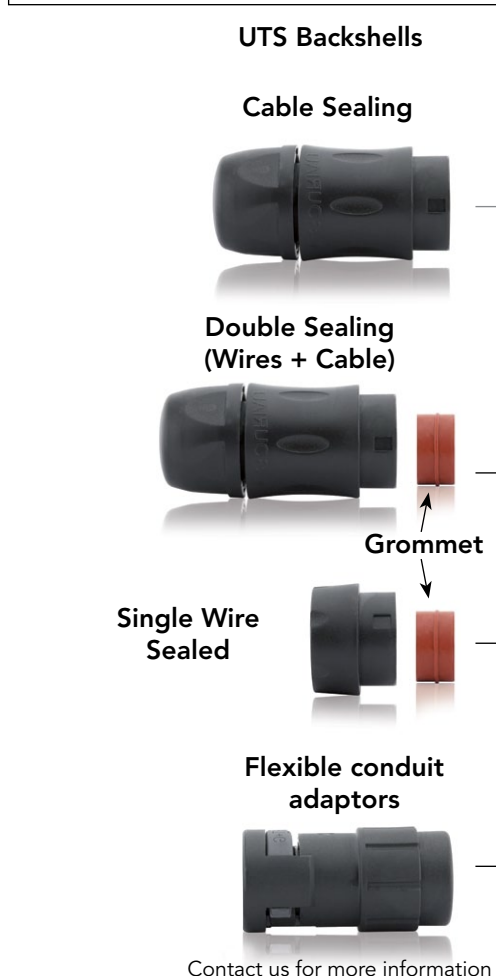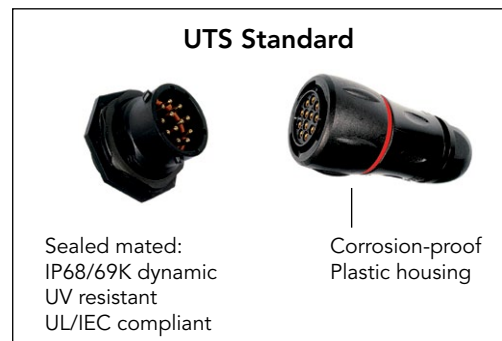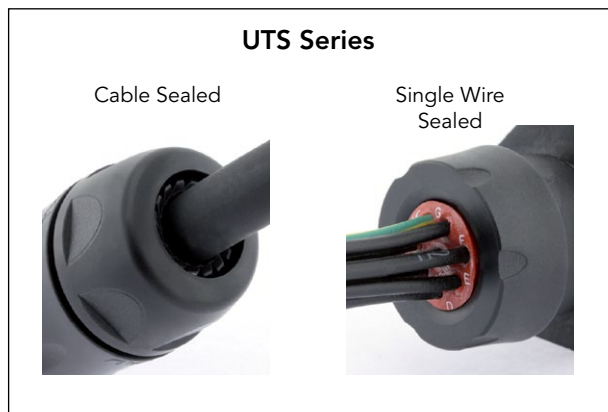

**Contacts Supplied Separately**



**Choice of Crimp Contacts**

- Machined
- Stamped and Formed
- Coaxial


**PCB Contacts**

**Fiber Optic**

**Contacts Loaded  
Screw Termination**


**Contacts Loaded  
Handsolder**

**Plug**

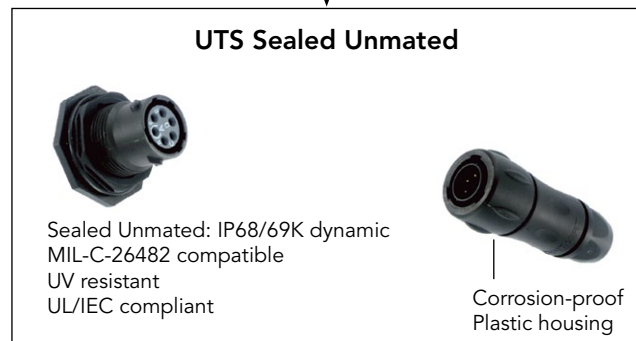

## Overview

### UTS Standard Receptacle

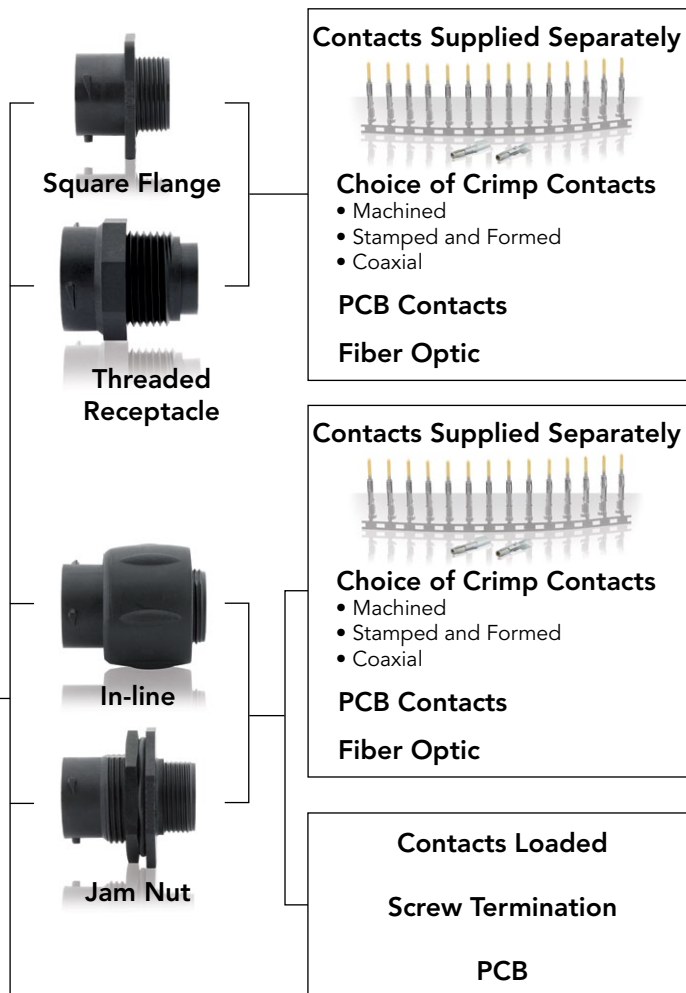

### UTS Backshells

#### Cable Sealing



#### Double Sealing (Wires + Cable)



#### Grommet




#### Single Wire Sealed

#### Flexible conduit adaptors




Contact us for more information

### UTS Sealed Unmated Receptacle

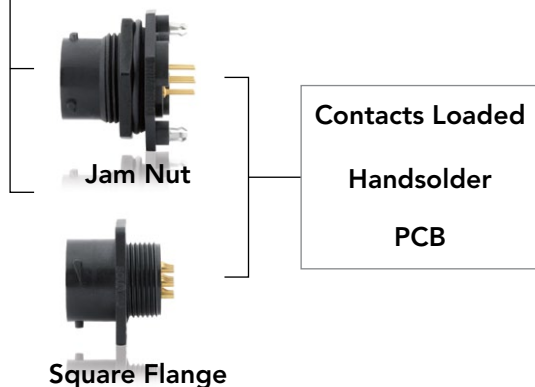

### UTS PCB Contacts

Stand-offs to allow cleaning after soldering



Metal hold down clips

- to lock the connector easily on the PCB and to release stress on solder joints
- suitable for soldering in a metallic hole








Low profile housing to limit space between panel and PCB

Pre-assembled PCB contacts

- machined or stamped versions available
- different solder tail lengths possible
- different plating options

# Layouts

(Electrical parameter according to UL1977)

| Shell Size | Contact #16 (Ø 1.6mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Contact #20 (Ø 1.0mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Contact #8 (Ø 3.6mm) | Hybrid & others                                                                                                                                                                                                                                                                                                                                                                 |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 8          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <p><b>8E2/8D2<sup>(1)</sup></b><br/>7A 250V<br/>2 contacts<br/><br/>Page 20</p> <p><b>8E3/8D3<sup>(1)</sup></b><br/>7A 250V<br/>3 contacts<br/><br/>Page 36</p> <p><b>8E3A/8D3A<sup>(1)</sup></b><br/>7A 250V<br/>3 contacts<br/><br/>Page 40</p> <p><b>8E98/8D98<sup>(1)</sup></b><br/>7A 250V<br/>3 contacts<br/><br/>Page 40</p> <p><b>8E33/8D33<sup>(1)</sup></b><br/>7A 250V<br/>3 contacts<br/><br/>Page 44</p> <p><b>8E4*/8D4*<sup>(1)</sup></b><br/>7A 250V<br/>4 contacts<br/><br/>Page 60</p> |                      |                                                                                                                                                                                                                                                                                                                                                                                 |
| 10         | <p><b>103</b><br/>10A 500V<br/>2+ground<br/><br/>Page 28</p> <p><b>104*<sup>(3)</sup></b><br/>10A 500V<br/>4 contacts<br/><br/>Page 68</p>                                                                                                                                                                                                                                                                                                                                                        | <p><b>106*</b><br/><b>10E6*<sup>(1)</sup>/10D6*</b><br/>6A 250V<br/>6 contacts<br/><br/>Page 84</p> <p><b>10E98/10D98</b><br/>6A 250V<br/>6 contacts<br/><br/>Page 88</p> <p><b>10E7<sup>(1)</sup>/10D7</b><br/>6A 250V<br/>7 contacts<br/><br/>Page 96</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                      | <p><b>102W2</b><br/>20A 500V<br/>4 contacts<br/>2xØ2.4 (#12)<br/>2xØ1.0 (#20)<br/><br/>Page 64</p> <p><b>103W3</b><br/>10A 500V<br/>6 contacts<br/>3xØ1.6 (#16)<br/>3xØ1.0 (#20)<br/><br/>Page 80</p> |
| 12         | <p><b>12E2/12D2</b><br/>13A 650V<br/>2 contacts<br/><br/>Page 24</p> <p><b>12E3/12D3</b><br/>13A 600V<br/>3 contacts<br/><br/>Page 48</p> <p><b>124<sup>(4)</sup></b><br/><b>12E4/12D4</b><br/>10A 500V<br/>3+ground<br/><br/>Page 52</p> <p><b>128<sup>(1) (3)</sup></b><br/>10A 500V<br/>8 contacts<br/><br/>Page 100</p> | <p><b>1210*</b><br/><b>12E10*/12D10*</b><br/>5A 250V<br/>10 contacts<br/><br/>Page 112</p> <p><b>12E8/12D8</b><br/>4.5A 250V<br/>8 contacts<br/><br/>Page 104</p> <p><b>12E14/12D14</b><br/>4.5A 250V<br/>14 contacts<br/><br/>Page 128</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                      |                                                                                                                                                                                                                                                                                                                                                                                 |

1: M12, M16 and M20 threaded receptacle available

2: NPT available

3: Discrete wire grommet option

4: Screw termination contacts

\* Ethernet compatible: see pages 195 &amp; 196



















Contacts #20:  
from AWG 26 to 18  
0.13 to 0.93 mm<sup>2</sup>

Contacts #16:  
from AWG 30 to 14  
0.05 to 2.5 mm<sup>2</sup>

Contacts #12:  
from AWG 22 to 12  
0.13 to 4 mm<sup>2</sup>

Contacts #8:  
from AWG 16 to 8  
1.5 to 10 mm<sup>2</sup>

| Shell Size | Contact #16 (Ø 1.6mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Contact #20 (Ø 1.0mm)                                                                                                                                                                                                                                                                                                           | Contact #8 (Ø 3.6mm)                                                                                                                                            | Hybrid & others                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 14         | <p><b>14E5/14D5</b><br/>12A 600V<br/>5 contacts</p>  <p>Page 72</p> <p><b>147<sup>(3)</sup>/14D7</b><br/>10A 500V<br/>6+ground</p>  <p>Page 92</p> <p><b>1412<sup>(3)</sup></b><br/>10A 500V<br/>12 contacts</p>  <p>Page 116</p> <p><b>1492<sup>(3)</sup></b><br/>10A 600V<br/>12 contacts</p>  <p>Page 124</p> | <p><b>14E18/14D18</b><br/>4A 250V<br/>18 contacts</p>  <p>Page 136</p> <p><b>1419</b><br/><b>14E19/14D19</b><br/>5A 250V<br/>19 contacts</p>  <p>Page 140</p> | <p><b>142G1<sup>(2)</sup></b><br/>44A 600V<br/>2+ground</p>  <p>Page 32</p>   | <p><b>148</b><br/>25A 250V<br/>8 contacts<br/>4xØ1.6 (#16)+4xØ2.4 (#12)</p>  <p>Page 108</p> <p><b>14E12/14D12</b><br/>4.5A 250V<br/>12 contacts<br/>4xØ1.6 (#16)+8xØ1.0 (#20)</p>  <p>Page 120</p> <p><b>14E15/14D15</b><br/>12A 600V<br/>15 contacts<br/>1xØ1.6 (#16)+14xØ1.0 (#20)</p>  <p>Page 132</p> |
| 18         | <p><b>1823</b><br/>10A 500V<br/>23 contacts</p>  <p>Page 144</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p><b>1832</b><br/><b>18E32</b><br/>5A 250V<br/>32 contacts</p>  <p>Page 148</p>                                                                                                                                                             | <p><b>183G1<sup>(2)</sup></b><br/>44A 600V<br/>3+ground</p>  <p>Page 56</p> | <p><b>18X2M3<sup>(2)</sup></b><br/>44A 600V<br/>5 contacts<br/>3xØ1.6 (#16) + 2xØ3.6 (#8)</p>  <p>Page 76</p> <p><b>LC</b><br/><b>SOURIAU</b><br/><b>UTS-LC</b></p>  <p>Page 156</p> <p><b>MPO</b><br/><b>SOURIAU</b><br/><b>UTS-MPO</b></p>  <p>Page 160</p>                                          |

XXXXXX blue highlighted items: UTS Sealed in Unmated Condition

## General Technical Characteristics



### Materials

- **Body connector + Backshell:** Thermoplastic
- **Insert:**
  - UTS Standard, UTS Single Wire Sealed, UTS Screw Termination Contacts: Thermoplastic
  - UTS Sealed Unmated Handsolder & UTS Sealed Unmated with PC Tails Contacts: Elastomer
- **Nut:** Metal
- **Contacts:** See page 161
- **Halogen free**
- **RoHS compliant & conforms to the Chinese standard SJ/T1166-2006 (Chinese RoHS equivalent)**



### Environmental

- **Operating temperature:**
  - from -40°C to +105°C
  - 40/100/21 per NFF 61-030
- **Flammability rating:**
  - UL94 V-0 (all UTS except the Sealed Unmated version) see page 188
  - UL94 HB (UTS Sealed Unmated version only) see page 188
  - I2F3 according to NFF 16101 & NFF 16102
- **Salt spray:**
  - ≥500 hours per EIA-026A
- **UV resistant:**
  - No mechanical degradation or important color variation after 5 years of exposure in natural environment (equivalent exposure to sun and moisture as per ISO 4892) and F1 rated per UL 746C
- **Sealing:**
  - UTS Standard: IP68/IP69K dynamic (mated)
  - UTS Sealed Unmated version: IP68/IP69K dynamic (unmated)
  - UTS Single Wire Sealed: IP67/69K (up to IP68 with double sealing backshell)
  - UTS Screw Termination Contacts: IP68/IP69K dynamic (mated)
  - Note: IP68=10 m underwater during 1 week
- **Fluid resistance:**
  - Gas and Oil
  - Mineral Oil
  - Acid Bath
  - Basic Bath

### Electrical

- **In accordance with:**
  - UL 1977: Certificate ECBT2  
File number: E169916
  - CSA C22.2 n°182.3: Certificate ECBT8  
File number: E169916



- Also see pages 10 & 11

### Optical

- Please consult us for more information about UTSLC and UTSMP0

### Mechanical

- **Durability:**
  - 250 matings & unmatings per MIL-C-26482
- **Vibration resistance (all UTS versions except UTS Screw Termination contacts):**
  - Sinusoidal vibrations per IEC 60512-4 - from 10 to 2000 Hz
- **Thermal shock:**
  - 5 cycles 30 min. from -40°C to 105°C per MIL-STD-1344 method 1003



## Notes

# UTS SERIES

## UTS Series

# Connector

|                                     |     |
|-------------------------------------|-----|
| ■ Overmolded Cable Assembly .....   | 16  |
| ■ 2 contacts                        |     |
| 8E2/8D2: 7A 250V.....               | 20  |
| 12E2/12D2: 13A 650V.....            | 24  |
| ■ 2 contacts + ground               |     |
| 103: 10A 500V.....                  | 28  |
| 142G1: 44A 600V.....                | 32  |
| ■ 3 contacts                        |     |
| 8E3/8D3: 7A 250V.....               | 36  |
| 8E3A/8D3A - 8E98/8D98: 7A 250V..... | 40  |
| 8E33/8D33: 7A 250V.....             | 44  |
| 12E3/12D3: 13A 600V.....            | 48  |
| ■ 3 contacts + ground               |     |
| 124 - 12E4/12D4: 10A 500V.....      | 52  |
| 183G1: 44A 600V.....                | 56  |
| ■ 4 contacts                        |     |
| 8E4/8D4*: 7A 250V.....              | 60  |
| 102W2: 20A 500V.....                | 64  |
| 104*: 10A 500V.....                 | 68  |
| ■ 5 contacts                        |     |
| 14E5/14D5: 12A 600V.....            | 72  |
| 18X2M3: 44A 600V.....               | 76  |
| ■ 6 contacts                        |     |
| 103W3: 10A 500V.....                | 80  |
| 106* - 10E6*/10D6*: 6A 250V.....    | 84  |
| 10E98/10D98: 6A 250V.....           | 88  |
| ■ 6 contacts + ground               |     |
| 147 - 14E7/14D7: 10A 500V.....      | 92  |
| ■ 7 contacts                        |     |
| 10E7/10D7: 6A 250V.....             | 96  |
| ■ 8 contacts                        |     |
| 128: 10A 500V.....                  | 100 |
| 12E8/12D8: 4.5A 250V.....           | 104 |
| 148: 25A 250V.....                  | 108 |
| ■ 10 contacts                       |     |
| 1210* - 12E10*/12D10*: 5A 250V..... | 112 |
| ■ 12 contacts                       |     |
| 1412: 10A 500V.....                 | 116 |
| 14E12/14D12: 4.5A 250V.....         | 120 |
| 1492: 10A 600V.....                 | 124 |
| ■ 14 contacts                       |     |
| 12E14/12D14: 4.5A 250V.....         | 128 |
| ■ 15 contacts                       |     |
| 14E15/14D15: 12A 600V.....          | 132 |
| ■ 18 contacts                       |     |
| 14E18/14D18: 4A 250V.....           | 136 |
| ■ 19 contacts                       |     |
| 1419 - 14E19/14D19: 5A 250V.....    | 140 |
| ■ 23 contacts                       |     |
| 1823: 10A 500V.....                 | 144 |
| ■ 32 contacts                       |     |
| 1832 - 18E32: 5A 250V.....          | 148 |
| ■ LC .....                          | 156 |
| ■ MPO .....                         | 160 |

Electrical parameters according to UL


\* Ethernet compatible see pages 195 & 199

## Overmolded Cable Assembly


SOURIAU has provided connectors for various applications for more than 90 years and has been used in the most extreme environments. Conscious about the difficulty in finding a quick and reliable harness manufacturer, we began our own in-house cable assembly production. It allows customers to reduce the number of suppliers and to take advantage of the “best in class” quality of the SOURIAU group. Overmolding is a process that further enhances the sealing properties and helps to minimize stress on the cable termination to the connector. In addition, the wires are encapsulated inside the molding which creates a barrier preventing liquid/moisture from entering the equipment through the connector or cable jacket if breached.



### How to choose the outer jacket material

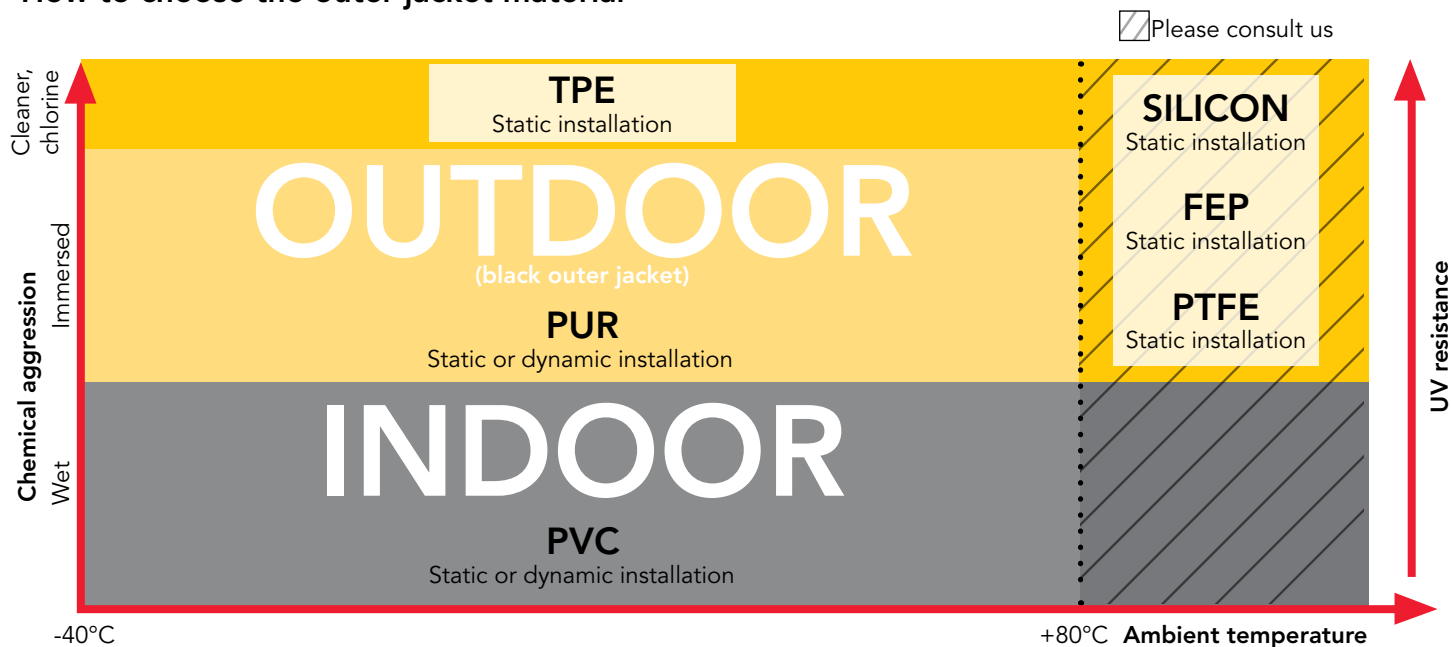


## Overmolding Description

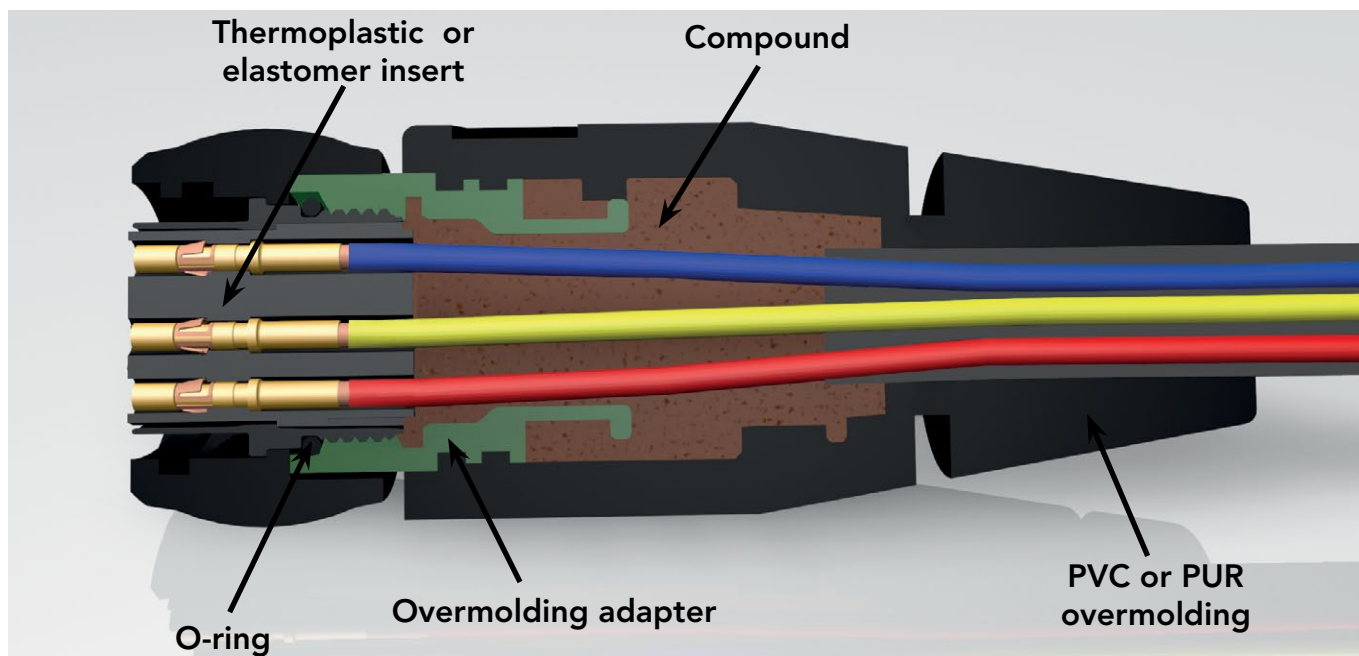

### Connector with cable gland backshell


GOOD

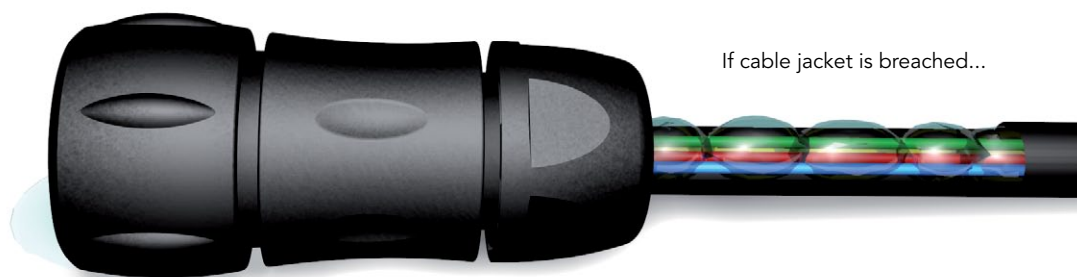

...water ingress unhampered, leading to damage.

### Overmolded connector

BEST

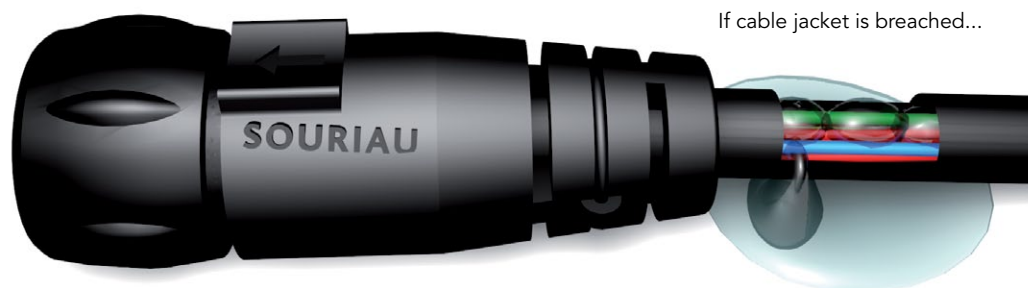

...prevents water ingress via capillary action.

## UTS Waterproof Plastic Overmold



### Description

#### Cable

- PVC Jacket (Black)
- 16 AWG conductors
- Multi-conductor 4, 8 or 12
- 300V
- Unshielded
- Flammability rating UL 1685 (UL1581 Sec.1160)

#### Applications

- Industrial Controls
- Electronics
- Controlled Environment Equipment
- LED Lighting

## Overmolding Specifications

| PLATING    | SALT SPRAY | TEMPERATURE*      | WATERPROOF*                | MECHANICAL            |
|------------|------------|-------------------|----------------------------|-----------------------|
| No plating | 500 H      | -30°C up to +50°C | IP68/IP69K dynamic (mated) | 250 matings/unmatings |

\* With appropriate cable and overmolding

## Example of Customized Cable Assemblies



Overmolding on Curly Cable



Overmolding with Double Ends



Harness for PCB Connection

To define your customized cable assembly needs, please contact our Technical Service Team for support.

## Cable Information

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| <b>Range of temperature:</b> | -30°C +50°C                                                        |
| <b>Rated voltage:</b>        | U0/U: 300/500V                                                     |
| <b>Wire section :</b>        | Layouts with #16 contact: wire section 1.5 mm <sup>2</sup> / 16AWG |
| <b>Harmonized reference:</b> | H05 VV - F XX                                                      |

## Standardization of American Cable

### Nomenclature Key


|              |                                                                                               |
|--------------|-----------------------------------------------------------------------------------------------|
| <b>S:</b>    | Service Grade (also means extra hard service when not followed by J, V, or P)                 |
| <b>J:</b>    | Hard Service                                                                                  |
| <b>V:</b>    | Vacuum cleaner cord (also light duty cable)                                                   |
| <b>P:</b>    | Parallel cord (also known as zip cord) – Always light duty                                    |
| <b>E:</b>    | Thermoplastic Elastomer (UL/NEC designation ONLY)                                             |
| <b>O:</b>    | Oil Resistant outer jacket                                                                    |
| <b>OO:</b>   | Oil Resistant outer jacket and insulation                                                     |
| <b>T:</b>    | Thermoplastic                                                                                 |
| <b>W:</b>    | Outdoor-includes sunlight resistant jacket and wet location rated conductors (formerly "W-A") |
| <b>H:</b>    | Heater cable                                                                                  |
| <b>VW-1:</b> | Flame retardant (vertical grade)                                                              |
| <b>FT2:</b>  | Flame retardant (horizontal grade)                                                            |

### Definitions of Cable Types

|               |                                                                                                               |
|---------------|---------------------------------------------------------------------------------------------------------------|
| <b>SVT:</b>   | Thermoplastic insulated vacuum cleaner cord, with or without 3rd conductor for grounding purposes; 300V (PVC) |
| <b>SJT:</b>   | Junior hard service, thermoplastic insulated conductors and jacket. 300V (PVC)                                |
| <b>SJTW:</b>  | Same as SJT except outdoor rated. (PVC)                                                                       |
| <b>SJTO:</b>  | Same as SJT but oil resistant outer jacket. (PVC)                                                             |
| <b>SJTOW:</b> | Same as SJTO except outdoor rated. (PVC)                                                                      |
| <b>ST:</b>    | Hard service cord with all thermoplastic construction, 600V (PVC)                                             |
| <b>STW:</b>   | Same as ST except outdoor rated. (PVC)                                                                        |
| <b>STO:</b>   | Same as ST but with oil resistant outer jacket. (PVC)                                                         |
| <b>STOW:</b>  | Same as STO except outdoor rated. (PVC)                                                                       |



## 8E2/8D2 (Shell size 8, 2x#20)

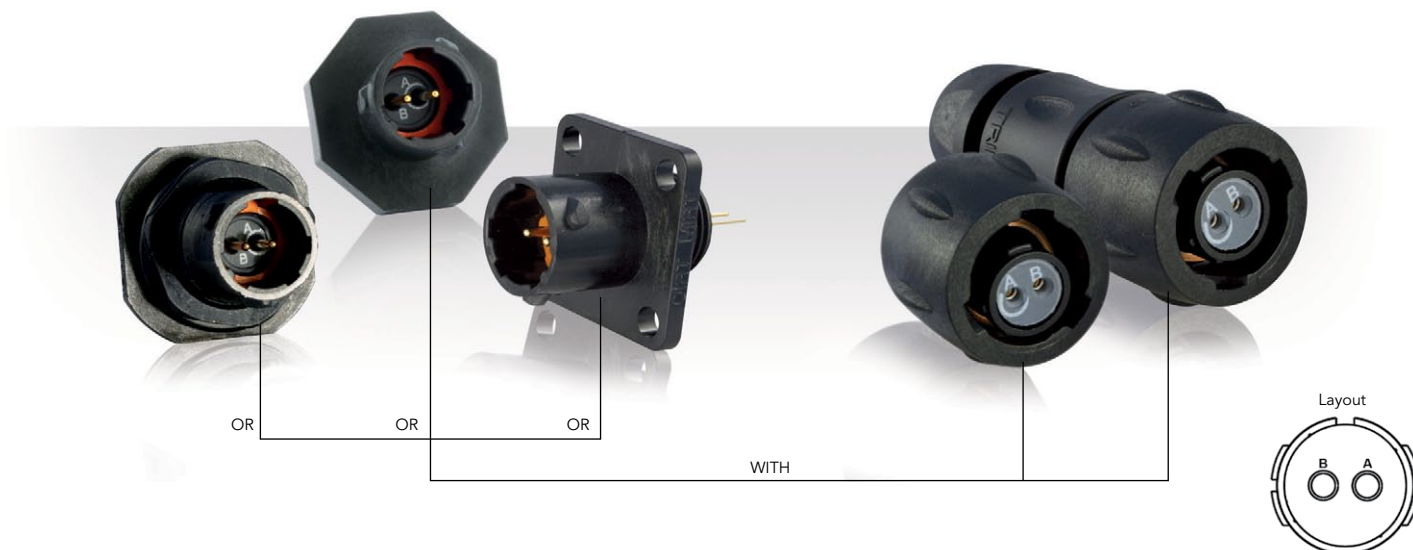

## Connector Part Numbers

| Contact type                                         | Connector type                                                | Backshell            | Part number        |                    |
|------------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                      |                                                               |                      | Male insert        | Female insert      |
| Handsolder electrical contacts loaded<br>see page 23 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS08E2P</b>    | <b>UTS08E2S</b>    |
|                                                      | Plug                                                          | Without (Fig. 7)     | <b>UTS68E2P</b>    | <b>UTS68E2S</b>    |
|                                                      |                                                               | Cable gland (Fig. 8) | <b>UTS6JC8E2P</b>  | <b>UTS6JC8E2S</b>  |
|                                                      | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS78E2P</b>    | <b>UTS78E2S</b>    |
| PCB contacts loaded<br>see page 23                   | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78E2PM12</b> | <b>UTS78E2SM12</b> |
|                                                      | Square flange receptacle                                      | Without (Fig. 2)     | <b>UTS08D2P</b>    | <b>UTS08D2S</b>    |
|                                                      | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS78D2P32</b>  | <b>UTS78D2S32</b>  |
|                                                      | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS78D2P</b>    | <b>UTS78D2S</b>    |
|                                                      | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78D2PM12</b> | <b>UTS78D2SM12</b> |








Possibilities of discrimination/keying methods see page 208

Sealed unmated

## 8E2/8D2 (Shell size 8, 2x#20)

2

### Dimensions

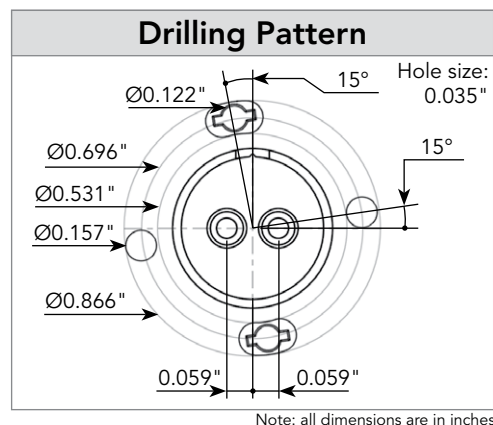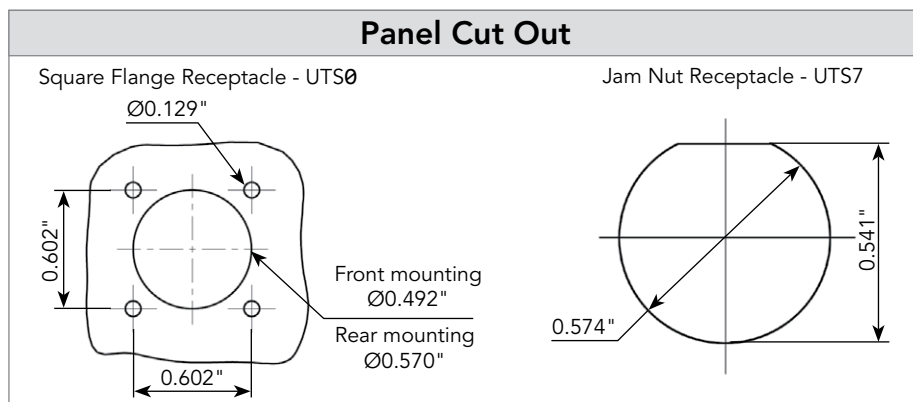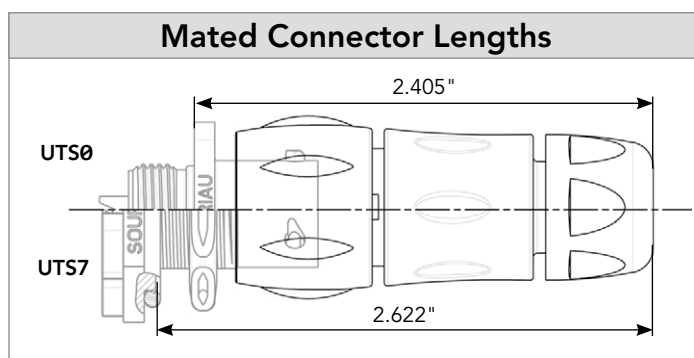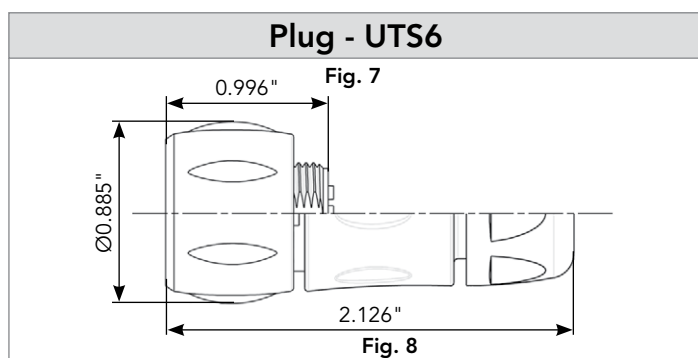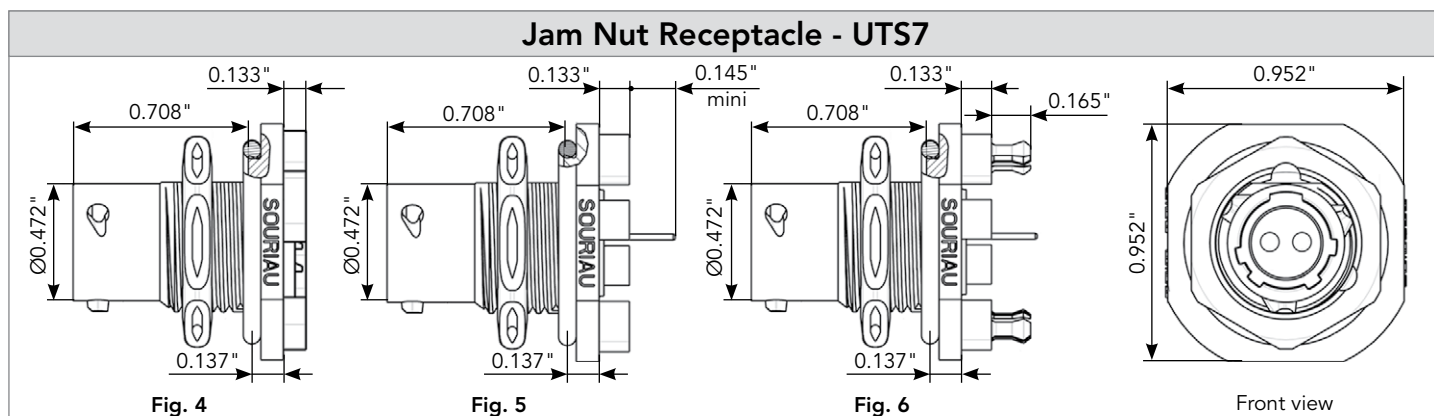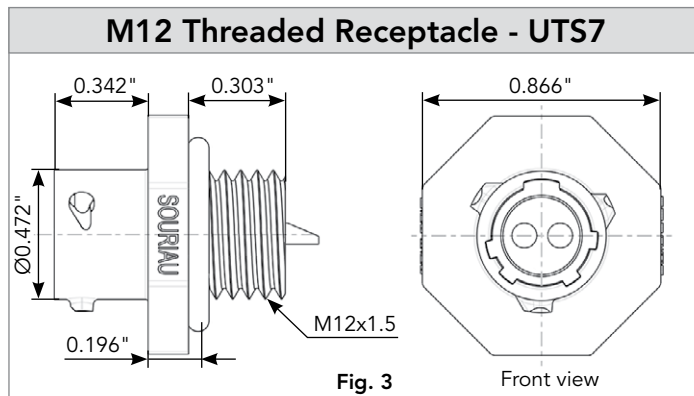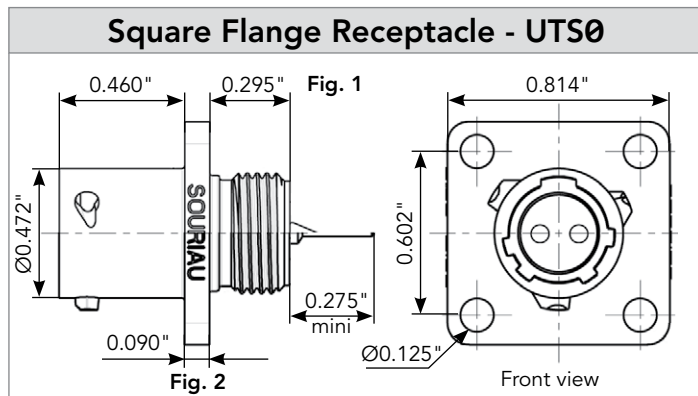

## 8E2/8D2 (Shell size 8, 2x#20)

### Accessories

#### Jam Nut or M12 Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS8DCG



IP68/69K

Metal terminal

Part number

UTS8DCGR

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS8DCGE

#### Plug Protective Cap



IP40

Part number

UTS68C

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005585A

Plug cap

85005594

#### Gasket



IP68/69K

Part numbers

UTFD11B

#### Color Coding Rings

G for Green



Y for  
Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS78CCRR

UTS68CCRR

UTS78CCRY

UTS68CCRY

UTS78CCRG

UTS68CCRG

## 8E2/8D2 (Shell size 8, 2x#20)

2

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
7A 250V UL94 HB


**CSA**  
7A 250V UL94 HB

**IEC**  
7A 32V 1.5kV 3

#### UTS 8E2/8D2 Derating Curves

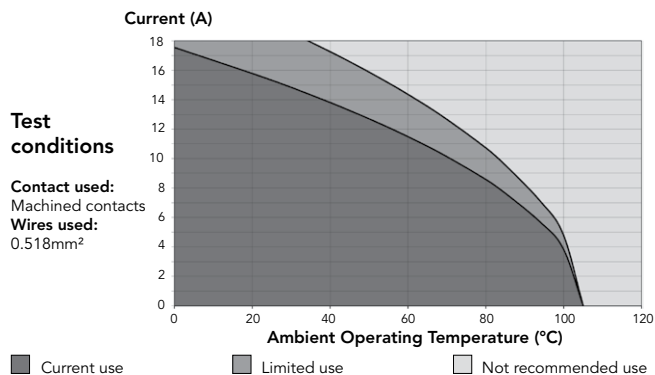

## 12E2/12D2 (Shell size 12, 2x#16)

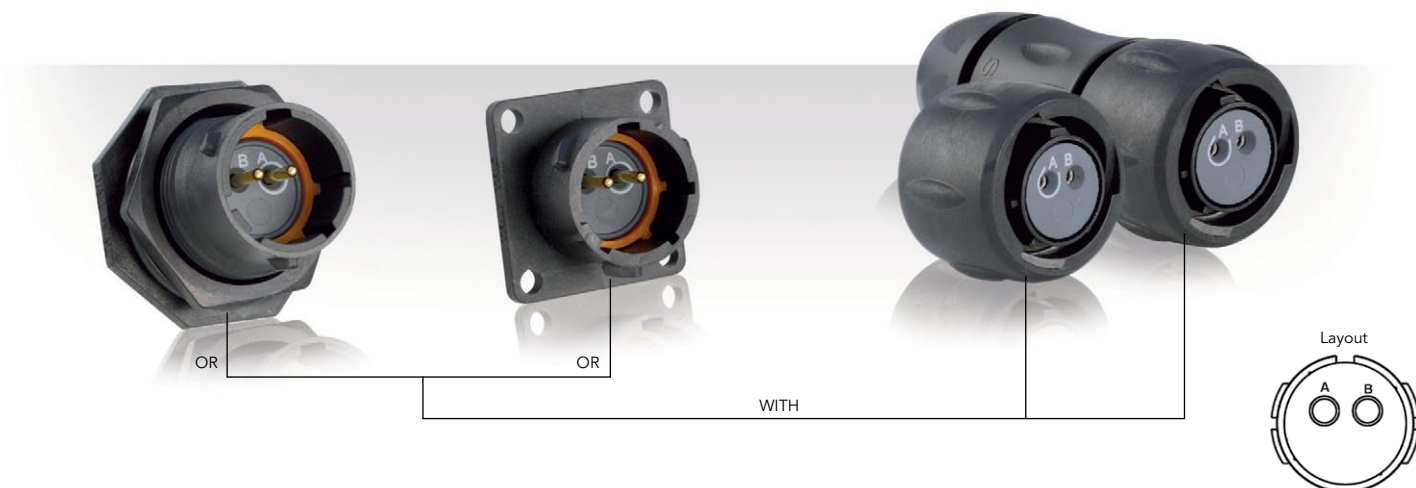

## Connector Part Numbers

| Contact type                                         | Connector type                                                | Backshell            | Part number        |                    |
|------------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                      |                                                               |                      | Male insert        | Female insert      |
| Handsolder electrical contacts loaded<br>see page 27 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS012E2P</b>   | <b>UTS012E2S</b>   |
|                                                      | Plug                                                          | Without (Fig. 6)     | <b>UTS612E2P</b>   | <b>UTS612E2S</b>   |
|                                                      |                                                               | Cable gland (Fig. 7) | <b>UTS6JC12E2P</b> | <b>UTS6JC12E2S</b> |
|                                                      | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS712E2P</b>   | <b>UTS712E2S</b>   |
| PCB contacts loaded<br>see page 27                   | Square flange receptacle                                      | Without (Fig. 2)     | <b>UTS012D2P</b>   | <b>UTS012D2S</b>   |
|                                                      | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 5)     | <b>UTS712D2P32</b> | <b>UTS712D2S32</b> |
|                                                      | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 4)     | <b>UTS712D2P</b>   | <b>UTS712D2S</b>   |

Sealed unmated

# 12E2/12D2 (Shell size 12, 2x#16)

2

## Dimensions

### Square Flange Receptacle - UTS0




Fig. 1





Fig. 2

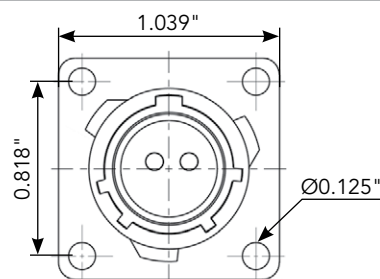

Front view

### Jam Nut Receptacle - UTS7




Fig. 3




Fig. 4





Fig. 5



Front view

### Plug - UTS6


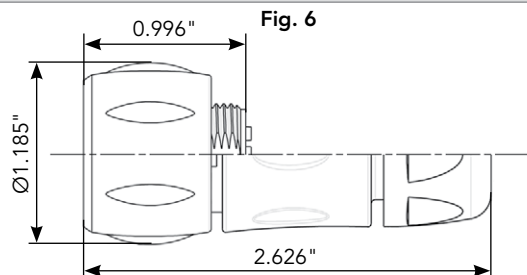



Fig. 7

### Mated Connector Lengths

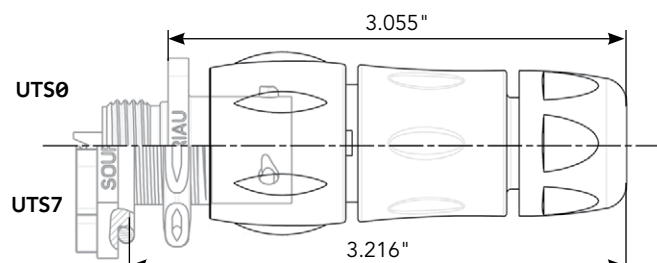


### Panel Cut Out


Square Flange Receptacle - UTS0

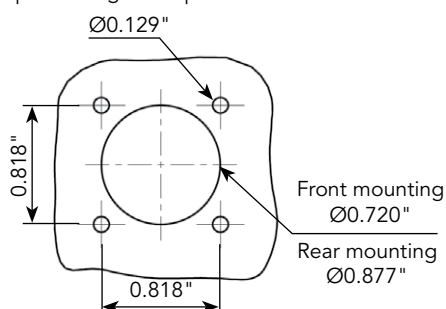

Jam Nut Receptacle - UTS7



### Drilling Pattern

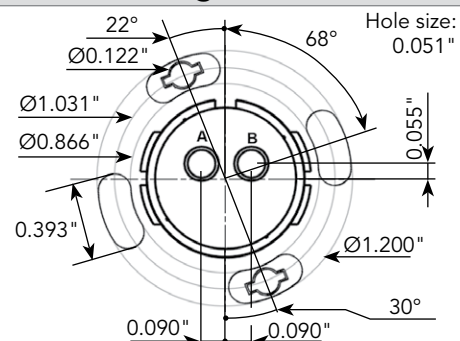

Note: all dimensions are in inches

## 12E2/12D2 (Shell size 12, 2x#16)

### Accessories

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS12DCG



IP68/69K

Metal terminal

Part number

UTS12DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS612DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS12DCGE

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005587A

Plug cap

85005596

#### Gasket



IP68/69K

Part numbers

UTFD13B

#### Color Coding Rings

G for Green



Y for  
Yellow



R for Red



Part numbers

Receptacles

UTS712CCRR

UTS712CCRY

UTS712CCRG

Plugs

UTS612CCRR

UTS612CCRY

UTS612CCRG



# 12E2/12D2 (Shell size 12, 2x#16)

2

## Contacts

| #16        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 18 to 14               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


### Electrical Characteristics

**UL**  
13A 650V UL94 HB


**CSA**  
13A 600V UL94 HB

**IEC**  
16A 150V 2.5kV 3

### UTS 12E2/12D2 Derating Curves

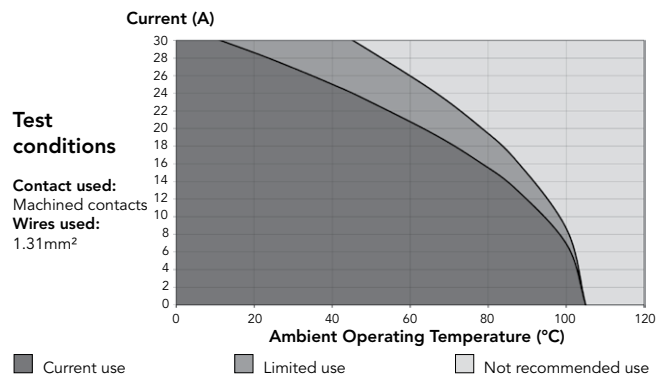

# 103 (Shell size 10, 2 + ground, 3x#16)

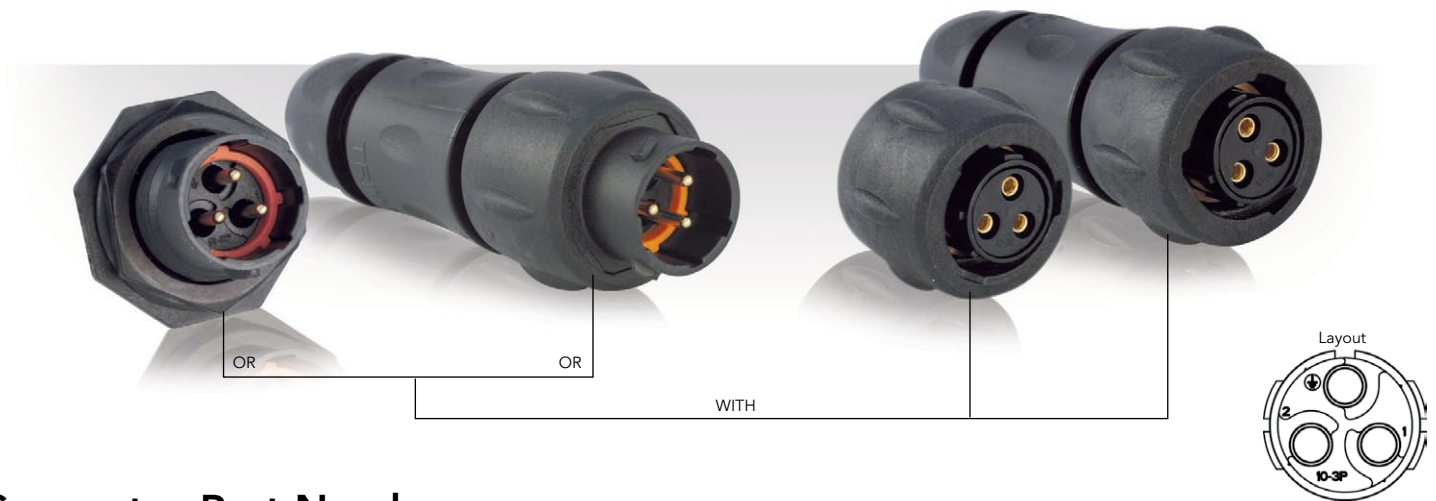

## Connector Part Numbers

| Contact type                                   | Connector type          | Backshell            | Part number       |                   |
|------------------------------------------------|-------------------------|----------------------|-------------------|-------------------|
|                                                |                         |                      | Male insert       | Female insert     |
| Crimp contacts supplied separately see page 31 | Free hanging receptacle | Cable gland (Fig. 1) | <b>UTS1JC103P</b> | <b>UTS1JC103S</b> |
|                                                | Plug                    | Without (Fig. 2)     | <b>UTS6103P</b>   | <b>UTS6103S</b>   |
|                                                |                         | Cable gland (Fig. 3) | <b>UTS6JC103P</b> | <b>UTS6JC103S</b> |
|                                                | Jam nut receptacle      | Without (Fig. 4)     | <b>UTS7103P</b>   | <b>UTS7103S</b>   |
| PCB contacts supplied separately see page 31   | Jam nut receptacle      | Without (Fig. 4)     | <b>UTS7103P</b>   | <b>UTS7103S</b>   |

# 103 (Shell size 10, 2 + ground, 3x#16)

## Dimensions



### Free Hanging - UTS1

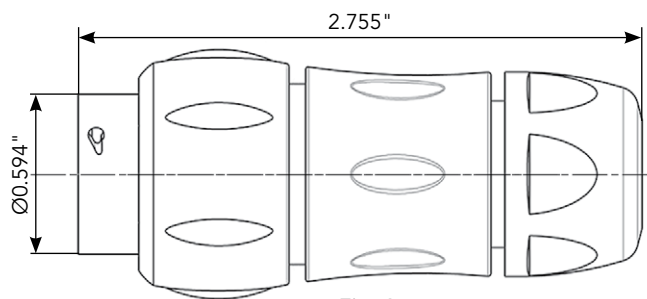


Fig. 1

### Plug - UTS6




Fig. 2

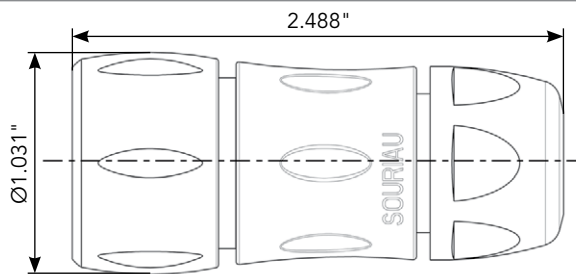


Fig. 3

### Jam Nut Receptacle - UTS7


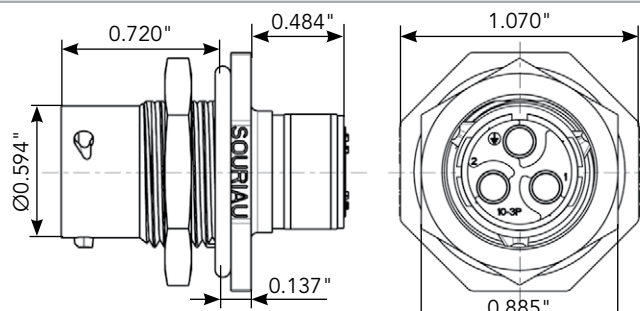



Fig. 4

### Mated Connector Length - UTS7

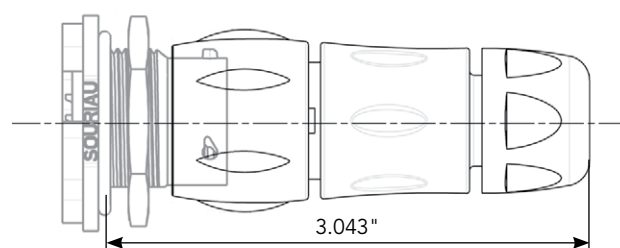


### Panel Cut Out

Jam Nut Receptacle - UTS7

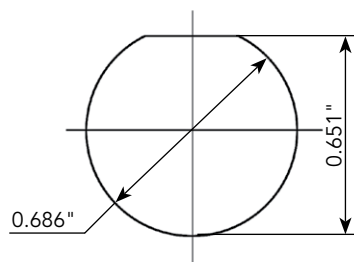

### Drilling Pattern

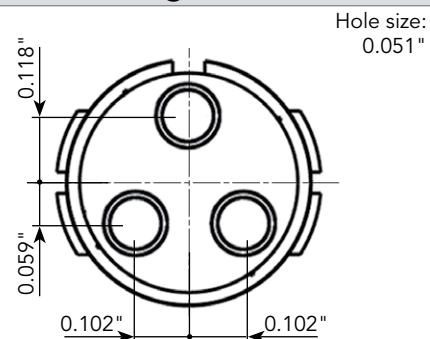

Note: all dimensions are in inches

103 (Shell size 10, 2 + ground, 3x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

### Dummy Contact #16



Part number / Polyamide 6.6  
SMSPK00

See page 212 for more information

### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + yorK090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see page 164

\* Heads to be used with handle PN: SHANGLES

### Plastic Protective Cap



Part numbers


| Receptacle cap | Plug cap |
|----------------|----------|
| 85005586A      | 85005595 |

### Extraction Tool #16



Part number  
RX2025GE1

### Color Coding Rings



| Part numbers |            |
|--------------|------------|
| Receptacles  | Plugs      |
| UTS710CCRR   | UTS610CCRR |
| UTS710CCRY   | UTS610CCRY |
| UTS710CCRG   | UTS610CCRG |



Handle



Head



Complete set

# 103 (Shell size 10, 2 + ground, 3x#16)

## Contacts



| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021 "    | 0.039 "         |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031 "    | 0.062 "         |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045 "    | 0.070 "         |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045 "    | 0.086 "         |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070 "    | 0.125 "         |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090 "    | 0.125 "         |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035 "-0.062 " |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047 "-0.082 " |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125 "         |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118 "         |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125 "         |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

(3): For dimensions see page 172

Note: all dimensions are in inches


## Electrical Characteristics

UL  
10A 500V UL94 V-0

CSA  
7A 500V UL94 V-0

IEC  
16A 300V 4kV 3  
Temperature elevation: 50°C

## UTS 103 Derating Curves

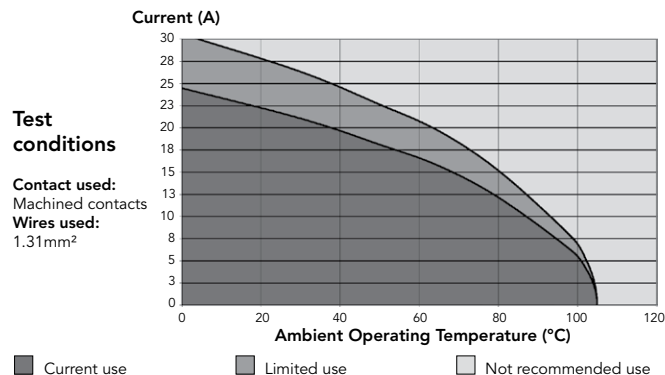

## 142G1 (Shell size 14, 2 + ground, 3x#8)











## Connector Part Numbers

| Contact type                                   | Connector type                        | Backshell            | Part number         |                         |
|------------------------------------------------|---------------------------------------|----------------------|---------------------|-------------------------|
|                                                |                                       |                      | Male insert         | Female insert           |
| Crimp contacts supplied separately see page 35 | Square flange receptacle              | Without (Fig. 1)     | <b>UTS0142G1P</b>   | -                       |
|                                                | Free hanging receptacle               | Cable gland (Fig. 6) | <b>UTS1JC142G1P</b> | <b>UTS1JC142G1S</b>     |
|                                                | Plug                                  | Without (Fig. 3)     | <b>UTS6142G1P</b>   | <b>UTS6142G1S</b>       |
|                                                |                                       | Cable gland (Fig. 4) | <b>UTS6JC142G1P</b> | <b>UTS6JC142G1S</b>     |
|                                                | Jam nut receptacle                    | Without (Fig. 2)     | <b>UTS7142G1P</b>   | <b>UTS7142G1S</b>       |
|                                                | NPT 1/2" threaded receptacle          | Without (Fig. 5)     | -                   | <b>UTS7142G1SNPT</b>    |
| PCB contacts supplied separately see page 35   | Square flange receptacle              | Without (Fig. 1)     | <b>UTS0142G1P</b>   | -                       |
|                                                | Jam nut receptacle                    | Without (Fig. 2)     | <b>UTS7142G1P</b>   | <b>UTS7142G1S</b>       |
|                                                | NPT 1/2" threaded receptacle          | Without (Fig. 5)     | -                   | <b>UTS7142G1SNPT</b>    |
|                                                | NPT 1/2" threaded receptacle with nut | Without (Fig. 5)     | -                   | <b>UTS7142G1SNPTNUT</b> |

# 142G1 (Shell size 14, 2 + ground, 3x#8)

## Dimensions

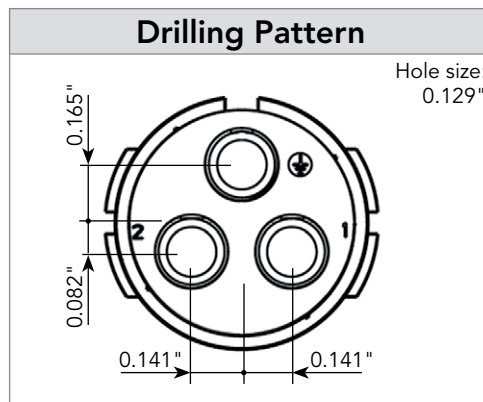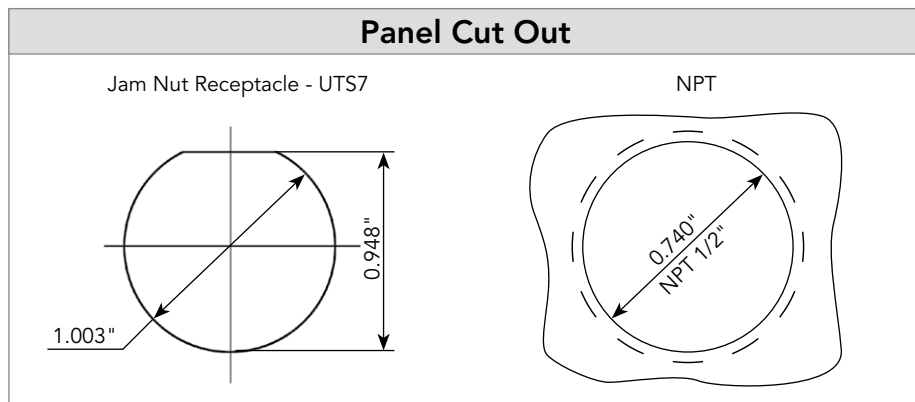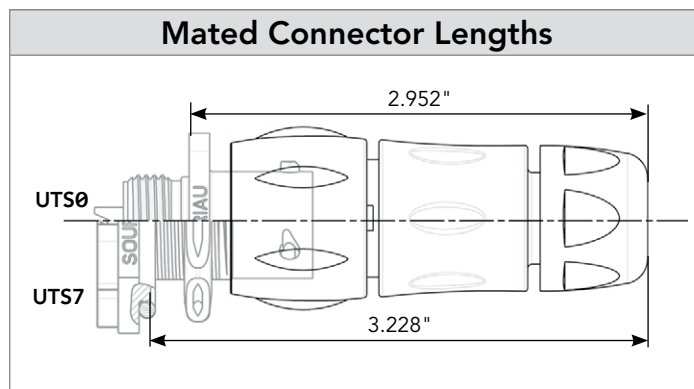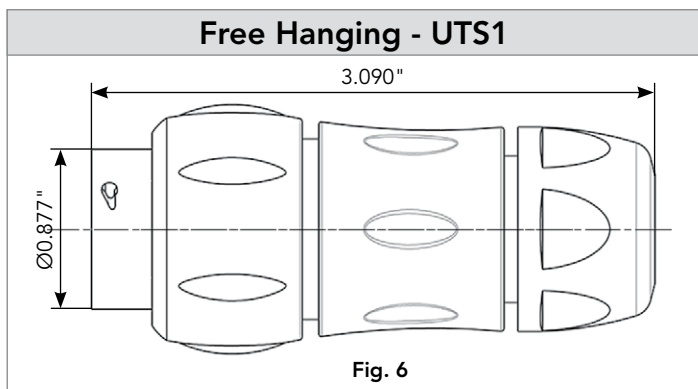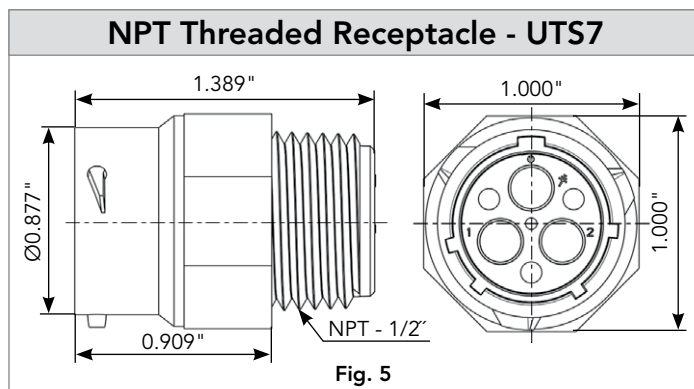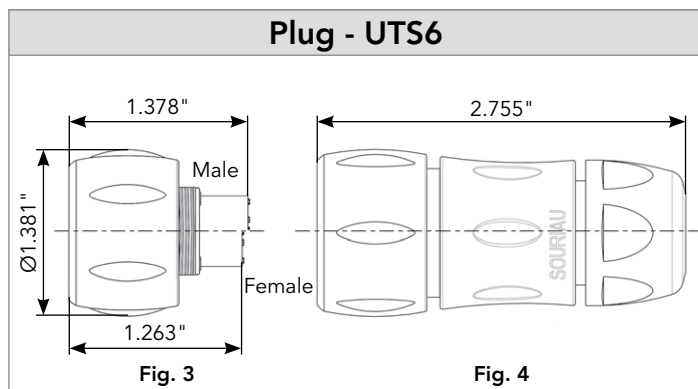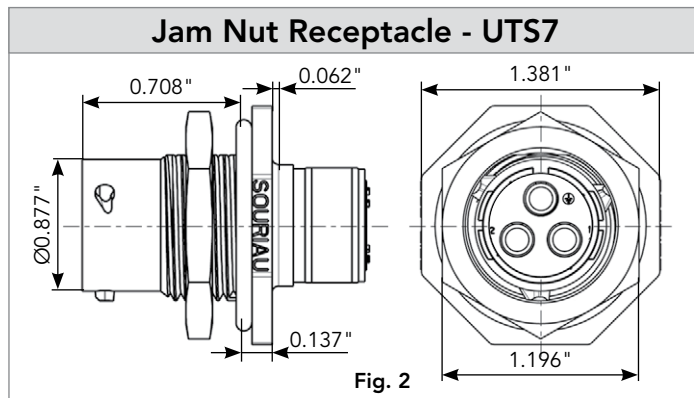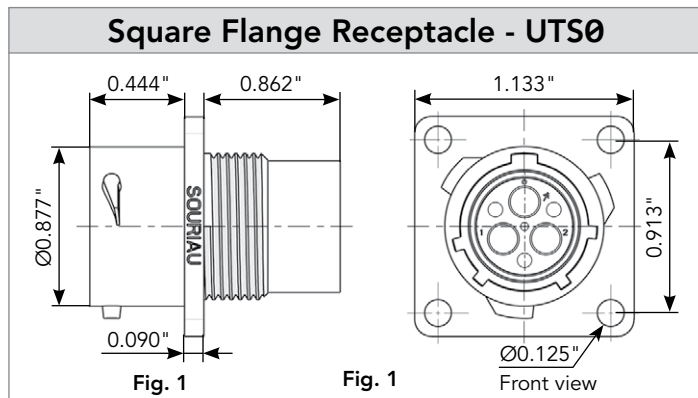

Note: all dimensions are in inches



# 142G1 (Shell size 14, 2 + ground, 3x#8)

## Accessories and Tooling

### Jam Nut or NPT Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS14DCG



IP68/69K

Metal terminal

Part number

UTS14DCGR

### Plug Sealing Cap



IP68/69K

Part number

UTS614DCG

### Plastic Protective Cap



Part numbers

Receptacle  
cap

Plug cap

85005588A

85005597

### Gasket



IP68/69K

Part numbers

UTFD14B

### Hand Tool



Part number

M317

### Positioner + Locator Setting #8



Part number

VGE10078A

### Extraction Tool #8



Part number

51060210936

### Color Coding Rings

G for Green


Y for  
Yellow


R for Red



Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG



# 142G1 (Shell size 14, 2 + ground, 3x#8)

## Contacts



| #8    | Contact type            | Wire size |                 | Part number |             | Max wire Ø | Max insulator Ø |
|-------|-------------------------|-----------|-----------------|-------------|-------------|------------|-----------------|
|       |                         | AWG       | mm <sup>2</sup> | Male        | Female      |            |                 |
| Crimp | Machined                | 16        | 1.31            | 82913601A   | 82913600A   | 0.067 "    | 0.255 "         |
|       |                         | 14        | 2.08            | 82913603A   | 82913602A   | 0.087 "    |                 |
|       |                         | 12        | 3.31            | 82913605A   | 82913604A   | 0.111 "    |                 |
|       |                         | 10        | 5.26            | 82913607A   | 82913606A   | 0.137 "    |                 |
|       |                         | 8         | 8.37            | 82913609A   | 82913608A   | 0.171 "    |                 |
| PCB   | Machined <sup>(1)</sup> | -         |                 | 82911685NPC | 82911684NPC | -          | -               |

(1): For dimensions see page 168

Note: all dimensions are in inches


## Electrical Characteristics

**UL**  
44A 600V UL94 V-0


**CSA**  
30A 600V UL94 V-0

**IEC**  
40A 300V 4kV 3

## UTS 142G1 Derating Curves

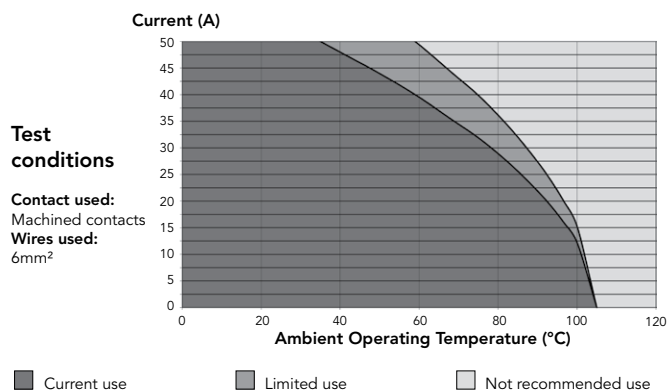

## 8E3/8D3 (Shell size 8, 3x#20)

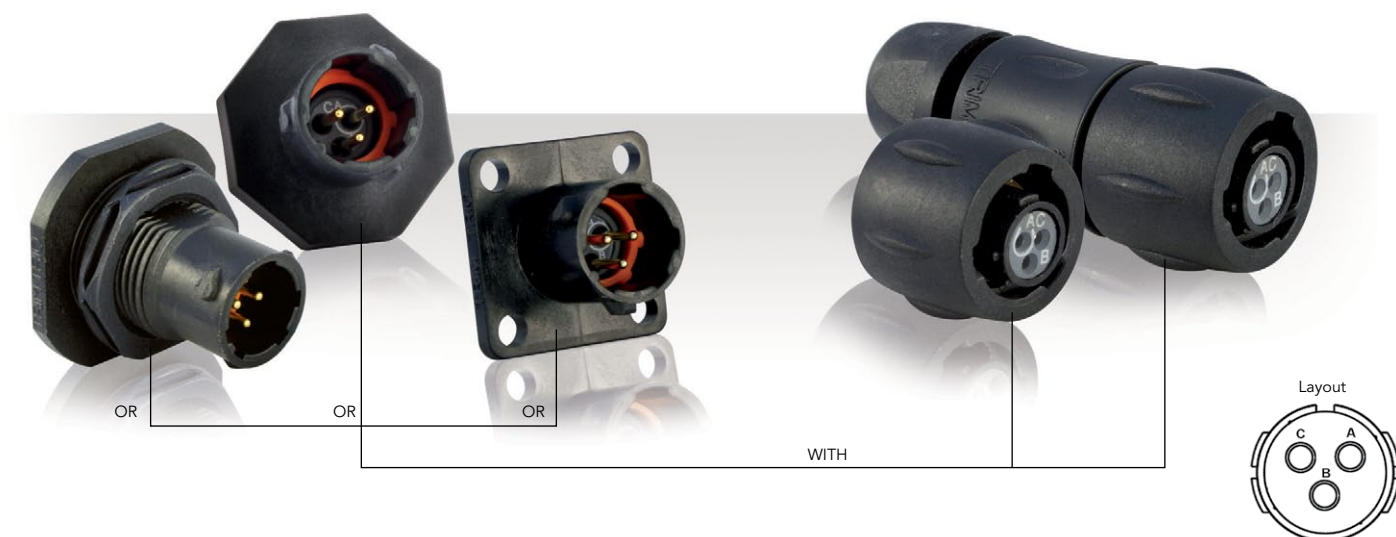

## Connector Part Numbers








| Contact type                                          | Connector type                                                | Backshell            | Part number        |                    |
|-------------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                       |                                                               |                      | Male insert        | Female insert      |
| Hand solder electrical contacts loaded<br>see page 39 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS08E3P</b>    | <b>UTS08E3S</b>    |
|                                                       | Plug                                                          | Without (Fig. 7)     | <b>UTS68E3P</b>    | <b>UTS68E3S</b>    |
|                                                       |                                                               | Cable gland (Fig. 8) | <b>UTS6JC8E3P</b>  | <b>UTS6JC8E3S</b>  |
|                                                       | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS78E3P</b>    | <b>UTS78E3S</b>    |
|                                                       | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78E3PM12</b> | <b>UTS78E3SM12</b> |
| PCB contacts loaded<br>see page 39                    | Square flange receptacle                                      | Without (Fig. 2)     | <b>UTS08D3P</b>    | <b>UTS08D3S</b>    |
|                                                       | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS78D3P32</b>  | <b>UTS78D3S32</b>  |
|                                                       | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS78D3P</b>    | <b>UTS78D3S</b>    |
|                                                       | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78D3PM12</b> | <b>UTS78D3SM12</b> |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

## 8E3/8D3 (Shell size 8, 3x#20)

### Dimensions

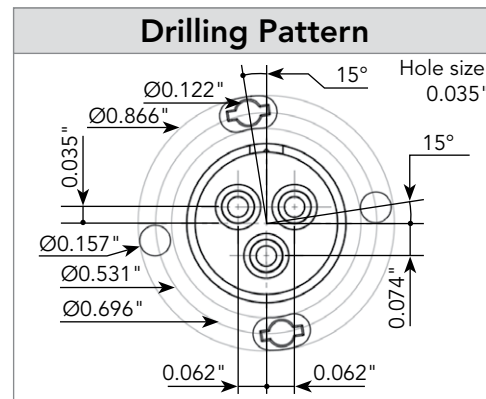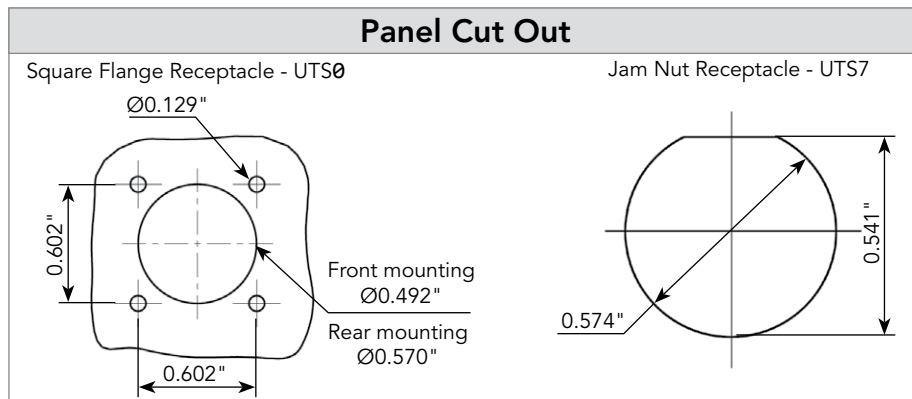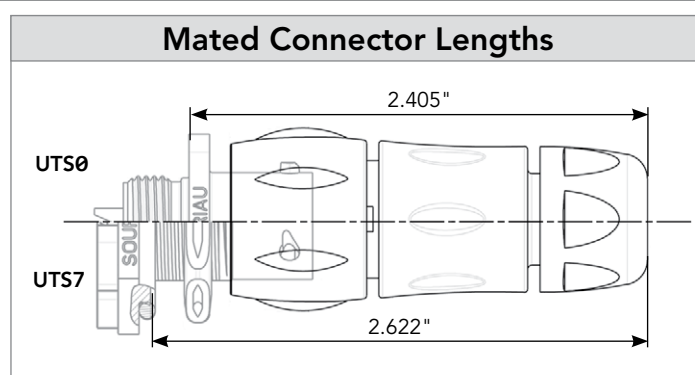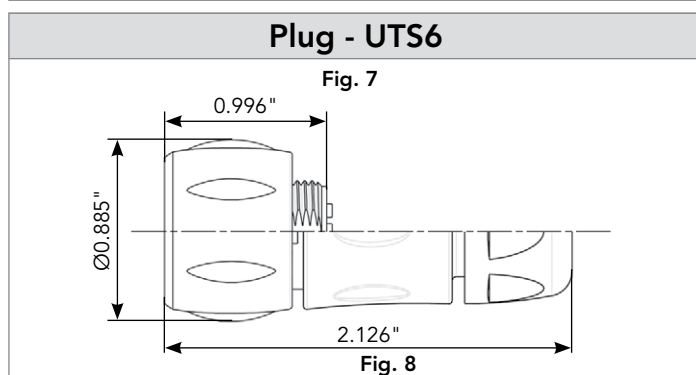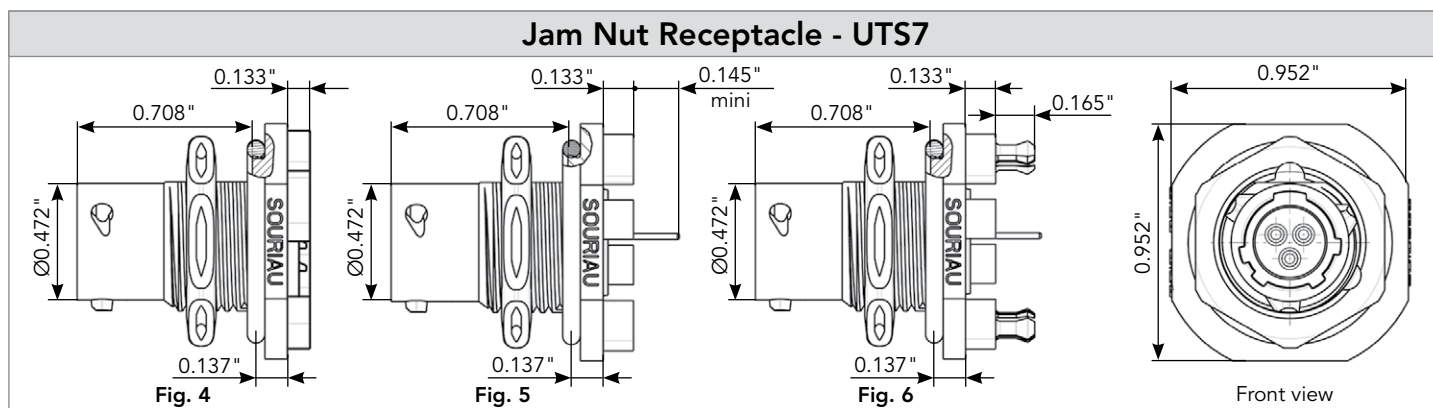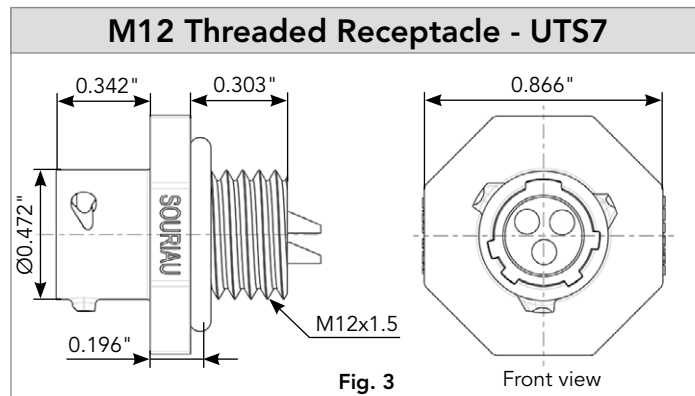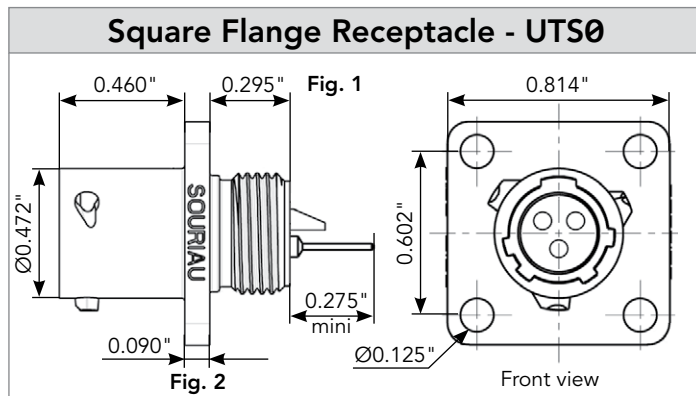

Note: all dimensions are in inches

## 8E3/8D3 (Shell size 8, 3x#20)

### Accessories

#### Jam Nut or M12 Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS8DCG



IP68/69K

Metal terminal

Part number

UTS8DCGR

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS8DCGE

#### Plug Protective Cap



IP40

Part number

UTS68C

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005585A

Plug cap

85005594

#### Gasket



IP68/69K

Part numbers

UTFD11B

#### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

UTS78CCRR

UTS78CCRY

UTS78CCRG

Plugs

UTS68CCRR

UTS68CCRY

UTS68CCRG

## 8E3/8D3 (Shell size 8, 3x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169

3


### Electrical Characteristics

**UL**  
7A 250V UL94 HB


**CSA**  
7A 250V UL94 HB

**IEC**  
7A 32V 1.5kV 3

### UTS 8E3/8D3 Derating Curves

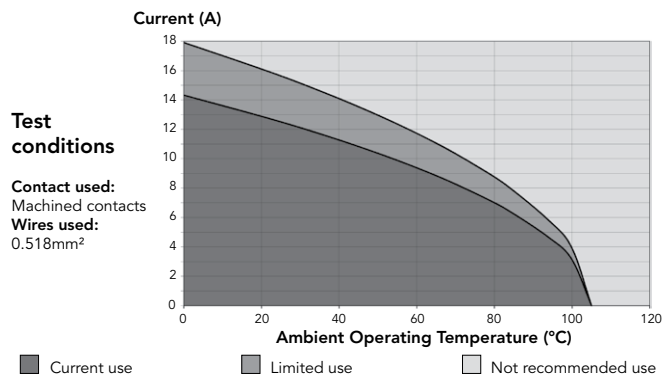

## 8E3A/8D3A - 8E98/8D98 (Shell size 8, 3x#20)

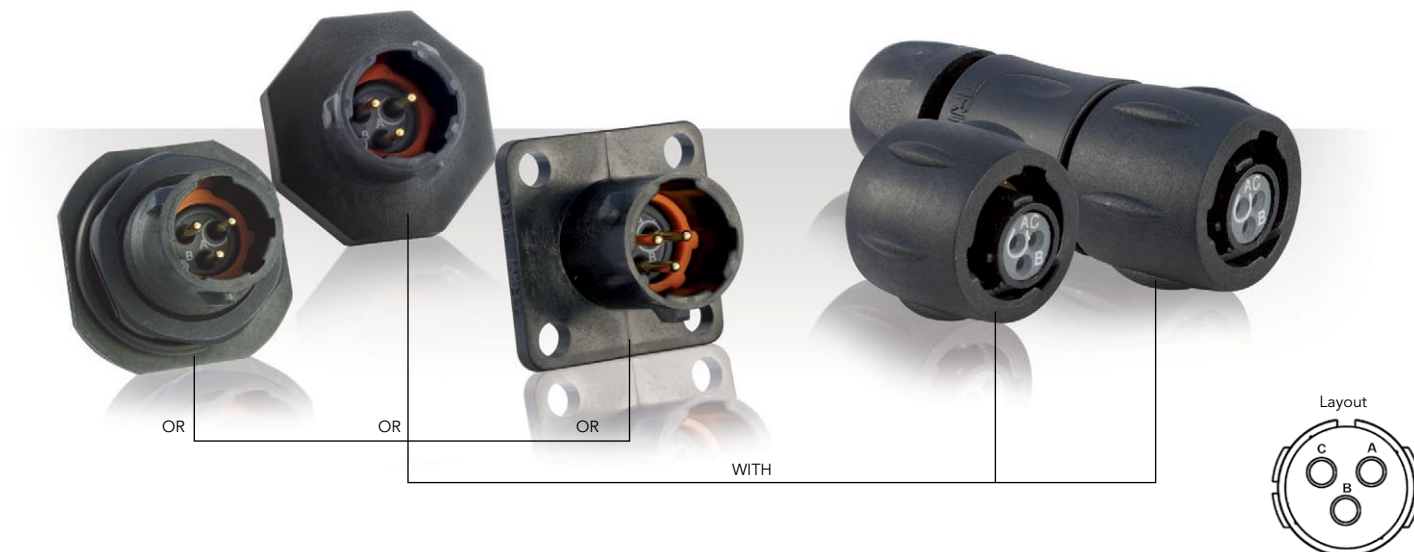

## Connector Part Numbers








| Contact type                                          | Connector type                                                | Backshell            | Part number  |               |
|-------------------------------------------------------|---------------------------------------------------------------|----------------------|--------------|---------------|
|                                                       |                                                               |                      | Male insert  | Female insert |
| Hand solder electrical contacts loaded<br>see page 43 | Square flange receptacle                                      | Without (Fig. 1)     | UTS08E3AP    | UTS08E3AS     |
|                                                       |                                                               |                      | UTS08E98P    | UTS08E98S     |
|                                                       | Plug                                                          | Without (Fig. 7)     | UTS68E3AP    | UTS68E3AS     |
|                                                       |                                                               |                      | UTS68E98P    | UTS68E98S     |
|                                                       |                                                               | Cable gland (Fig. 8) | UTS6JC8E3AP  | UTS6JC8E3AS   |
|                                                       | Jam nut receptacle                                            |                      | UTS6JC8E98P  | UTS6JC8E98S   |
|                                                       |                                                               | Without (Fig. 4)     | UTS78E3AP    | UTS78E3AS     |
|                                                       | M12 threaded receptacle                                       |                      | UTS78E98P    | UTS78E98S     |
|                                                       |                                                               |                      | UTS78E3APM12 | UTS78E3ASM12  |
|                                                       |                                                               | Without (Fig. 3)     | UTS78E98PM12 | UTS78E98SM12  |
| PCB contacts loaded<br>see page 43                    | Square flange receptacle                                      | Without (Fig. 2)     | UTS08D3AP    | UTS08D3AS     |
|                                                       |                                                               |                      | UTS08D98P    | UTS08D98S     |
|                                                       | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | UTS78D3AP32  | UTS78D3AS32   |
|                                                       |                                                               |                      | UTS78D98P32  | UTS78D98S32   |
|                                                       | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | UTS78D3AP    | UTS78D3AS     |
|                                                       |                                                               |                      | UTS78D98P    | UTS78D98S     |
|                                                       | M12 threaded receptacle                                       | Without (Fig. 3)     | UTS78D3APM12 | UTS78D3ASM12  |
|                                                       |                                                               |                      | UTS78D98PM12 | UTS78D98SM12  |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

## 8E3A/8D3A - 8E98/8D98 (Shell size 8, 3x#20)

### Dimensions

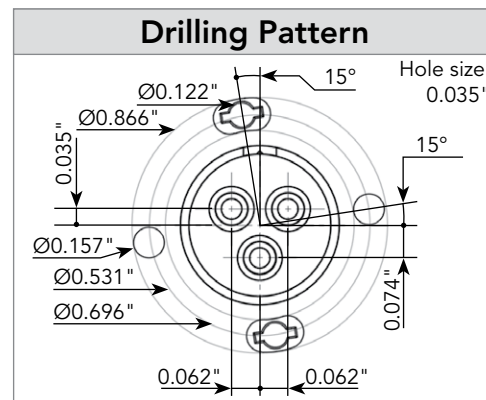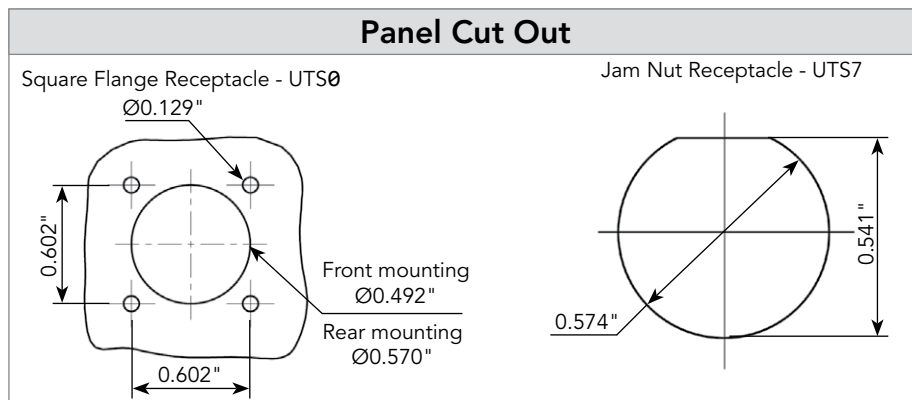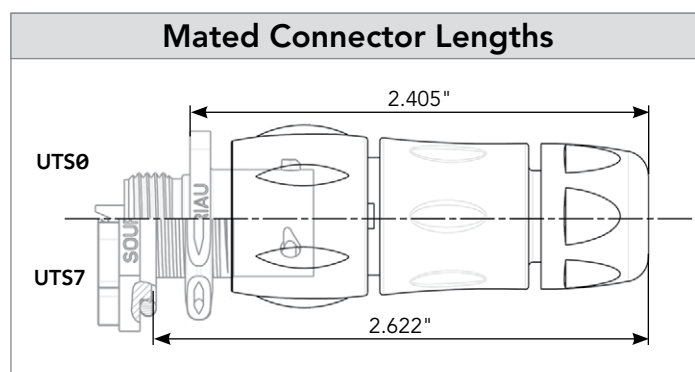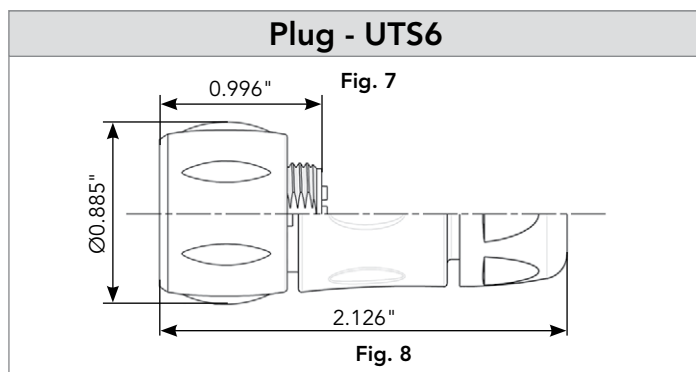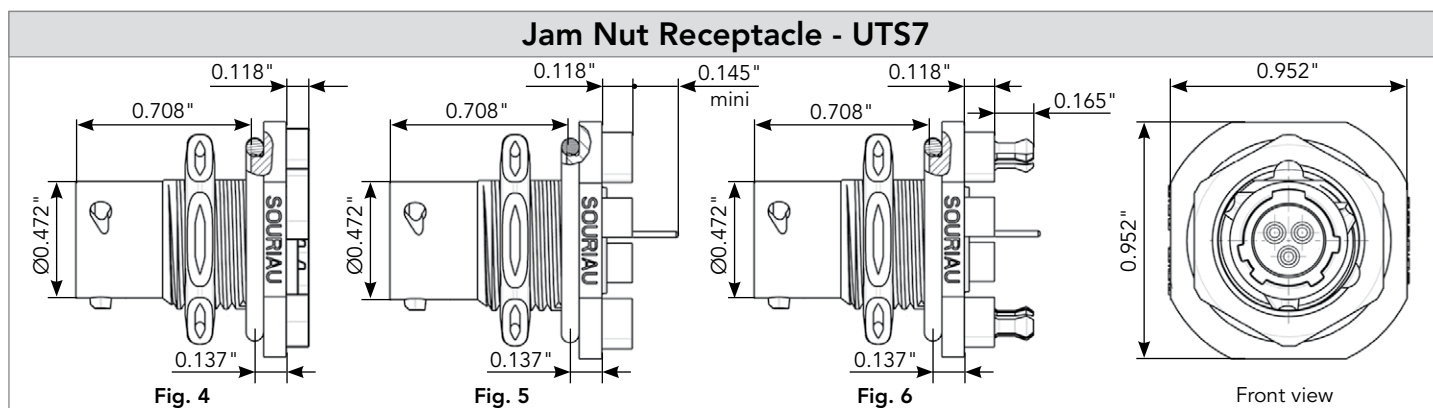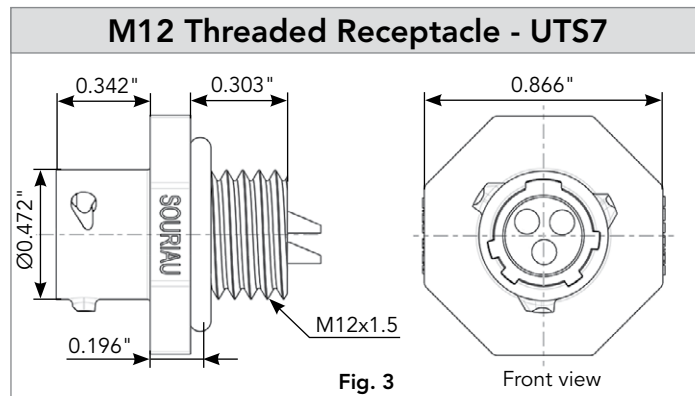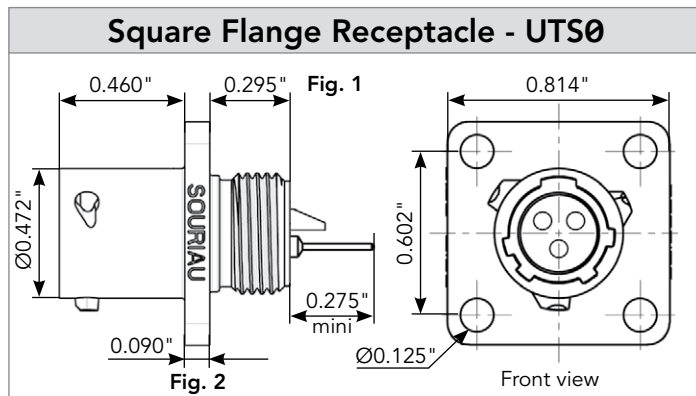

Note: all dimensions are in inches



## 8E3A/8D3A - 8E98/8D98 (Shell size 8, 3x#20)

### Accessories

#### Jam Nut or M12 Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS8DCG



IP68/69K

Metal terminal

Part number

UTS8DCGR

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS8DCGE

#### Plug Protective Cap



IP40

Part number

UTS68C

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005585A

Plug cap

85005594

#### Gasket



IP68/69K

Part numbers

UTFD11B

#### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

UTS78CCRR

UTS78CCRY

UTS78CCRG

Plugs

UTS68CCRR

UTS68CCRY

UTS68CCRG

## 8E3A/8D3A - 8E98/8D98 (Shell size 8, 3x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169

3


#### Electrical Characteristics

**UL**  
7A 250V UL94 HB


**CSA**  
7A 250V UL94 HB

**IEC**  
7A 50V 1.5kV 3

#### UTS 8E3A/8D3A - 8E98/8D98 Derating Curves

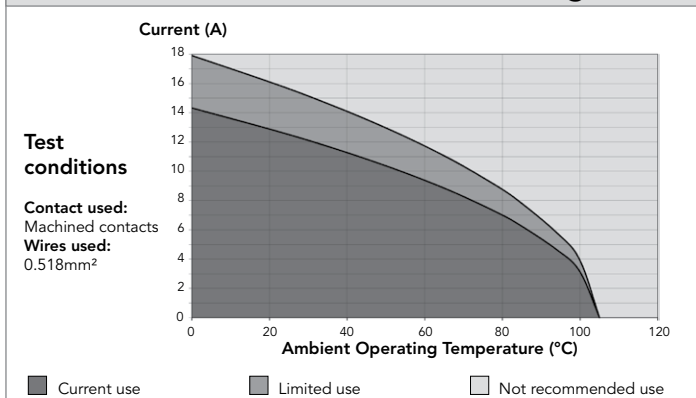

## 8E33/8D33 (Shell size 8, 3x#20)

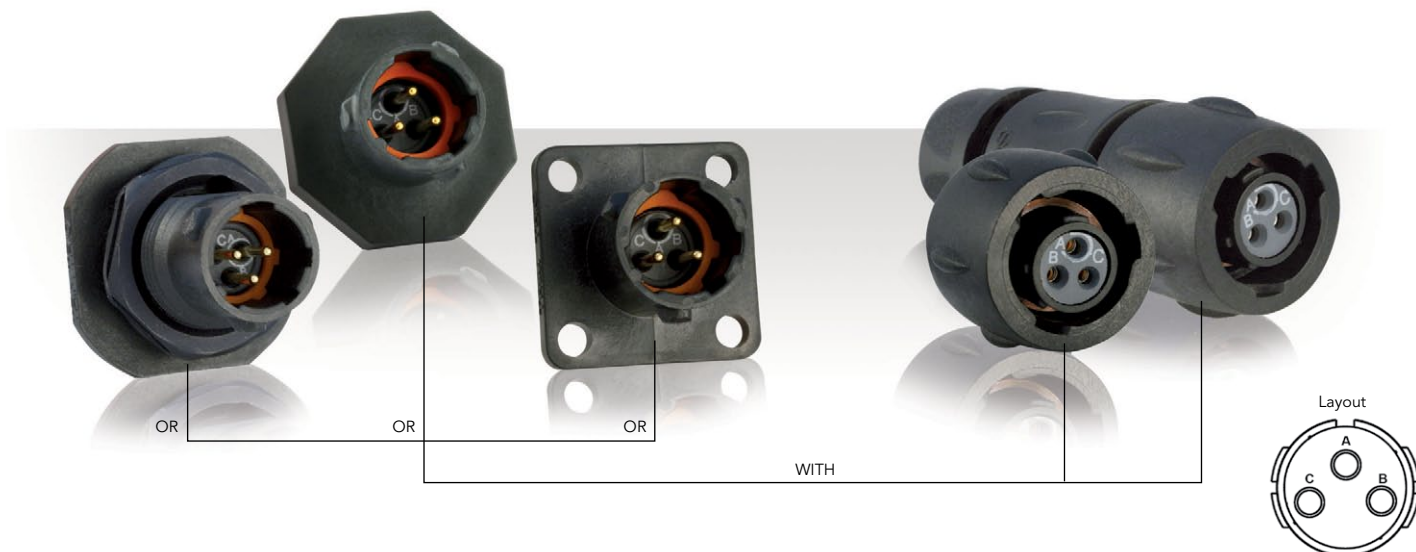

## Connector Part Numbers








| Contact type                                         | Connector type                                                | Backshell            | Part number         |                     |
|------------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                      |                                                               |                      | Male insert         | Female insert       |
| Handsolder electrical contacts loaded<br>see page 47 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS08E33P</b>    | <b>UTS08E33S</b>    |
|                                                      | Plug                                                          | Without (Fig. 7)     | <b>UTS68E33P</b>    | <b>UTS68E33S</b>    |
|                                                      |                                                               | Cable gland (Fig. 8) | <b>UTS6JC8E33P</b>  | <b>UTS6JC8E33S</b>  |
|                                                      | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS78E33P</b>    | <b>UTS78E33S</b>    |
| PCB contacts loaded<br>see page 47                   | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78E33PM12</b> | <b>UTS78E33SM12</b> |
|                                                      | Square flange receptacle                                      | Without (Fig. 2)     | <b>UTS08D33P</b>    | <b>UTS08D33S</b>    |
|                                                      | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS78D33P32</b>  | <b>UTS78D33S32</b>  |
|                                                      | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS78D33P</b>    | <b>UTS78D33S</b>    |
|                                                      | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78D33PM12</b> | <b>UTS78D33SM12</b> |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

## 8E33/8D33 (Shell size 8, 3x#20)

### Dimensions

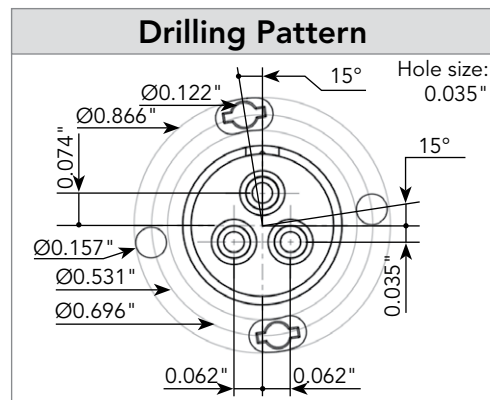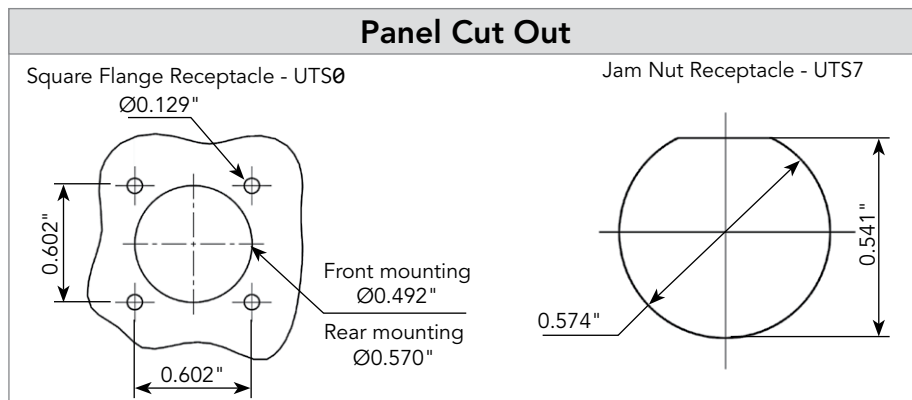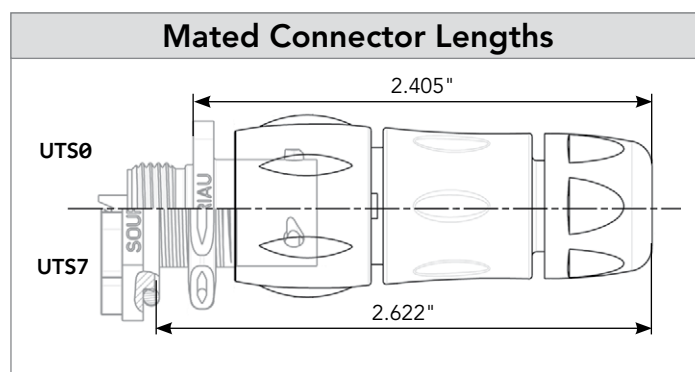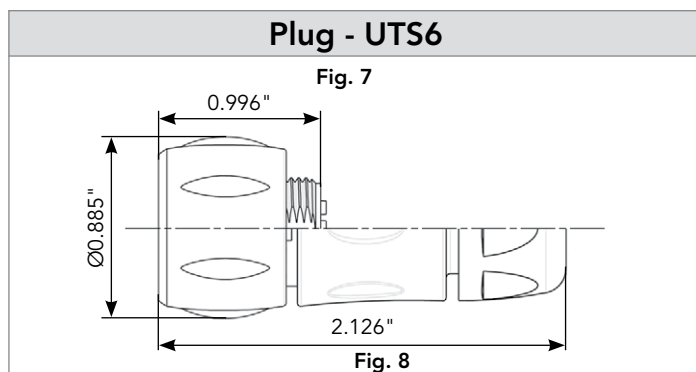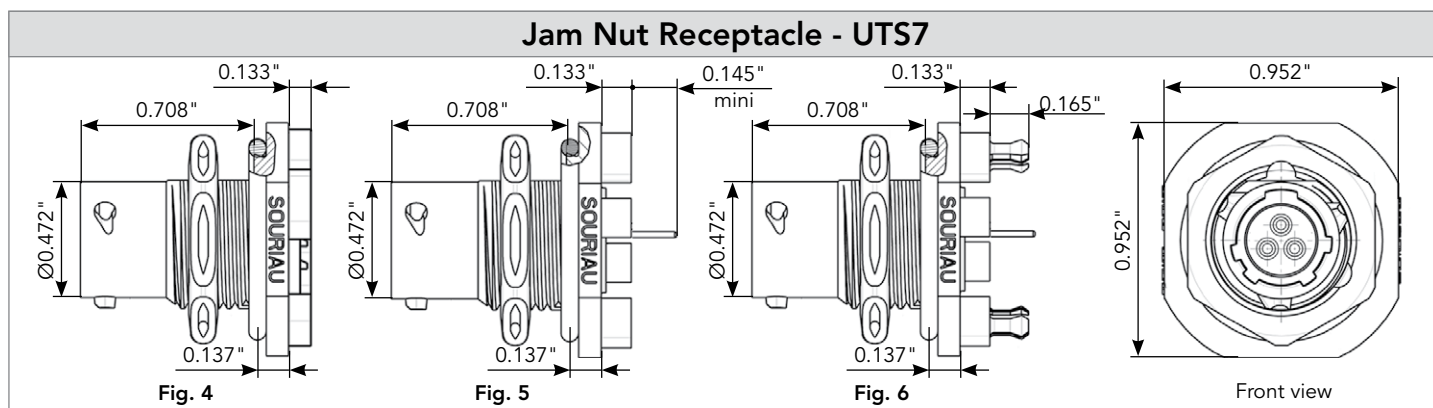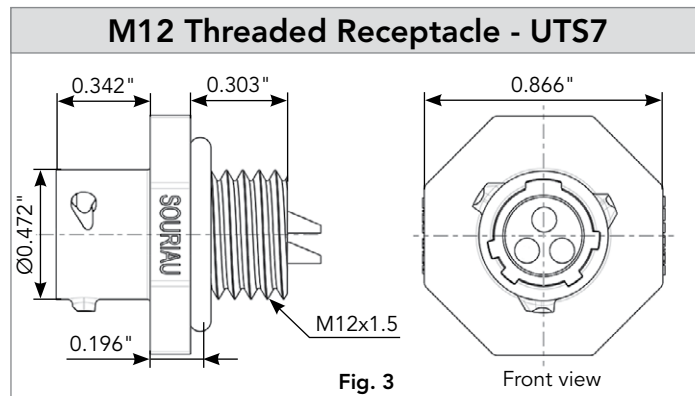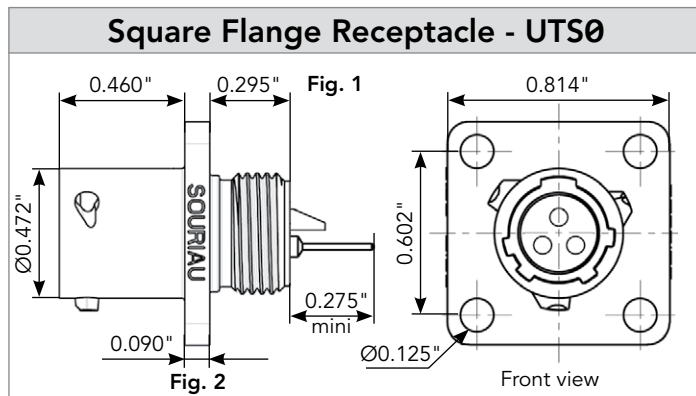

Note: all dimensions are in inches

## 8E33/8D33 (Shell size 8, 3x#20)

### Accessories

#### Jam Nut or M12 Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS8DCG



IP68/69K

Metal terminal

Part number

UTS8DCGR

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS8DCGE

#### Plug Protective Cap



IP40

Part number

UTS68C

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005585A

Plug cap

85005594

#### Gasket



IP68/69K

Part numbers

UTFD11B

#### Color Coding Rings

G for Green



Y for  
Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS78CCRR

UTS68CCRR

UTS78CCRY

UTS68CCRY

UTS78CCRG

UTS68CCRG

## 8E33/8D33 (Shell size 8, 3x#20)

### Contacts

| #20         | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Hand solder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB         | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169

3


#### Electrical Characteristics

**UL**  
7A 250V UL94 HB


**CSA**  
7A 250V UL94 HB

**IEC**  
7A 50V 1.5kV 3

#### UTS 8E33/8D33 Derating Curves

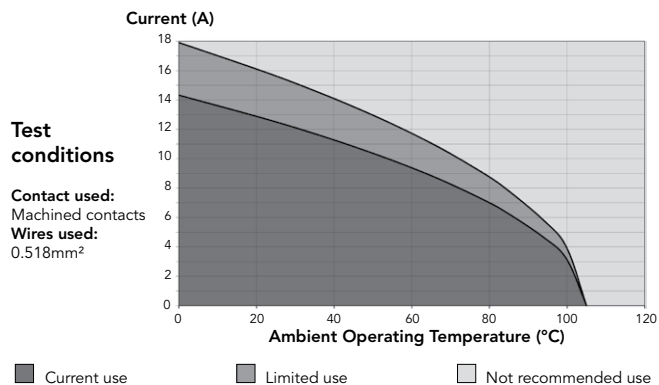

## 12E3/12D3 (Shell size 12, 3x#16)

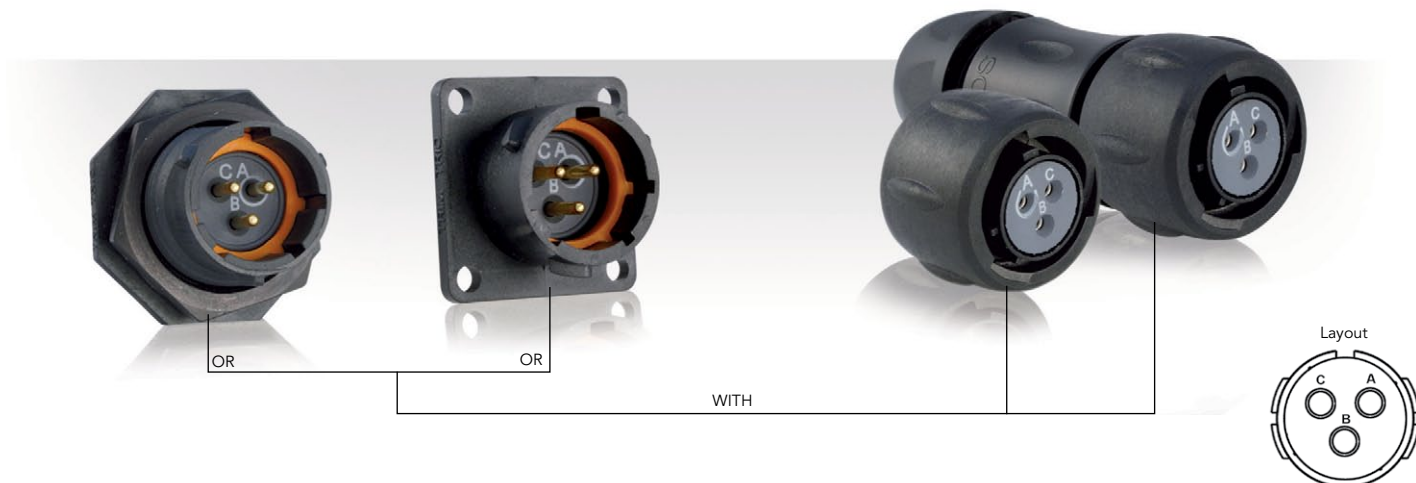

## Connector Part Numbers

| Contact type                                       | Connector type                                                | Backshell            | Part number        |                    |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                    |                                                               |                      | Male insert        | Female insert      |
| Hand solder electrical contacts loaded see page 51 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS012E3P</b>   | <b>UTS012E3S</b>   |
|                                                    | Plug                                                          | Without (Fig. 1)     | <b>UTS612E3P</b>   | <b>UTS612E3S</b>   |
|                                                    |                                                               | Cable gland (Fig. 2) | <b>UTS6JC12E3P</b> | <b>UTS6JC12E3S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS712E3P</b>   | <b>UTS712E3S</b>   |
| PCB contacts loaded see page 51                    | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS012D3P</b>   | <b>UTS012D3S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 5)     | <b>UTS712D3P32</b> | <b>UTS712D3S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 4)     | <b>UTS712D3P</b>   | <b>UTS712D3S</b>   |

Possibilities of discrimination/keying methods see page 208

Sealed unmated



# 12E3/12D3 (Shell size 12, 3x#16)

## Dimensions

### Plug - UTS6




Fig. 1

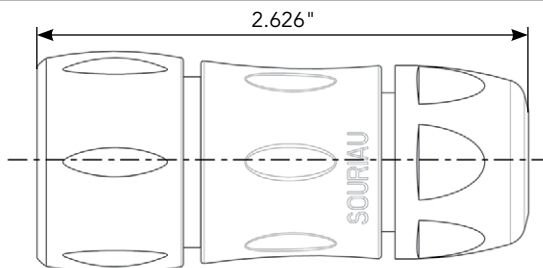


Fig. 2

### Jam Nut Receptacle - UTS7




Fig. 3




Fig. 4





Fig. 5



Front view

### Square Flange Receptacle - UTS0






Fig. 6

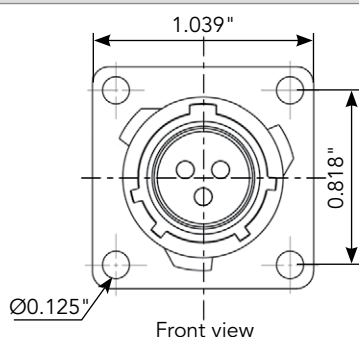


Front view

### Mated Connector Lengths

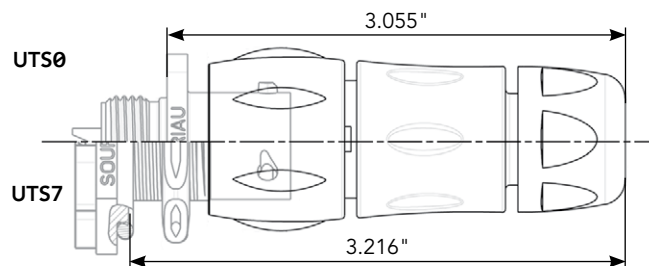


### Panel Cut Out


Square Flange Receptacle - UTS0

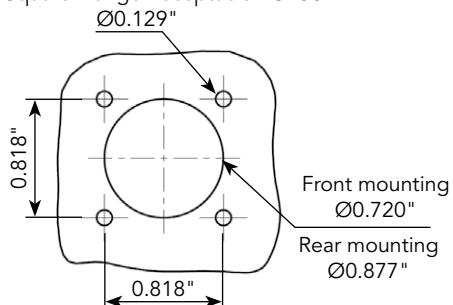

Jam Nut Receptacle - UTS7



### Drilling Pattern

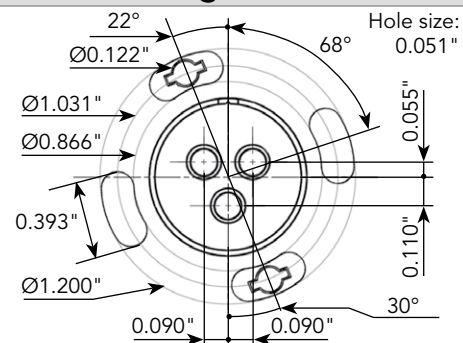

Note: all dimensions are in inches

## 12E3/12D3 (Shell size 12, 3x#16)

### Accessories

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS12DCG



IP68/69K

Metal terminal

Part number

UTS12DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS612DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS12DCGE

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005587A

Plug cap

85005596

#### Gasket



IP68/69K

Part numbers

UTFD13B

#### Color Coding Rings

G for Green



Y for  
Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS712CCRR

UTS612CCRR

UTS712CCRY

UTS612CCRY

UTS712CCRG

UTS612CCRG

## 12E3/12D3 (Shell size 12, 3x#16)

### Contacts

| #16        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 18 to 14               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169

3


#### Electrical Characteristics

**UL**  
13A 600V UL94 HB

**CSA**  
13A 600V UL94 HB

**IEC**  
16A 150V 2.5kV 3

#### UTS 12E3/12D3 Derating Curves

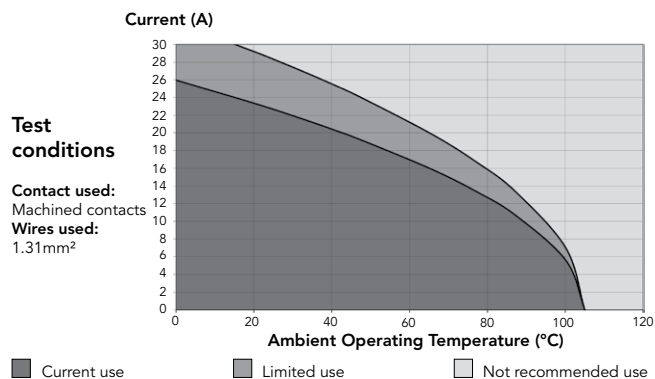

## 124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)



## Connector Part Numbers


| Contact type                                       | Connector type                                                | Backshell             | Part number          |                    |
|----------------------------------------------------|---------------------------------------------------------------|-----------------------|----------------------|--------------------|
|                                                    |                                                               |                       | Male insert          | Female insert      |
| Crimp contacts supplied separately see page 55     | Square flange receptacle                                      | Without (Fig. 1)      | <b>UTS0124P</b>      | -                  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 4)      | <b>UTS7124P</b>      | <b>UTS7124S</b>    |
|                                                    | Free hanging receptacle                                       | Cable gland (Fig. 12) | <b>UTS1JC124P</b>    | <b>UTS1JC124S</b>  |
|                                                    | Plug                                                          | Without (Fig. 10)     | <b>UTS6124P</b>      | <b>UTS6124S</b>    |
| Screw contacts loaded                              | Plug                                                          | Cable gland (Fig. 11) | <b>UTS6JC124P</b>    | <b>UTS6JC124S</b>  |
|                                                    |                                                               | Without (Fig. 6 & 7)  | <b>UTS7124PSCR</b>   | <b>UTS7124SSCR</b> |
|                                                    | Free hanging receptacle                                       | Cable gland (Fig. 12) | <b>UTS1JC124PSCR</b> | -                  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 5)      | <b>UTS7124P</b>      | <b>UTS7124S</b>    |
| PCB contacts supplied separately see page 55       | Square flange receptacle                                      | Without (Fig. 3)      | <b>UTS0124P</b>      | -                  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 9)      | <b>UTS7124P</b>      | <b>UTS7124S</b>    |
|                                                    | Plug                                                          | Without (Fig. 10)     | <b>UTS6124P</b>      | <b>UTS6124S</b>    |
|                                                    | Plug                                                          | Cable gland (Fig. 11) | <b>UTS6JC124P</b>    | <b>UTS6JC124S</b>  |
| Hand solder electrical contacts loaded see page 55 | Square flange receptacle                                      | Without (Fig. 2)      | <b>UTS012E4P</b>     | <b>UTS012E4S</b>   |
|                                                    | Jam nut receptacle                                            | Without (Fig. 9)      | <b>UTS712E4P</b>     | <b>UTS712E4S</b>   |
|                                                    | Plug                                                          | Without (Fig. 10)     | <b>UTS612E4P</b>     | <b>UTS612E4S</b>   |
|                                                    | Plug                                                          | Cable gland (Fig. 11) | <b>UTS6JC12E4P</b>   | <b>UTS6JC12E4S</b> |
| PCB contacts loaded see page 55                    | Square flange receptacle                                      | Without (Fig. 3)      | <b>UTS012D4P</b>     | <b>UTS012D4S</b>   |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 9)      | <b>UTS712D4P</b>     | <b>UTS712D4S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 8)      | <b>UTS712D4P32</b>   | <b>UTS712D4S32</b> |
|                                                    | Plug                                                          | Without (Fig. 10)     | <b>UTS612D4P</b>     | <b>UTS612D4S</b>   |

Sealed unmated


# 124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)

## Dimensions


### Square Flange Receptacle - UTS0

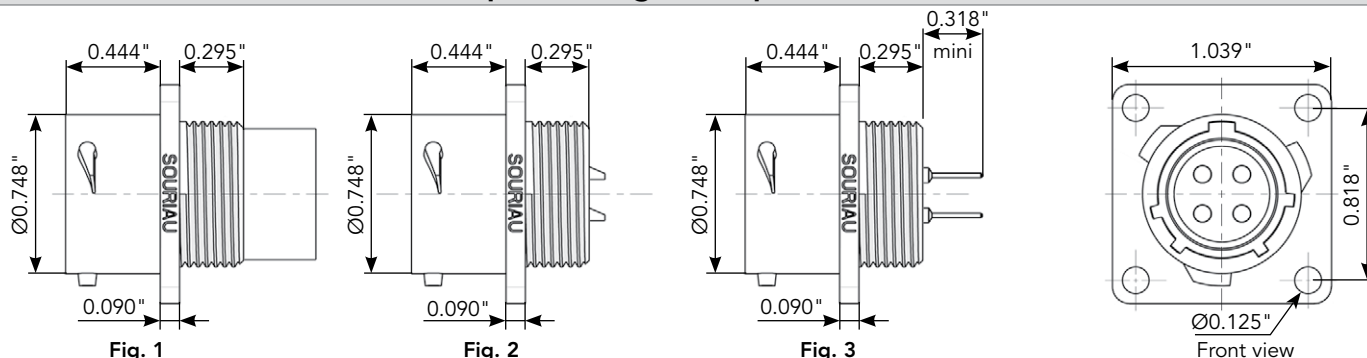


### Jam Nut Receptacle - UTS7

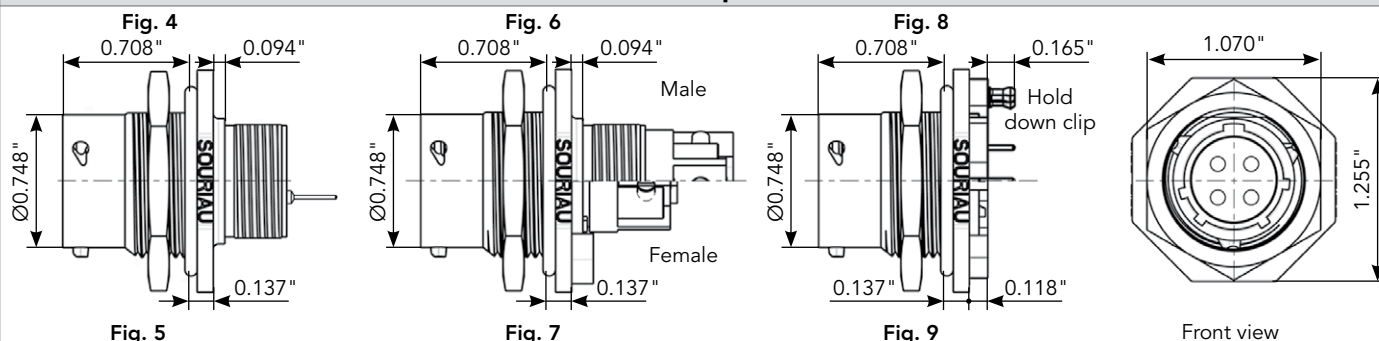

### Free Hanging - UTS1 / Plug - UTS6

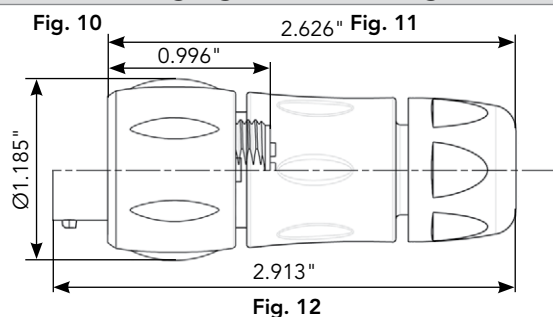


### Mated Connector Lengths

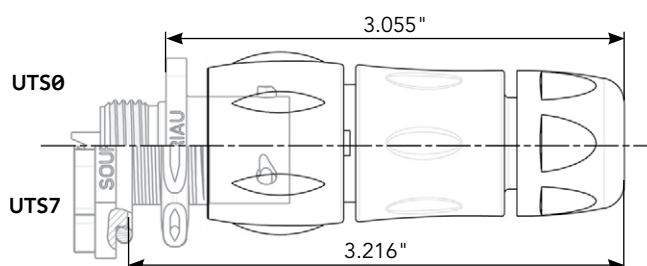


### Panel Cut Out


#### Square Flange Receptacle - UTS0

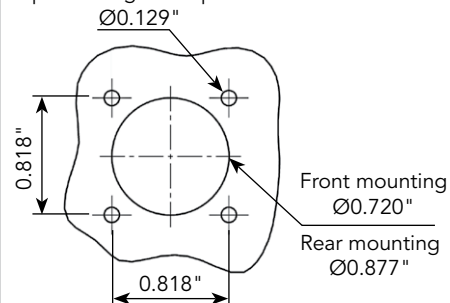

#### Jam Nut Receptacle - UTS7

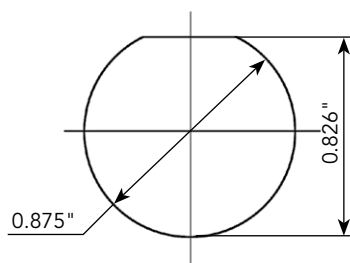

### Drilling Pattern

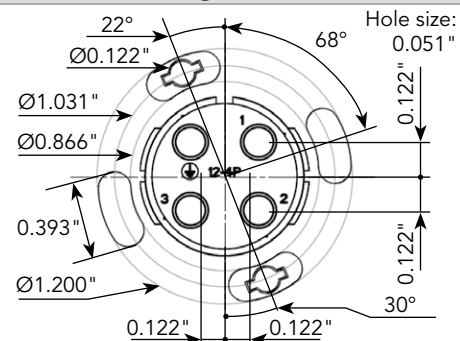

Note: all dimensions are in inches

# 124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS12DCG



IP68/69K

Metal terminal

Part number  
UTS12DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS612DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS12DCGE

### Plastic Protective Cap



#### Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005587A      | 85005596 |

### Gasket



IP68/69K

Part numbers  
UTFD13B

### Crimp Tooling (without Shandles)




| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + yorK090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see p. 168

\* Heads to be used with handle PN: SHANGLES

Coaxial contacts available  
see pages 167, 200 to 206

### Color Coding Rings



#### Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS712CCRR  | UTS612CCRR |
| UTS712CCRY  | UTS612CCRY |
| UTS712CCRG  | UTS612CCRG |



# 124 - 12E4/12D4 (Shell size 12, 3 + ground, 4x#16)

## Contacts for 124

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |
| Hand-solder | Loaded in the connector                                          | 14-18                     | 2.08-0.80 | -                            | -                            | -          | -               |

(1): Example of plating, for other plating see page 168 (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6 (3): For dimensions see page 168 Note: all dimensions are in inches

## Contacts for 12E4/12D4


| #16         | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Hand-solder | Loaded in the connector                          | Min 0.4µ gold over 0.8µ Ni | 18 to 14               | 0.196"                |
| PCB         | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4µ gold over 0.8µ Ni | -                      | -                     |

(1): For dimensions see page 169

### Electrical Characteristics

|                                                             |                                                |
|-------------------------------------------------------------|------------------------------------------------|
| <b>UTS 124</b><br>UL<br>10A 500V UL94 V-0                   | <b>UTS 12E4/12D4</b><br>UL<br>10A 500V UL94 HB |
| <b>CSA</b><br>7A 500V UL94 V-0                              | <b>CSA</b><br>7A 500V UL94 HB                  |
| <b>IEC</b><br>16A 300V 4kV 3<br>Temperature elevation: 50°C |                                                |

### UTS 124 - 12E4/12D4 Derating Curves

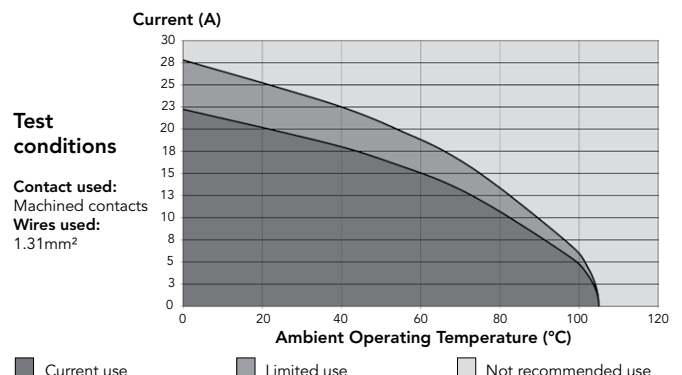



## 183G1 (Shell size 18, 3 + ground, 4x#8)



## Connector Part Numbers

| Contact type                                   | Connector type               | Backshell            | Part number         |                      |
|------------------------------------------------|------------------------------|----------------------|---------------------|----------------------|
|                                                |                              |                      | Male insert         | Female insert        |
| Crimp contacts supplied separately see page 59 | NPT 3/4" threaded receptacle | Without (Fig. 1)     | -                   | <b>UTS7183G1SNPT</b> |
|                                                | Plug                         | Without (Fig. 2)     | <b>UTS6183G1P</b>   | -                    |
|                                                | Plug                         | Cable gland (Fig. 3) | <b>UTS6JC183G1P</b> | -                    |
| PCB contacts supplied separately see page 59   | NPT 3/4" threaded receptacle | Without (Fig. 1)     | -                   | <b>UTS7183G1SNPT</b> |
|                                                | Plug                         | Without (Fig. 2)     | <b>UTS6183G1P</b>   | -                    |



# 183G1 (Shell size 18, 3 + ground, 4x#8)

## Dimensions

### NPT Threaded Receptacle - UTS7

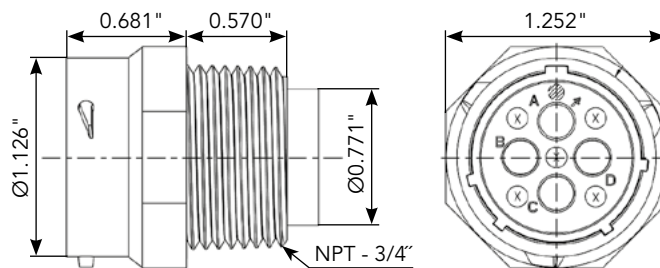


Fig. 1

### Plug - UTS6




Fig. 2



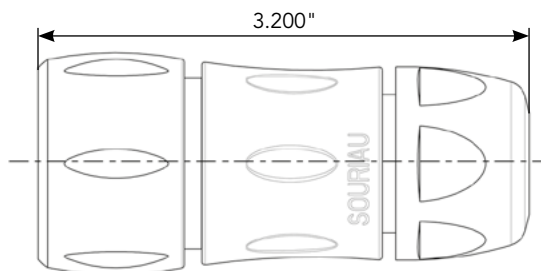


Fig. 3


### Mated Connector Length - UTS6JC

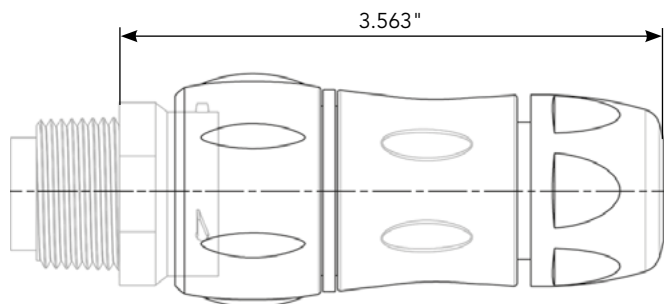

### Panel cut



### Drilling Pattern

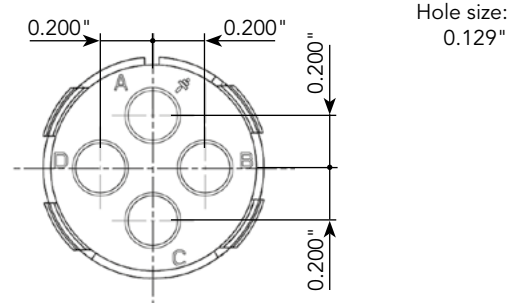

Note: all dimensions are in inches

## 183G1 (Shell size 18, 3 + ground, 4x#8)

### Accessories and Tooling

#### Jam Nut or NPT Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS18DCG



IP68/69K

Metal terminal

Part number

UTS18DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS618DCG

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

Plug cap

85005590A

85005599

#### Gasket



IP68/69K

Part numbers

UTFD16B

#### Hand Tool



Part number

M317

#### Positioner + Locator Setting #8



Part number

VGE10078A

#### Extraction Tool #8



Part number

51060210936

#### Color Coding Rings

G for Green



Y for  
Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS718CCRR

UTS618CCRR

UTS718CCRY

UTS618CCRY

UTS718CCRG

UTS618CCRG

# 183G1 (Shell size 18, 3 + ground, 4x#8)

## Contacts

| #8    | Contact type            | Wire size |                 | Part number |             | Max wire Ø | Max insulator Ø |
|-------|-------------------------|-----------|-----------------|-------------|-------------|------------|-----------------|
|       |                         | AWG       | mm <sup>2</sup> | Male        | Female      |            |                 |
| Crimp | Machined                | 16        | 1.31            | 82913601A   | 82913600A   | 0.067"     | 0.255"          |
|       |                         | 14        | 2.08            | 82913603A   | 82913602A   | 0.087"     |                 |
|       |                         | 12        | 3.31            | 82913605A   | 82913604A   | 0.111"     |                 |
|       |                         | 10        | 5.26            | 82913607A   | 82913606A   | 0.137"     |                 |
|       |                         | 8         | 8.37            | 82913609A   | 82913608A   | 0.171"     |                 |
| PCB   | Machined <sup>(1)</sup> | -         | -               | 82911685NPC | 82911684NPC | -          | -               |

(1): For dimensions see page 168

Note: all dimensions are in inches

3 +  
⏏


### Electrical Characteristics

**UL**  
44A 600V UL94 V-0


**CSA**  
26A 600V UL94 V-0

**IEC**  
32A 300V 4kV 3

### UTS 183G1 Derating Curves

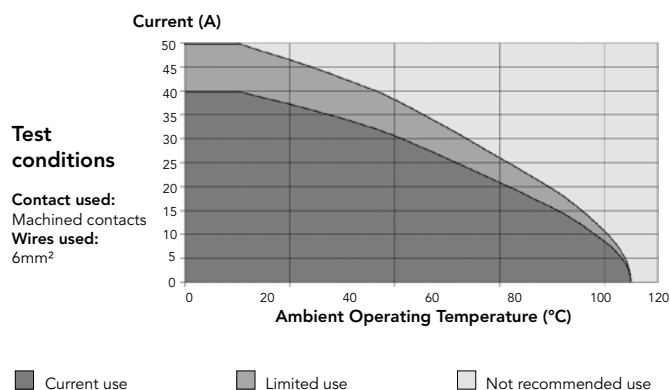

## 8E4/8D4 (Shell size 8, 4x#20)

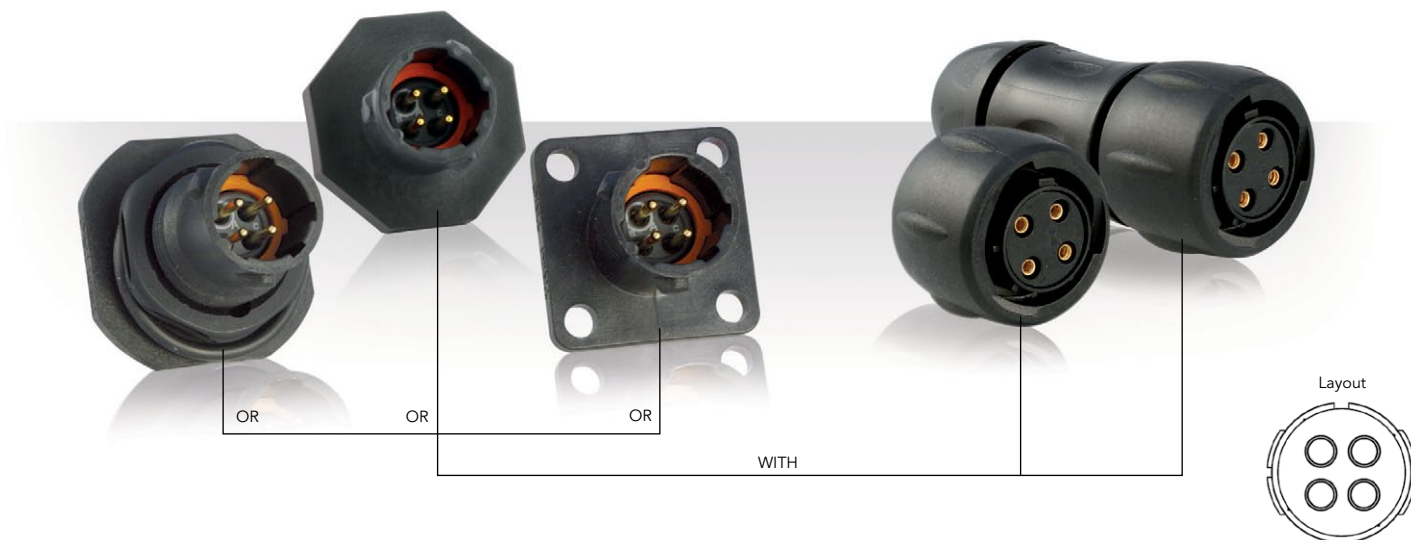

## Connector Part Numbers

| Contact type                                          | Connector type                                                | Backshell            | Part number        |                    |
|-------------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                       |                                                               |                      | Male insert        | Female insert      |
| Hand solder electrical contacts loaded<br>see page 63 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS08E4P</b>    | <b>UTS08E4S</b>    |
|                                                       | Plug                                                          | Without (Fig. 7)     | <b>UTS68E4P</b>    | <b>UTS68E4S</b>    |
|                                                       |                                                               | Cable gland (Fig. 8) | <b>UTS6JC8E4P</b>  | <b>UTS6JC8E4S</b>  |
|                                                       | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS78E4P</b>    | <b>UTS78E4S</b>    |
|                                                       | M12 threaded receptacle                                       | Without (Fig. 3)     | <b>UTS78E4PM12</b> | <b>UTS78E4SM12</b> |
| PCB contacts loaded<br>see page 63                    | Square flange receptacle                                      | Without (Fig. 2)     | <b>UTS08D4P</b>    | <b>UTS08D4S</b>    |
|                                                       | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS78D4P32</b>  | <b>UTS78D4S32</b>  |
|                                                       | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS78D4P</b>    | <b>UTS78D4S</b>    |

Possibilities of discrimination/keying methods see page 208

Sealed unmated



## 8E4/8D4 (Shell size 8, 4x#20)

### Accessories

#### Jam Nut or M12 Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS8DCG



IP68/69K

Metal terminal

Part number

UTS8DCGR

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS8DCGE

#### Plug Protective Cap



IP40

Part number

UTS68C

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005585A

Plug cap

85005594

#### Gasket



IP68/69K

Part numbers

UTFD11B

#### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

UTS78CCRR

UTS78CCRY

UTS78CCRG

Plugs

UTS68CCRR

UTS68CCRY

UTS68CCRG

## 8E4/8D4 (Shell size 8, 4x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169

4


#### Electrical Characteristics

**UL**  
7A 250V UL94 HB

**CSA**  
7A 250V UL94 HB


**IEC**  
7A 32V 1.5kV 3

#### UTS 8E4/8D4 Derating Curves

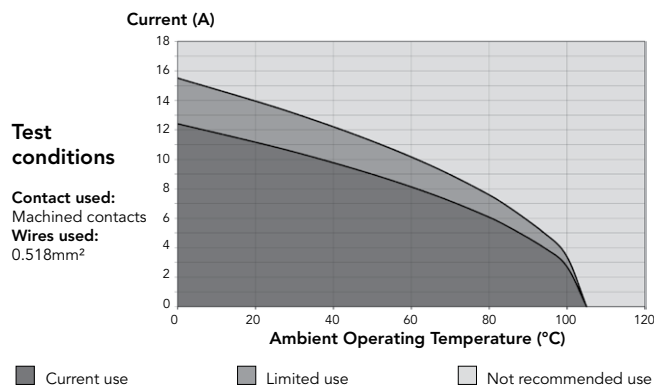



102W2 (Shell size 10, 2x#20, 2x#12)

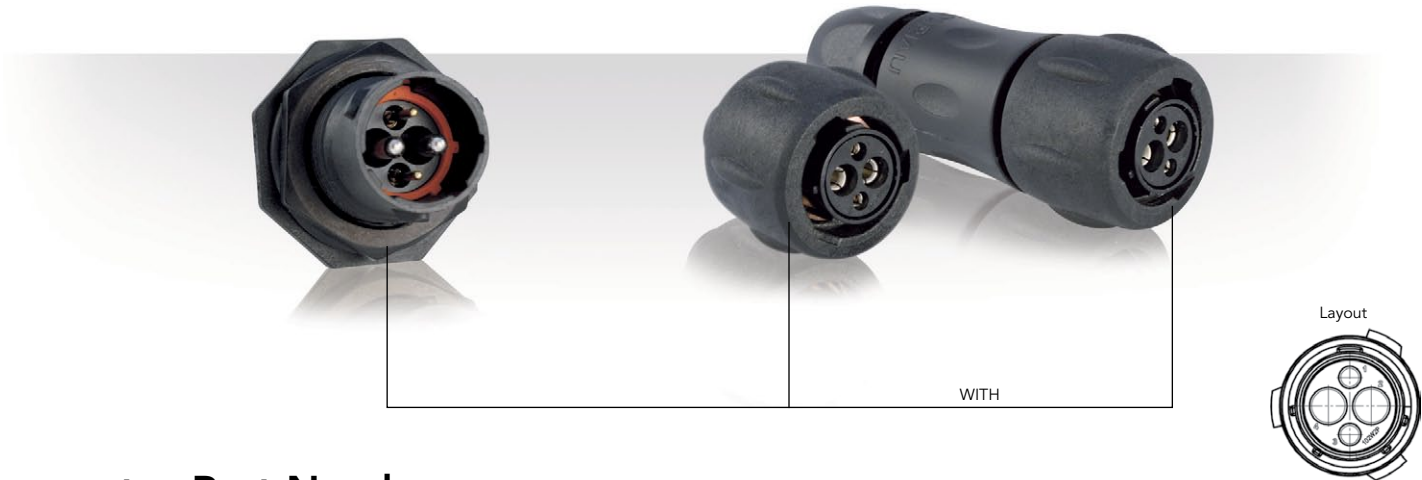

Connector Part Numbers

| Contact type                                   | Connector type          | Backshell            | Part number  |               |
|------------------------------------------------|-------------------------|----------------------|--------------|---------------|
|                                                |                         |                      | Male insert  | Female insert |
| Crimp contacts supplied separately see page 67 | Free hanging receptacle | Cable gland (Fig. 1) | UTS1JC102W2P | UTS1JC102W2S  |
|                                                | Plug                    | Without (Fig. 2)     | UTS6102W2P   | UTS6102W2S    |
|                                                | Plug                    | Cable gland (Fig. 3) | UTS6JC102W2P | UTS6JC102W2S  |
|                                                | Jam nut receptacle      | Without (Fig. 4)     | UTS7102W2P   | UTS7102W2S    |

# 102W2 (Shell size 10, 2x#20, 2x#12)

## Dimensions

### Free Hanging - UTS1

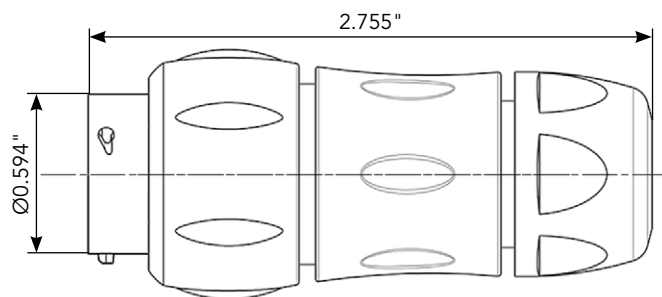


Fig. 1

### Plug - UTS6




Fig. 2 Male




Fig. 2 Female

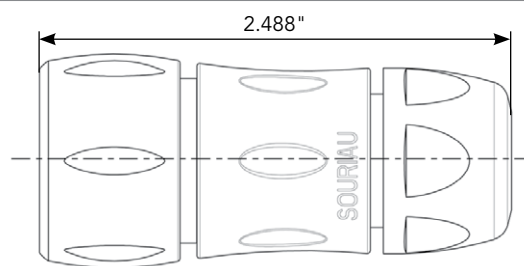


Fig. 3

### Jam Nut Receptacle - UTS7


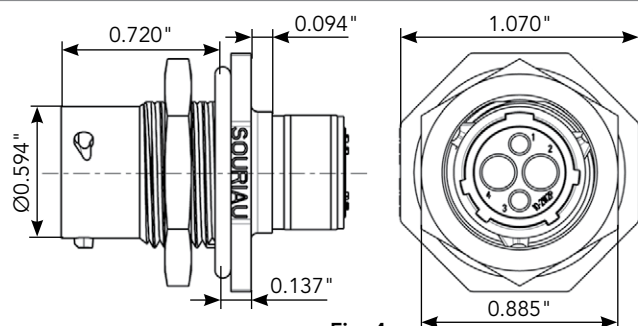



Fig. 4

### Mated Connector Length - UTS7

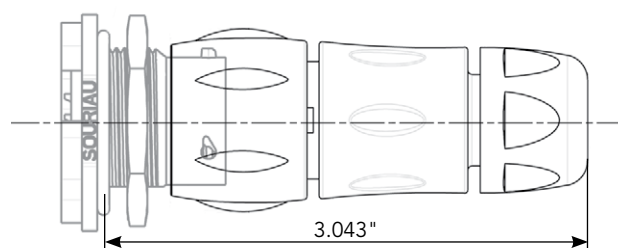


### Panel Cut Out

Jam Nut Receptacle - UTS7

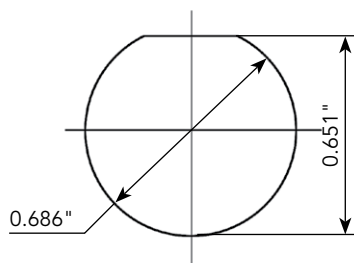

### Drilling Pattern



Note: all dimensions are in inches

# 102W2 (Shell size 10, 2x#20, 2x#12)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

### Extraction Tool #20



Part number  
RX20D44

### Plastic Protective Cap



Part numbers

Receptacle  
cap  
85005586A

Plug cap  
85005595

### Gasket



IP68/69K

Part numbers  
UTFD12B

### Color Coding Rings

G for Green



Y for Yellow



R for Red

Part numbers

Receptacles

Plugs

UTS710CCRR

UTS610CCRR

UTS710CCRY

UTS610CCRY

UTS710CCRG

UTS610CCRG

### Crimp Tooling #20



Part number  
SHANGLES



Part number  
TOOLKIT



Contacts

Contact size

Part number  
of head

RM/RC 24W3K<sup>(1)</sup>

RM/RC 20W3K<sup>(1)</sup>

RM/RC 18W3K<sup>(1)</sup>

SM/SC 24WL3<sup>(1)(2)</sup>

SM/SC 20WL3<sup>(1)(2)</sup>

Standard contacts

#20

Ø 1.0 mm

S20RCM\*

S20RCM\*

S20RCM\*

S20SCM20\*

S20SCM20\*

(1): Example of plating, for other plating options see page 164

(2): loose contact

\* Heads to be used with handle PN: SHANGLES



Handle



Head



Complete set

### Crimp Tooling #12



Part number hand tool

M317


Part number  
positioner + locator setting

VGE10078A

### Extraction Tool #12


Part number  
extraction tool

51060210924

# 102W2 (Shell size 10, 2x#20, 2x#12)

## Contacts

| #20   | Contact type                                                     | Wire size |                 | Part number                 |                             | Max wire Ø | Max insulator Ø |
|-------|------------------------------------------------------------------|-----------|-----------------|-----------------------------|-----------------------------|------------|-----------------|
|       |                                                                  | AWG       | mm <sup>2</sup> | Male                        | Female                      |            |                 |
| Crimp | Machined                                                         | 26-24     | 0.13-0.20       | RM24W3K                     | RC24W3K                     | 0.031 "    | 0.062 "         |
|       |                                                                  | 22-20     | 0.32-0.52       | RM20W3K                     | RC20W3K                     | 0.045 "    | 0.062 "         |
|       |                                                                  | 20-18     | 0.52-0.80       | RM18W3K                     | RC18W3K                     | 0.051 "    | 0.082 "         |
|       | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24     | 0.13-0.20       | SM24W3TK6 <sup>(1)(2)</sup> | SC24W3TK6 <sup>(1)(2)</sup> | -          | 0.035"-0.062"   |
|       |                                                                  | 26-24     | 0.13-0.20       | SM24W3S26 <sup>(1)(2)</sup> | SC24W3S25 <sup>(1)(2)</sup> | -          | 0.035"-0.062"   |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3TK6 <sup>(1)(2)</sup> | SC20W3TK6 <sup>(1)(2)</sup> | -          | 0.047"-0.082"   |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3S26 <sup>(1)(2)</sup> | SC20W3S25 <sup>(1)(2)</sup> | -          | 0.047"-0.082"   |
|       |                                                                  |           |                 |                             |                             |            |                 |
| #12   |                                                                  |           |                 |                             |                             |            |                 |
| Crimp | Machined                                                         | 22        | 0.32            | 82911457NA                  | 82911456A                   | 0.034 "    | 0.192 "         |
|       |                                                                  | 20        | 0.52            | 82911459NA                  | 82911458A                   | 0.044 "    |                 |
|       |                                                                  | 18        | 0.80            | 82911461NA                  | 82911460A                   | 0.055 "    |                 |
|       |                                                                  | 16        | 1.31            | 82911463NA                  | 82911462A                   | 0.067 "    |                 |
|       |                                                                  | 14        | 2.08            | 82911465NA                  | 82911464A                   | 0.087 "    |                 |
|       |                                                                  | 12        | 3.31            | 82911467NA                  | 82911466A                   | 0.111 "    |                 |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20W3TK6L

Note: all dimensions are in inches


### Electrical Characteristics

**UL**  
20A 500V UL94 V-0


**CSA**  
18A 500V UL94 V-0

**IEC**  
25A 150V 2.5kV 3  
Temperature elevation: 50°C

### UTS 102W2 Derating Curves

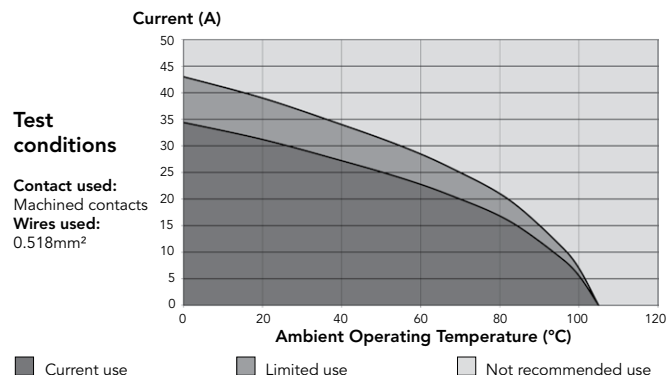

## 104 (Shell size 10, 4x#16)

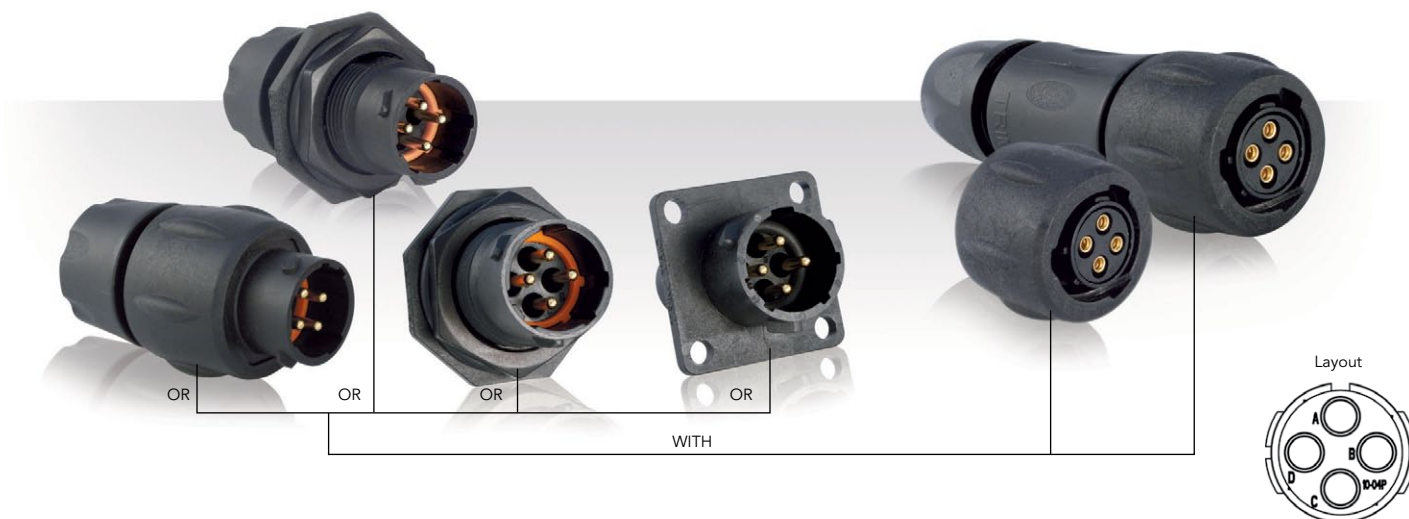

## Connector Part Numbers

| Contact type                                   | Connector type           | Backshell                         | Part number        |                    |
|------------------------------------------------|--------------------------|-----------------------------------|--------------------|--------------------|
|                                                |                          |                                   | Male insert        | Female insert      |
| Crimp contacts supplied separately see page 71 | Square flange receptacle | Without (Fig. 1)                  | <b>UTS0104P</b>    | <b>UTS0104S</b>    |
|                                                | Free hanging receptacle  | Cable gland and grommet* (Fig. 2) | <b>UTS1GJC104P</b> | -                  |
|                                                | Free hanging receptacle  | Nut and grommet* (Fig. 3)         | <b>UTS1GN104P</b>  | -                  |
|                                                | Free hanging receptacle  | Cable gland (Fig. 2)              | <b>UTS1JC104P</b>  | <b>UTS1JC104S</b>  |
|                                                | Plug                     | Without (Fig. 4)                  | <b>UTS6104P</b>    | <b>UTS6104S</b>    |
|                                                | Plug                     | Cable gland and grommet* (Fig. 5) | -                  | <b>UTS6GJC104S</b> |
|                                                | Plug                     | Nut and grommet* (Fig. 6)         | -                  | <b>UTS6GN104S</b>  |
|                                                | Plug                     | Cable gland (Fig. 5)              | <b>UTS6JC104P</b>  | <b>UTS6JC104S</b>  |
|                                                | Jam nut receptacle       | Without (Fig. 7)                  | <b>UTS7104P</b>    | <b>UTS7104S</b>    |
|                                                | Jam nut receptacle       | Cable gland and grommet* (Fig. 9) | <b>UTS7GJC104P</b> | -                  |
|                                                | Jam nut receptacle       | Nut and grommet* (Fig. 8)         | <b>UTS7GN104P</b>  | -                  |
| PCB contacts supplied separately see page 71   | Jam nut receptacle       | Without (Fig. 7)                  | <b>UTS7104P</b>    | <b>UTS7104S</b>    |

Possibilities of discrimination/keying methods see page 208

\* Grommet for discrete wire sealing








## Overmolded Cable Assembly Part Numbers

| Overmolding type                      | Description                              | Wire size | Part number (length: 3 ft)* |
|---------------------------------------|------------------------------------------|-----------|-----------------------------|
| Overmolded harnesses, straight ending | D/E assembly 1 male plug & 1 female plug | 16 AWG    | <b>UTS6V1004PS03FT00</b>    |
|                                       | S/E assembly 1 female plug               | 16 AWG    | <b>UTS6V1004S03FT00</b>     |
|                                       | S/E assembly 1 male plug                 | 16 AWG    | <b>UTS6V1004P03FT00</b>     |

\* Other lengths available: 3, 6, 12 feet only: e.g. UTS6V1004PS06FT00 for a 6 feet version

104 (Shell size 10, 4x#16)

## Dimensions

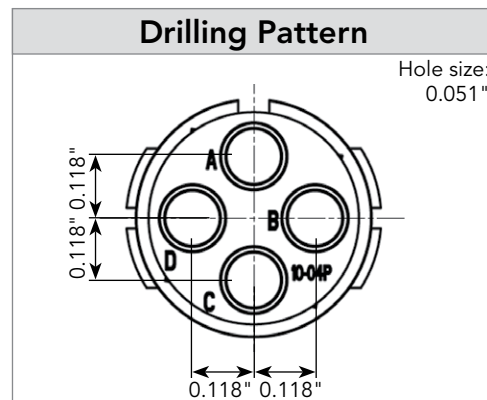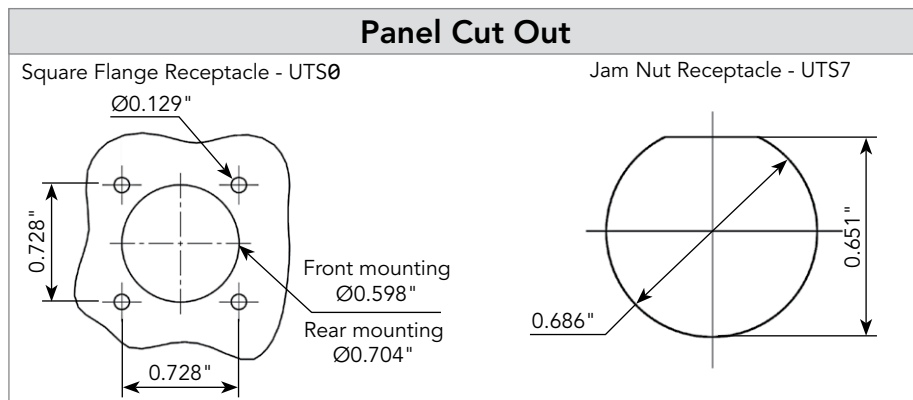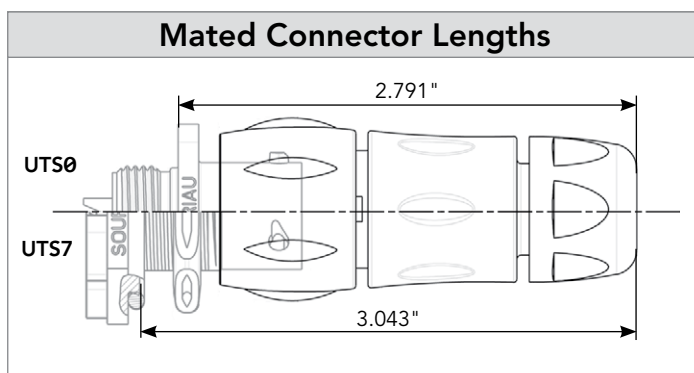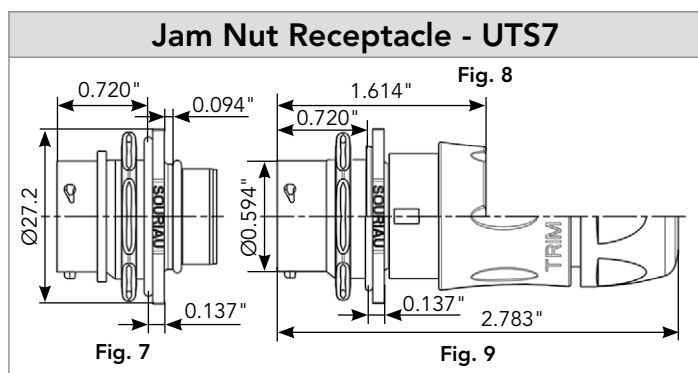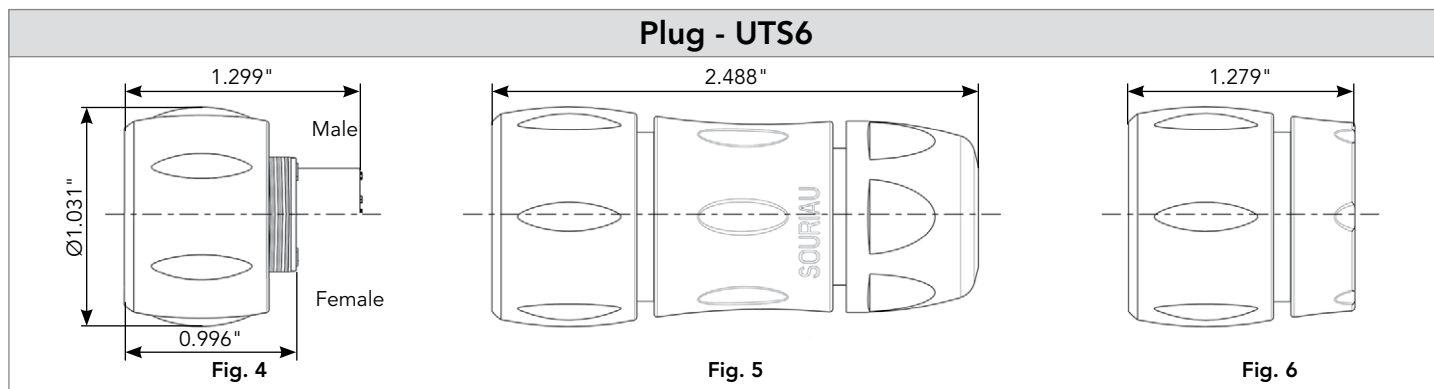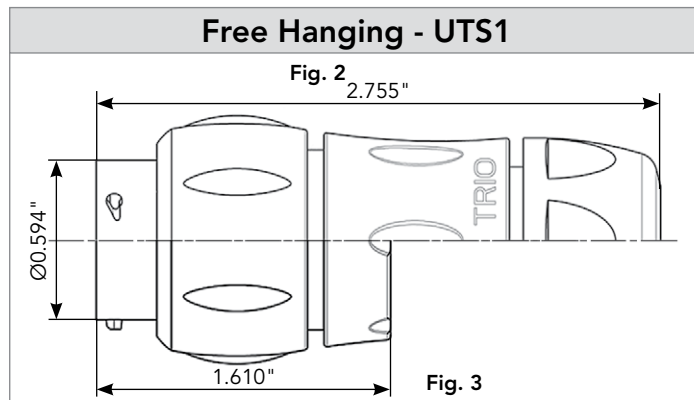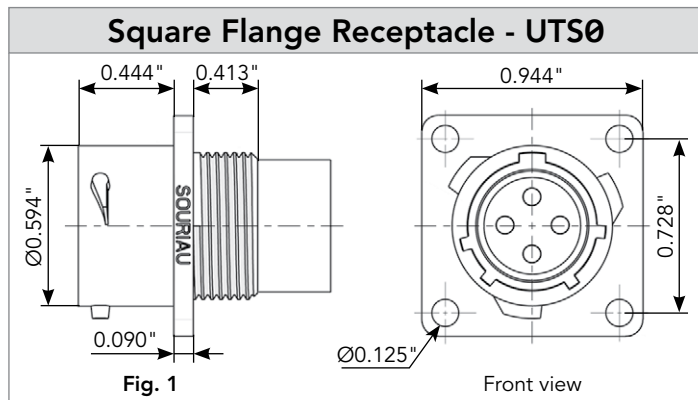

Note: Overmolded cable assembly dimensions available page 179.

Note: all dimensions are in inches



104 (Shell size 10, 4x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS10DCGE

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005586A      | 85005595 |

### Gasket



IP68/69K

Part numbers  
UTFD12B

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS710CCRR  | UTS610CCRR |
| UTS710CCRY  | UTS610CCRY |
| UTS710CCRG  | UTS610CCRG |

### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + yorK090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see p. 168

\* Heads to be used with handle PN: SHANGLES



Handle



Head



Complete set



## 104 (Shell size 10, 4x#16)

### Contacts

| #16         | Contact type                                                     | Wire size                 |                 | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm <sup>2</sup> | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08       | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20       | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52       | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52       | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.50       | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08       | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20       | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52       | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31       | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31       | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08            | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -               | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |                 | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |                 | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |                 | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |                 | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |                 | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

(3): For dimensions see page 168

Note: all dimensions are in inches


### Electrical Characteristics

**UL**  
10A 500V UL94 V-0


**CSA**  
7A 500V UL94 V-0

**IEC**  
13A 150V 2.5kV 3

### UTS 104 Derating Curves

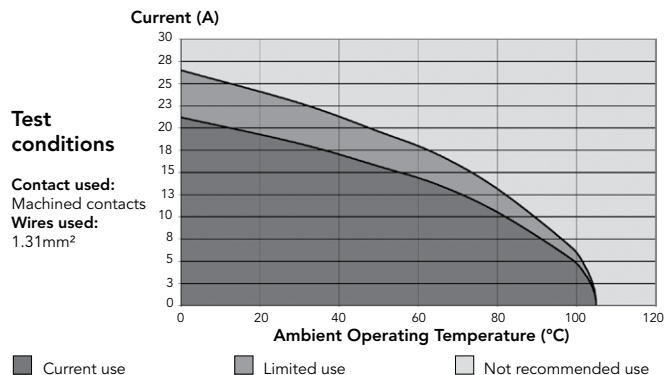

## 14E5/14D5 (Shell size 14, 5x#16)

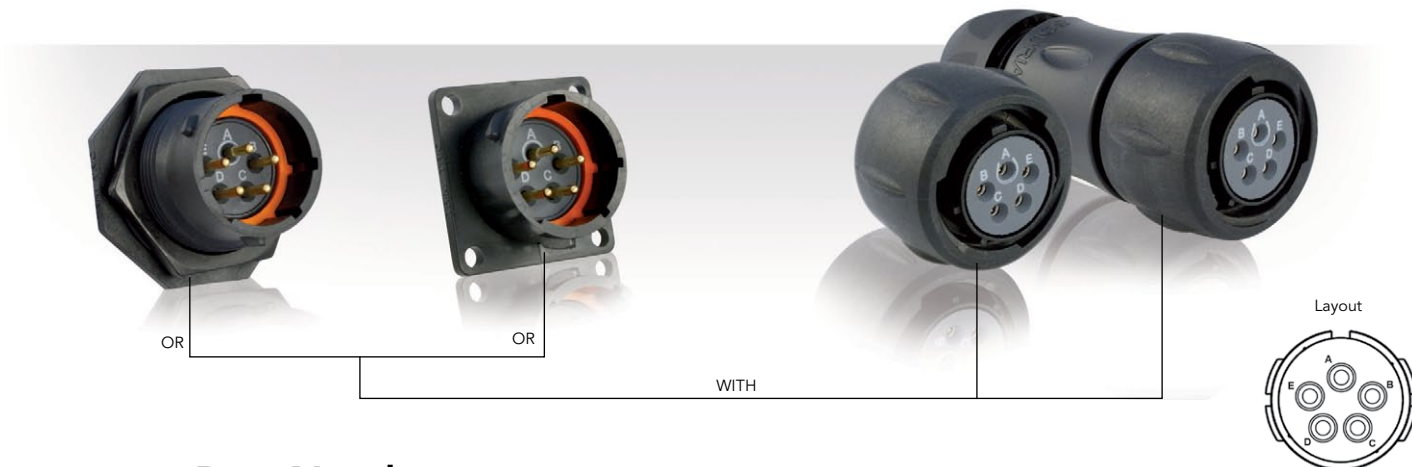

## Connector Part Numbers







| Contact type                                       | Connector type                                                | Backshell            | Part number        |                    |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                    |                                                               |                      | Male insert        | Female insert      |
| Hand solder electrical contacts loaded see page 75 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS014E5P</b>   | <b>UTS014E5S</b>   |
|                                                    | Plug                                                          | Without (Fig. 1)     | <b>UTS614E5P</b>   | <b>UTS614E5S</b>   |
|                                                    |                                                               | Cable gland (Fig. 2) | <b>UTS6JC14E5P</b> | <b>UTS6JC14E5S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS714E5P</b>   | <b>UTS714E5S</b>   |
| PCB contacts loaded see page 75                    | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS014D5P</b>   | <b>UTS014D5S</b>   |
|                                                    | Jam nut receptacle with hold down clips                       | Without (Fig. 5)     | <b>UTS714D5P32</b> | <b>UTS714D5S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 4)     | <b>UTS714D5P</b>   | <b>UTS714D5S</b>   |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

# 14E5/14D5 (Shell size 14, 5x#16)

## Dimensions

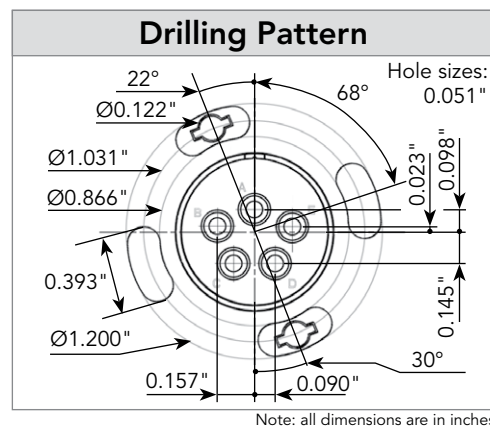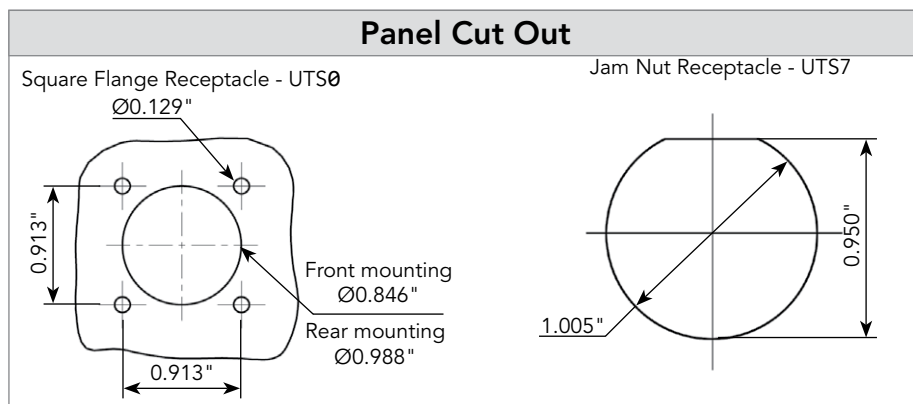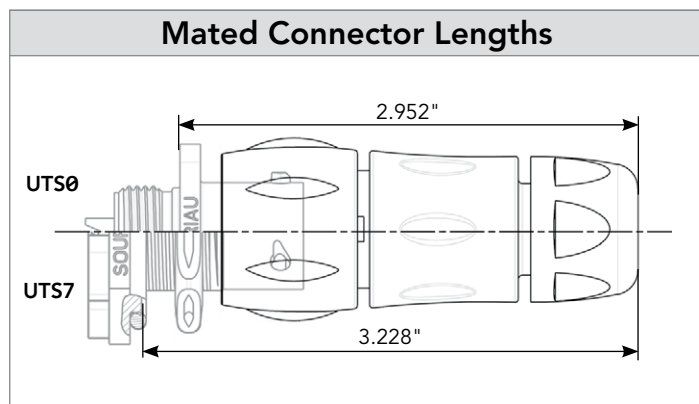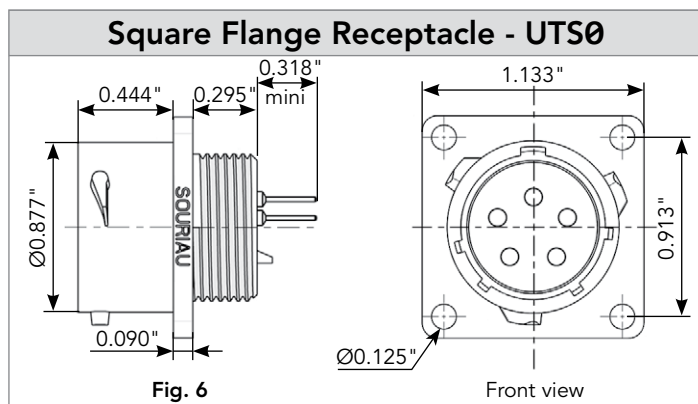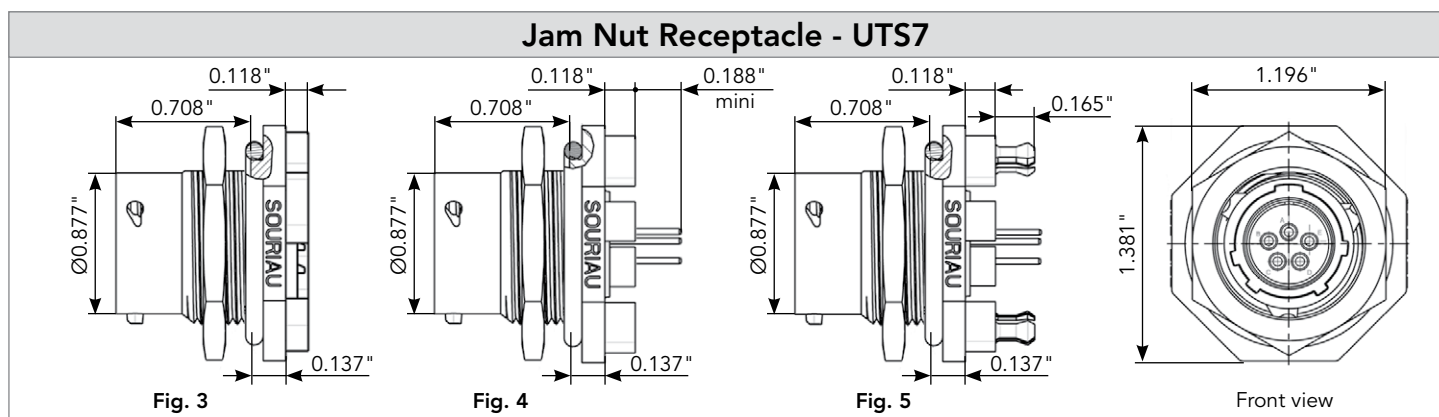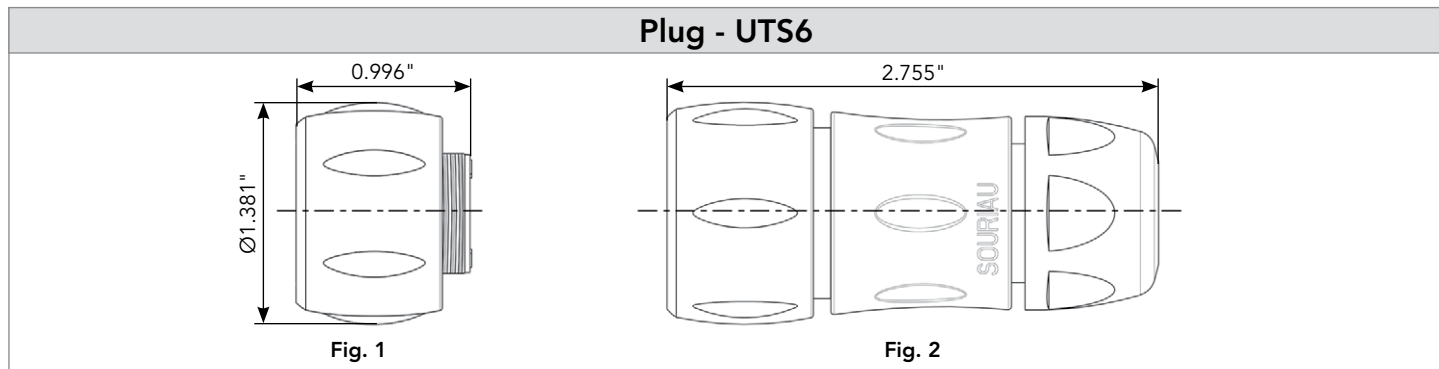

## 14E5/14D5 (Shell size 14, 5x#16)

### Accessories and Tooling

#### Jam Nut Sealing Caps



| Part number |
|-------------|
| UTS14DCG    |



| Part number |
|-------------|
| UTS14DCGR   |

#### Plug Sealing Cap



| Part number |
|-------------|
| UTS614DCG   |

#### Square Flange Sealing Cap



| Part number |
|-------------|
| UTS14DCGE   |

#### Plastic Protective Cap



##### Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005588A      | 85005597 |


#### Gasket



##### Part numbers

|         |
|---------|
| UTFD14B |
|---------|

#### Color Coding Rings



##### Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS714CCRR  | UTS614CCRR |
| UTS714CCRY  | UTS614CCRY |
| UTS714CCRG  | UTS614CCRG |

## 14E5/14D5 (Shell size 14, 5x#16)

### Contacts

| #16        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 18 to 14               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
12A 600V UL94 HB


**CSA**  
12A 600V UL94 HB

**IEC**  
16A 150V 2.5kV 3

#### UTS 14E5/14D5 Derating Curves

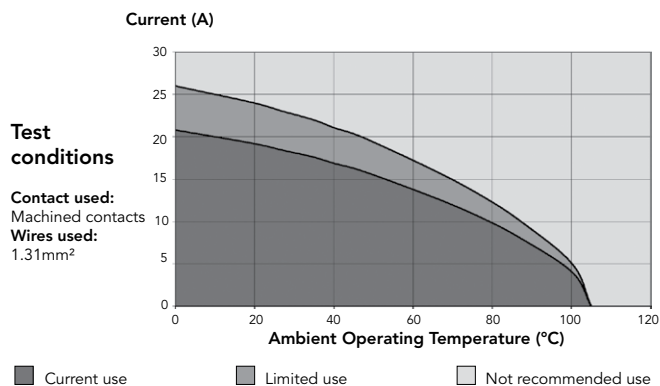

18X2M3 (Shell size 18, 3x#16, 2x#8)

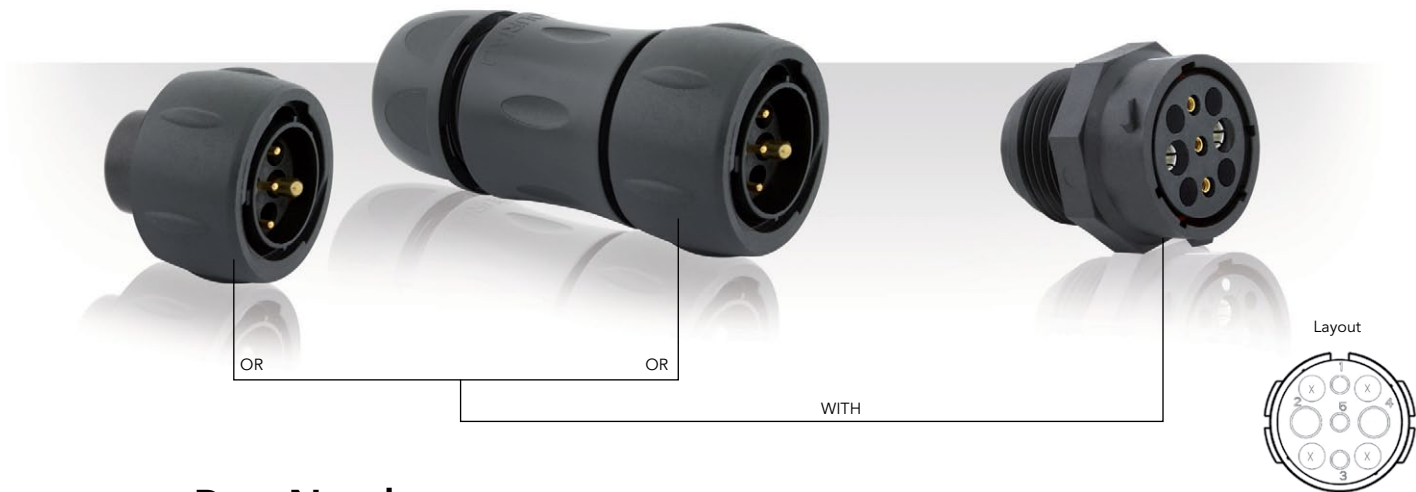

Connector Part Numbers

| Contact type                                   | Connector type               | Backshell            | Part number    |                |
|------------------------------------------------|------------------------------|----------------------|----------------|----------------|
|                                                |                              |                      | Male insert    | Female insert  |
| Crimp contacts supplied separately see page 79 | NPT 3/4" threaded receptacle | Without (Fig. 1)     | UTS718X2M3PNPT | UTS718X2M3SNPT |
|                                                | Plug                         | Without (Fig. 2)     | UTS618X2M3P    | UTS618X2M3S    |
|                                                | Plug                         | Cable gland (Fig. 3) | UTS6JC18X2M3P  | UTS6JC18X2M3S  |
| PCB contacts supplied separately see page 79   | NPT 3/4" threaded receptacle | Without (Fig. 1)     | UTS718X2M3PNPT | UTS718X2M3SNPT |

# 18X2M3 (Shell size 18, 3x#16, 2x#8)

## Dimensions

### NPT Threaded Receptacle - UTS7

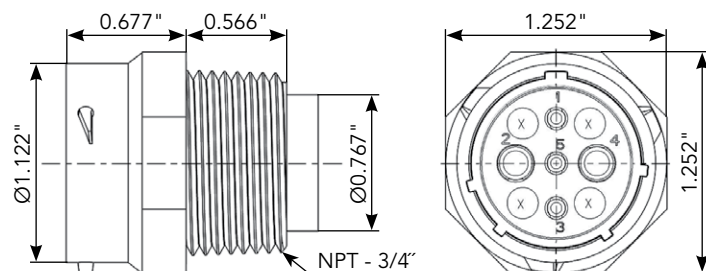


Fig. 1

### Plug - UTS6

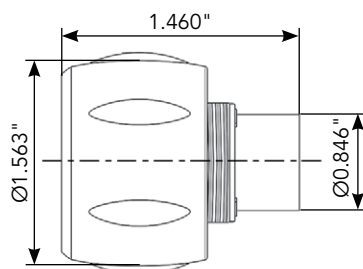


Fig. 2



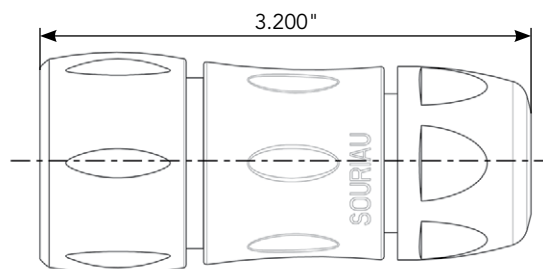


Fig. 3


### Mated Connector Length - UTS6JC

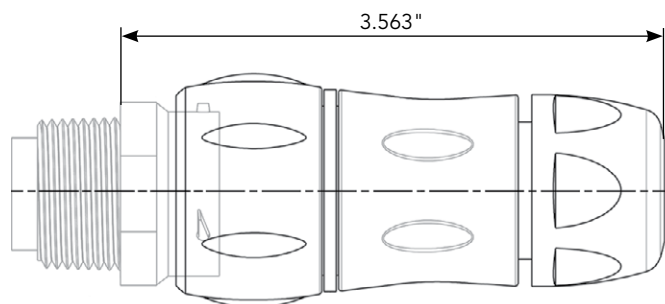

### Panel cut



### Drilling Pattern



#16  
Hole sizes:  
0.051"  
  
#8  
Hole sizes:  
0.129"

Note: all dimensions are in inches



# 18X2M3 (Shell size 18, 3x#16, 2x#8)

## Accessories and Tooling

### Jam Nut or NPT Threaded Receptacle Sealing Caps



IP68/69K

Part number

UTS18DCG



IP68/69K

Metal terminal

Part number

UTS18DCGR

RX2025GE1

### Plug Sealing Cap



IP68/69K

Part number

UTS618DCG

### Dummy Contact #16



Part number / Polyamide 6.6

SMSPK00

See page 208 for more information

### Plastic Protective Cap



Part numbers

Receptacle  
cap

Plug cap

85005590A

85005599

### Extraction Tool

RX2025GE1



51060210936

Part numbers

# 16

# 8

RX2025GE1

51060210936

### Crimp Tooling #16



Part number

SHANDLES



Part number

TOOLKIT



Contacts

Contact size

Part number  
of head

RM/RC 28M1K<sup>(1)</sup>

RM/RC 24M9K<sup>(1)</sup>

RM/RC 20M13K<sup>(1)</sup>

RM/RC 20M12K<sup>(1)</sup>

RM/RC 16M23K<sup>(1)</sup>

RM/RC 14M30K<sup>(1)</sup>

SM/SC 24ML1TK6<sup>(1)</sup>

SM/SC 20ML1TK6<sup>(1)</sup>

SM/SC 16ML1TK6<sup>(1)</sup>

SM/SC 14ML1TK6<sup>(1)</sup>

SM/SC 16ML11TK6<sup>(1)</sup>

RMDXK10D28K

RCDXK1D28K

RM/RC DX60xxD28K

RM/RC DXK10D28 +

york090

RM/RC DX60xxD28

Standard contacts

#16

Ø 1.6 mm

Coaxial contacts

S16RCM20\*

S16RCM20\*

S16RCM20\*

S16RCM20\*

S16RCM16\*

S16RCM14\*

S16SCM20\*

S16SCM20\*

S16SCML1\*

S16SCML1\*

S16SCML11\*

M10S1J

with die set

&amp; stop bushing

see page

202 to 205

(1): Example of plating, for other plating options see p. 168

\* Heads to be used with handle PN: SHANDLES

### Color Coding Rings

G for Green


Y for  
Yellow


R for Red



Part numbers

Receptacles

Plugs

UTS718CCRR

UTS618CCRR

UTS718CCRY

UTS618CCRY

UTS718CCRG

UTS618CCRG

### Crimp Tooling #8



Part number hand tool

M317


Part number  
positioner + locator setting

VGE10078A

# 18X2M3 (Shell size 18, 3x#16, 2x#8)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K                      | RC28M1K                      | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K                      | RC24M9K                      | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K                     | RC20M13K                     | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K                     | RC20M12K                     | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K                     | RC16M23K                     | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K                     | RC14M30K                     | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |
| #8          |                                                                  |                           |           |                              |                              |            |                 |
| Crimp       | Machined                                                         | 16                        | 1.31      | 82913601A                    | 82913600A                    | 0.067"     | 0.255"          |
|             |                                                                  | 14                        | 2.08      | 82913603A                    | 82913602A                    | 0.087"     |                 |
|             |                                                                  | 12                        | 3.31      | 82913605A                    | 82913604A                    | 0.111"     |                 |
|             |                                                                  | 10                        | 5.26      | 82913607A                    | 82913606A                    | 0.137"     |                 |
|             |                                                                  | 8                         | 8.37      | 82913609A                    | 82913608A                    | 0.171"     |                 |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | 82911685NPC <sup>(1)</sup>   | 82911684NPC <sup>(1)</sup>   | -          | -               |

(1): Example of plating, for other plating see page 168 (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6 (3): For dimensions see page 168 Note: all dimensions are in inches


### Electrical Characteristics

UL  
44A 600V UL94 V-0


CSA  
34A 600V UL94 V-0

IEC  
32A 300V 4kV 3

### UTS 18X2M3 Derating Curves

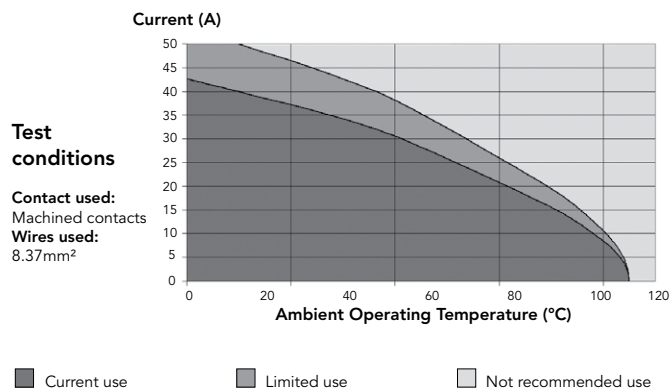

## 103W3 (Shell size 10, 3x#20, 3x#16)






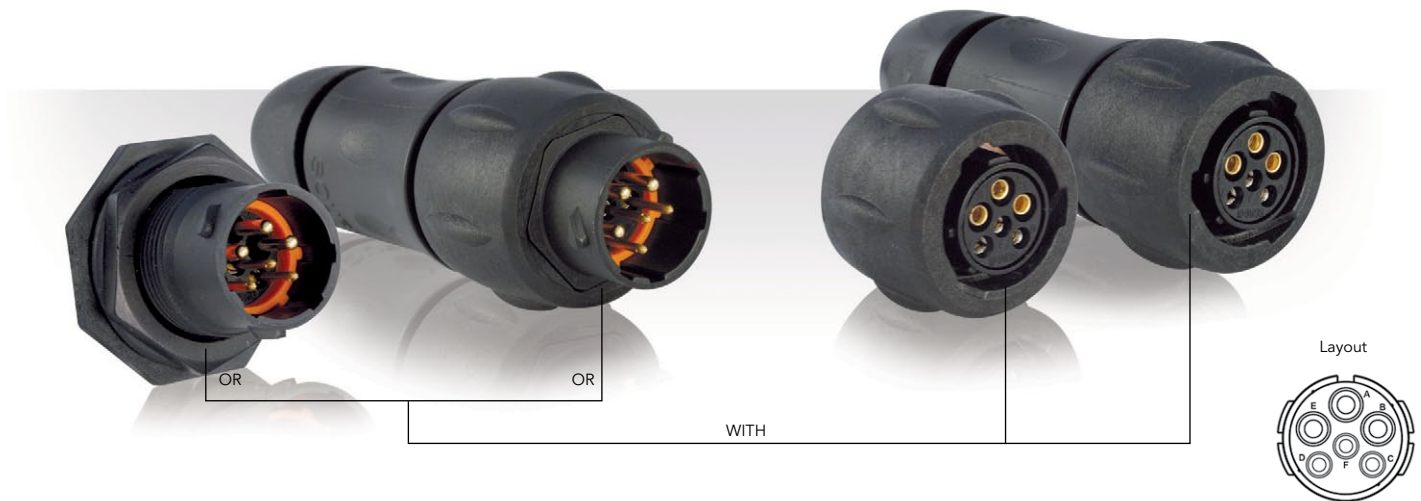


## Connector Part Numbers

| Contact type                                   | Connector type                                                | Backshell            | Part number         |                     |
|------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                |                                                               |                      | Male insert         | Female insert       |
| Crimp contacts supplied separately see page 83 | Free hanging receptacle                                       | Cable gland (Fig. 1) | <b>UTS1JC103W3P</b> | <b>UTS1JC103W3S</b> |
|                                                | Plug                                                          | Without (Fig. 2)     | <b>UTS6103W3P</b>   | <b>UTS6103W3S</b>   |
|                                                | Plug                                                          | Cable gland (Fig. 3) | <b>UTS6JC103W3P</b> | <b>UTS6JC103W3S</b> |
|                                                | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS7103W3P</b>   | <b>UTS7103W3S</b>   |
| PCB contacts supplied separately see page 83   | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 4)     | <b>UTS7103W3P</b>   | <b>UTS7103W3S</b>   |

# 103W3 (Shell size 10, 3x#20, 3x#16)

## Dimensions

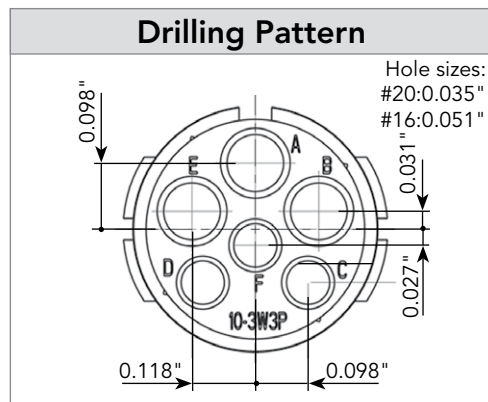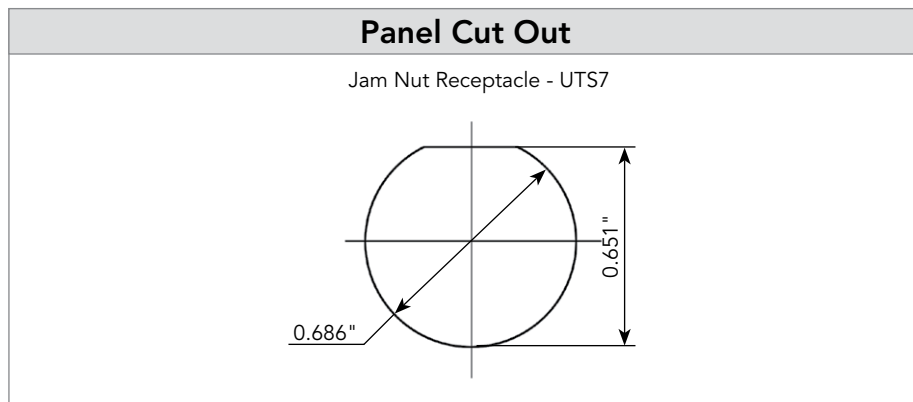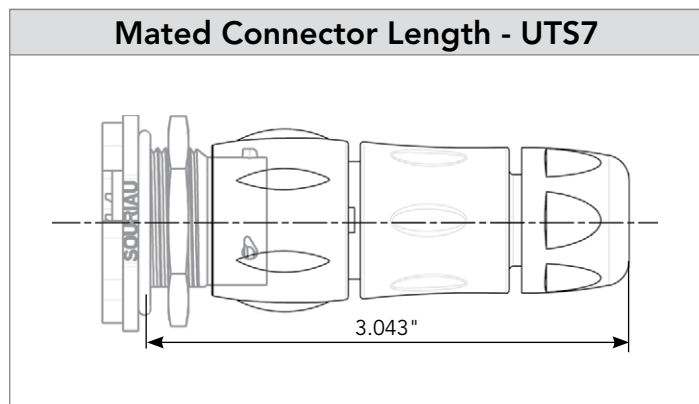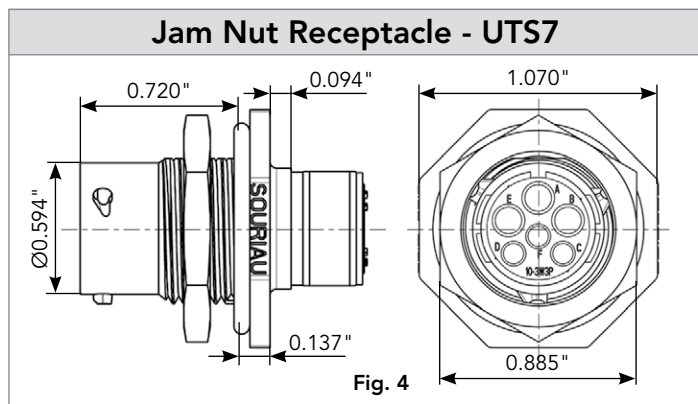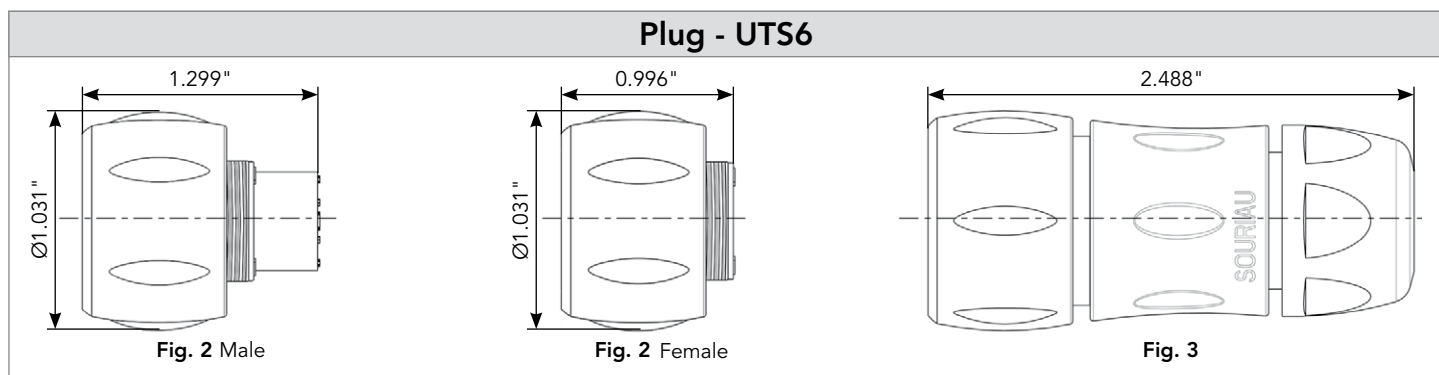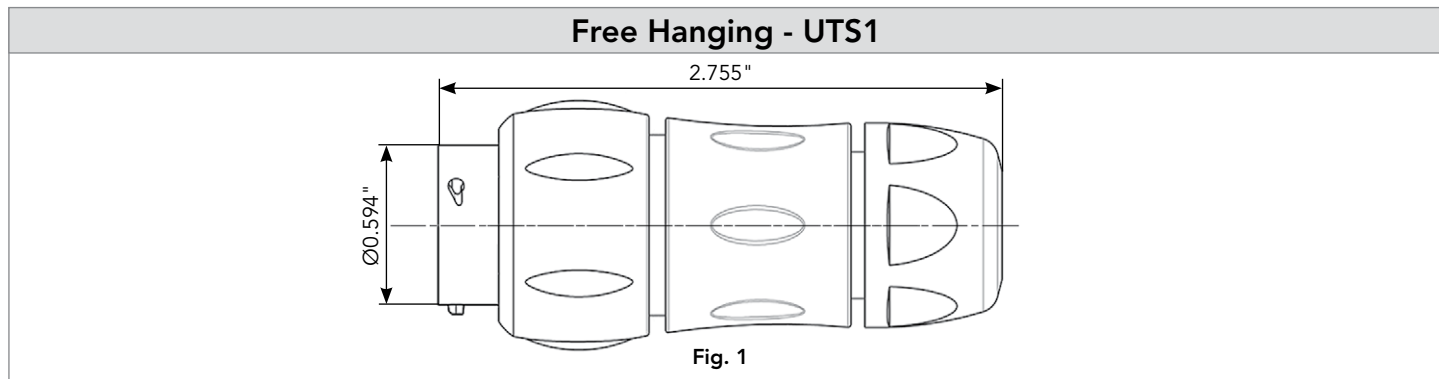

Note: all dimensions are in inches

# 103W3 (Shell size 10, 3x#20, 3x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

### Handle



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS10DCGE

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005586A      | 85005595 |


### Gasket



IP68/69K

Part numbers  
UTFD12B

### Color Coding Rings



Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS710CCRR  | UTS610CCRR |
| UTS710CCRY  | UTS610CCRY |
| UTS710CCRG  | UTS610CCRG |

### Crimp Tooling



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K                    | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K                    |                                      | S16RCM20*                                                          |
| RM/RC 20M13K                   |                                      | S16RCM20*                                                          |
| RM/RC 20M12K                   |                                      | S16RCM20*                                                          |
| RM/RC 16M23K                   |                                      | S16RCM16*                                                          |
| RM/RC 14M30K                   |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28                     | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28                      |                                      |                                                                    |
| RMDX60xxD28                    |                                      |                                                                    |
| RCDX60xxD28                    |                                      |                                                                    |
| RM/RC DXK10D28 + york090       |                                      |                                                                    |
| RM/RC 24W3K <sup>(1)</sup>     | Standard contacts<br>#20<br>Ø 1.0 mm | S20RCM*                                                            |
| RM/RC 20W3K <sup>(1)</sup>     |                                      | S20RCM*                                                            |
| RM/RC 18W3K <sup>(1)</sup>     |                                      | S20RCM*                                                            |
| SM/SC 24WL3S                   |                                      | S20SCM20*                                                          |
| SM/SC 20WL3S                   |                                      | S20SCM20*                                                          |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES

Extraction tool #16 (RX2025GE1) see page 179. Dummy contact (SMSPKE0) see page 208.

## 103W3 (Shell size 10, 3x#20, 3x#16)

### Contacts

| #16         | Contact type                                                     | Wire size                 |                 | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm <sup>2</sup> | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08       | RM28M1K                      | RC28M1K                      | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20       | RM24M9K                      | RC24M9K                      | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52       | RM20M13K                     | RC20M13K                     | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52       | RM20M12K                     | RC20M12K                     | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.50       | RM16M23K                     | RC16M23K                     | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08       | RM14M30K                     | RC14M30K                     | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20       | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52       | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31       | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31       | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08            | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -               | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |                 | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |                 | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |                 | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |                 | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |                 | RMP0F1000                    | RCPOF1000B                   | -          | -               |
| #20         |                                                                  |                           |                 |                              |                              |            |                 |
| Crimp       | Machined                                                         | 26-24                     | 0.13-0.20       | RM24W3K <sup>(1)</sup>       | RC24W3K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52       | RM20W3K <sup>(1)</sup>       | RC20W3K <sup>(1)</sup>       | 0.045"     | 0.062"          |
|             |                                                                  | 20-18                     | 0.50-0.93       | RM18W3K <sup>(1)</sup>       | RC18W3K <sup>(1)</sup>       | 0.051"     | 0.082"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20       | SM24W3TK6 <sup>(2)</sup>     | SC24W3TK6 <sup>(2)</sup>     | -          | 0.035"-0.062"   |
|             |                                                                  | 26-24                     | 0.13-0.20       | SM24W3S26 <sup>(2)</sup>     | SC24W3S25 <sup>(2)</sup>     | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52       | SM20W3TK6 <sup>(2)</sup>     | SC20W3TK6 <sup>(2)</sup>     | -          | 0.047"-0.082"   |
|             |                                                                  | 22-20                     | 0.32-0.52       | SM20W3S26 <sup>(2)</sup>     | SC20W3S25 <sup>(2)</sup>     | -          | 0.047"-0.082"   |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -               | RMW5016K                     | RCW5016K                     | -          | -               |

(1): Example of plating, for other plating see page 168 (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6 (3): For dimensions see page 168 Note: all dimensions are in inches


### Electrical Characteristics

UL  
10A 500V UL94 V-0

CSA  
7A 500V UL94 V-0


IEC  
5A 32V 1.5kV 3  
Temperature elevation: 50°C

### UTS 103W3 Derating Curves

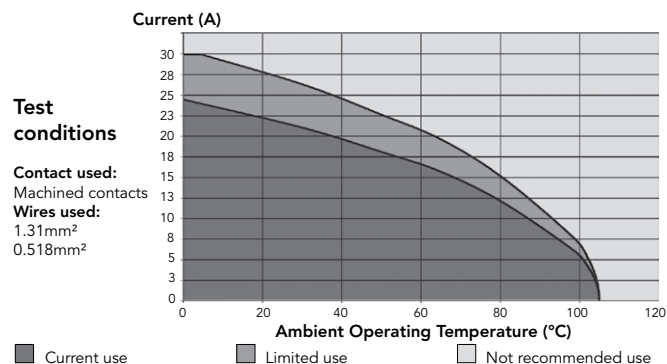



## 106 - 10E6/10D6 (Shell size 10, 6x#20)

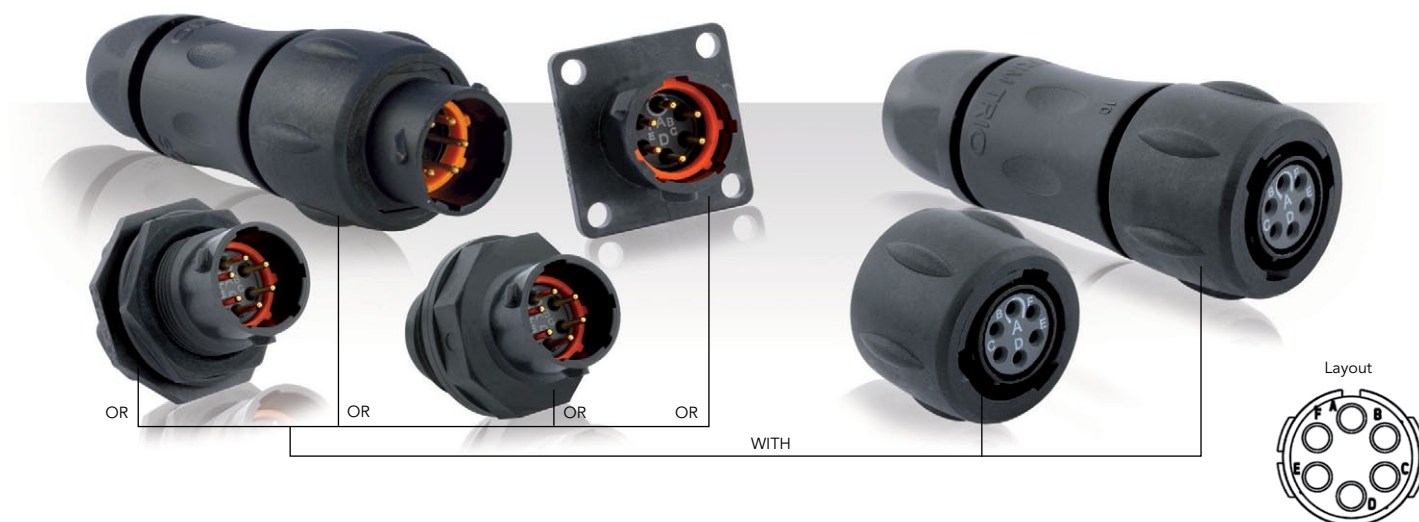

## Connector Part Numbers

| Contact type                                      | Connector type                                                | Backshell            | Part number         |                     |
|---------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                   |                                                               |                      | Male insert         | Female insert       |
| Crimp contacts supplied separately see page 87    | Free hanging receptacle                                       | Cable gland (Fig. 1) | <b>UTS1JC106P</b>   | <b>UTS1JC106S</b>   |
|                                                   | Plug                                                          | Without (Fig. 2)     | <b>UTS6106P</b>     | <b>UTS6106S</b>     |
|                                                   | Plug                                                          | Cable gland (Fig. 3) | <b>UTS6JC106P</b>   | <b>UTS6JC106S</b>   |
|                                                   | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS7106P</b>     | <b>UTS7106S</b>     |
| PCB contacts supplied separately see page 87      | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS7106P</b>     | <b>UTS7106S</b>     |
| Handsolder electrical contacts loaded see page 87 | Square flange receptacle                                      | Without (Fig. 10)    | <b>UTS010E6P</b>    | <b>UTS010E6S</b>    |
|                                                   | Plug                                                          | Without (Fig. 2)     | <b>UTS610E6P</b>    | <b>UTS610E6S</b>    |
|                                                   |                                                               | Cable gland (Fig. 3) | <b>UTS6JC10E6P</b>  | <b>UTS6JC10E6S</b>  |
|                                                   | Jam nut receptacle                                            | Without (Fig. 5)     | <b>UTS710E6P</b>    | <b>UTS710E6S</b>    |
| Handsolder electrical contacts loaded see page 87 | M16 threaded receptacle                                       | Without (Fig. 8)     | <b>UTS710E6PM16</b> | <b>UTS710E6SM16</b> |
| PCB contacts loaded see page 87                   | Square flange receptacle                                      | Without (Fig. 9)     | <b>UTS010D6P</b>    | <b>UTS010D6S</b>    |
|                                                   | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 7)     | <b>UTS710D6P32</b>  | <b>UTS710D6S32</b>  |
|                                                   | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 6)     | <b>UTS710D6P</b>    | <b>UTS710D6S</b>    |









Possibilities of discrimination/keying methods see page 208

Sealed unmated



# 106 - 10E6/10D6 (Shell size 10, 6x#20)

## Dimensions

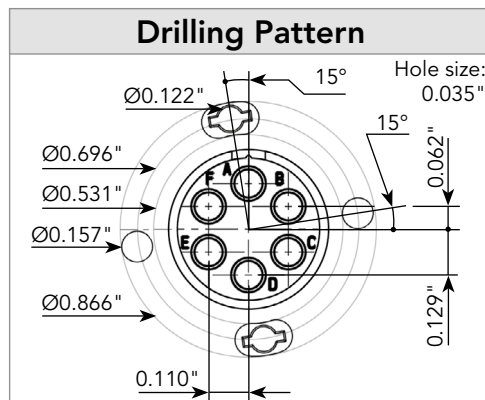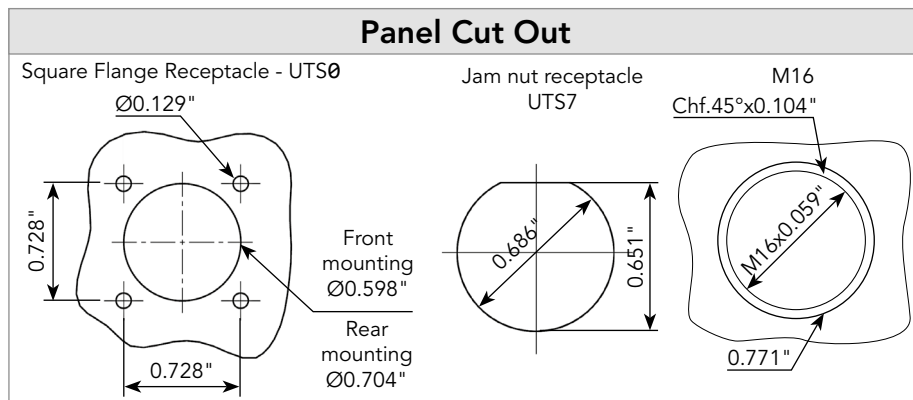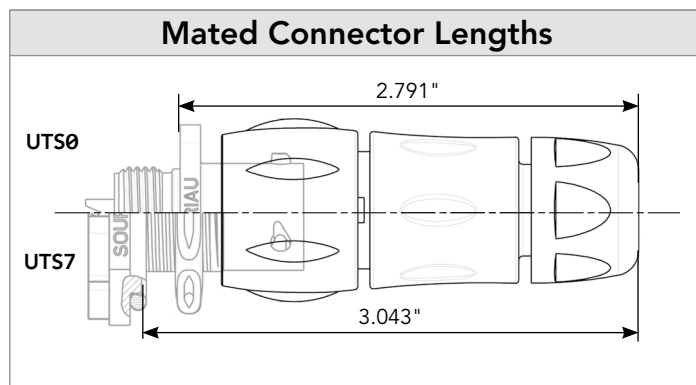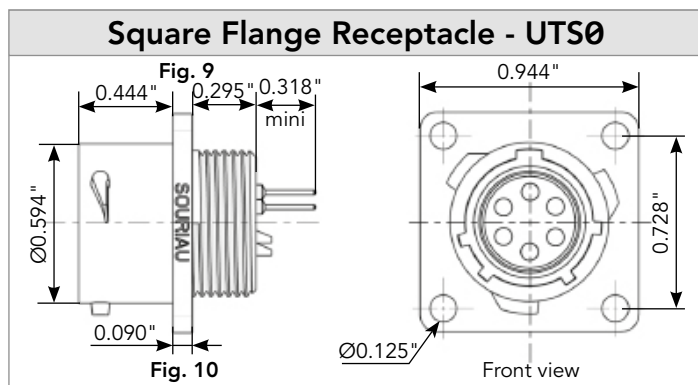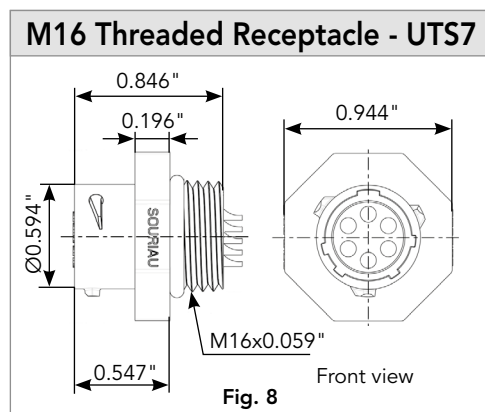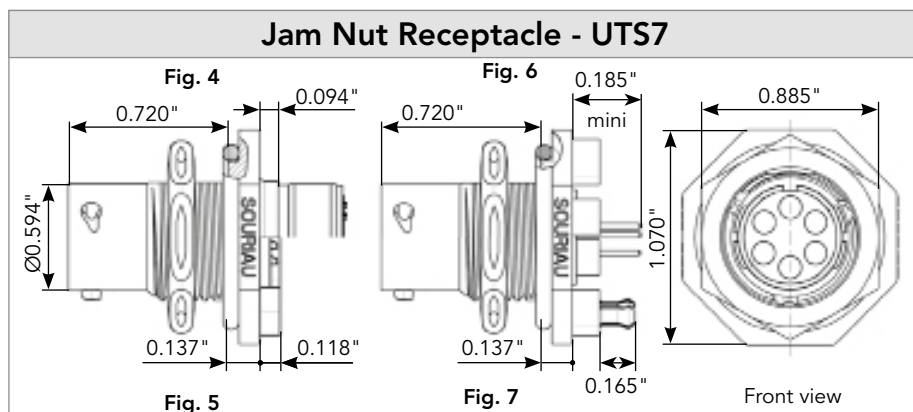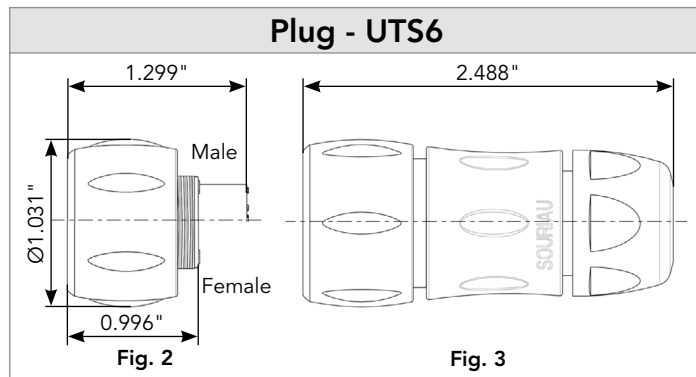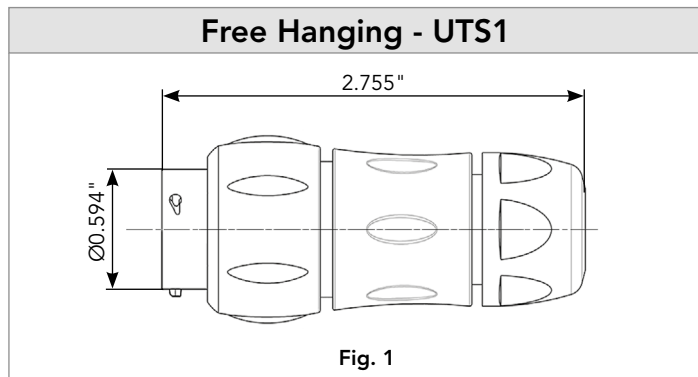

Note: all dimensions are in inches

# 106 - 10E6/10D6 (Shell size 10, 6x#20)

## Accessories and Tooling

### Jam Nut or M16 Threaded Receptacle Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS10DCGE

### Plastic Protective Cap



Part numbers

Receptacle  
cap  
85005586A

Plug cap  
85005595

### Gasket



IP68/69K

Part numbers  
UTFD12B

### Crimp Tooling (without Shandles)



| Contacts                   | Contact size                         | Part number of head |
|----------------------------|--------------------------------------|---------------------|
| RM/RC 24W3K <sup>(1)</sup> | Standard contacts<br>#20<br>Ø 1.0 mm | S20RCM*             |
| RM/RC 20W3K <sup>(1)</sup> |                                      | S20RCM*             |
| RM/RC 18W3K <sup>(1)</sup> |                                      | S20RCM*             |
| SM/SC 24WL3S               |                                      | S20SCM20*           |
| SM/SC 20WL3S               |                                      | S20SCM20*           |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES



Handle

+



Head

=



Complete set

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS710CCRR

UTS610CCRR

UTS710CCRY

UTS610CCRY

UTS710CCRG

UTS610CCRG

### Extraction Tool #20



Part number  
RX20D44

# 106 - 10E6/10D6 (Shell size 10, 6x#20)

## Contacts for 106

| #20   | Contact type                                                     | Wire size               |           | Part number              |                          | Max wire Ø | Max insulator Ø |
|-------|------------------------------------------------------------------|-------------------------|-----------|--------------------------|--------------------------|------------|-----------------|
|       |                                                                  | AWG                     | mm²       | Male                     | Female                   |            |                 |
| Crimp | Machined                                                         | 26-24                   | 0.13-0.20 | RM24W3K <sup>(1)</sup>   | RC24W3K <sup>(1)</sup>   | 0.031 "    | 0.062 "         |
|       |                                                                  | 22-20                   | 0.32-0.52 | RM20W3K <sup>(1)</sup>   | RC20W3K <sup>(1)</sup>   | 0.045 "    | 0.062 "         |
|       |                                                                  | 20-18                   | 0.52-0.80 | RM18W3K <sup>(1)</sup>   | RC18W3K <sup>(1)</sup>   | 0.051 "    | 0.082 "         |
|       | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                   | 0.13-0.20 | SM24W3TK6 <sup>(2)</sup> | SC24W3TK6 <sup>(2)</sup> | -          | 0.035 "-0.062 " |
|       |                                                                  | 26-24                   | 0.13-0.20 | SM24W3S26 <sup>(2)</sup> | SC24W3S25 <sup>(2)</sup> | -          | 0.035 "-0.062 " |
|       |                                                                  | 22-20                   | 0.32-0.52 | SM20W3TK6 <sup>(2)</sup> | SC20W3TK6 <sup>(2)</sup> | -          | 0.047 "-0.082 " |
|       |                                                                  | 22-20                   | 0.32-0.52 | SM20W3S26 <sup>(2)</sup> | SC20W3S25 <sup>(2)</sup> | -          | 0.047 "-0.082 " |
|       | PCB                                                              | Machined <sup>(3)</sup> | -         | -                        | RMW5016K                 | RCW5016K   | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 168

Note: all dimensions are in inches

6

## Contacts for 10E6/10D6


| #20         | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Hand solder | Loaded in the connector                          | Min 0.4µ gold over 0.8µ Ni | 22 to 18               | 0.196 "               |
| PCB         | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4µ gold over 0.8µ Ni | -                      | -                     |

(1): For dimensions see page 169


### Electrical Characteristics

|                                                 |                                                      |
|-------------------------------------------------|------------------------------------------------------|
| <b>UTS 106</b><br><b>UL</b><br>5A 250V UL94 V-0 | <b>UTS 10E6/10D6</b><br><b>UL</b><br>6A 250V UL94 HB |
| <b>CSA</b><br>4A 250V UL94 V-0                  | <b>CSA</b><br>6A 250V UL94 HB                        |
| <b>IEC</b><br>7A 32V 1.5kV 3                    |                                                      |

### UTS 106 - 10E6/10D6 Derating Curves

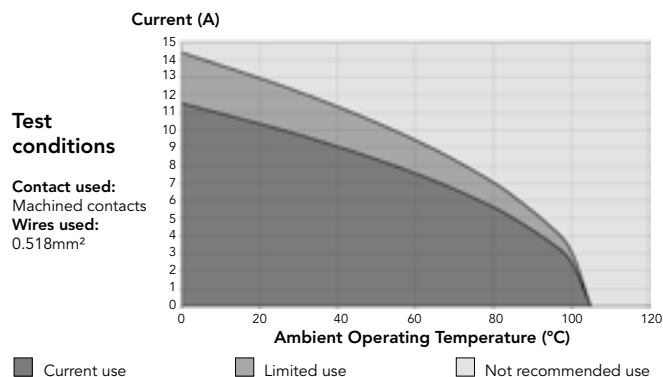

## 10E98/10D98 (Shell size 10, 6x#20)

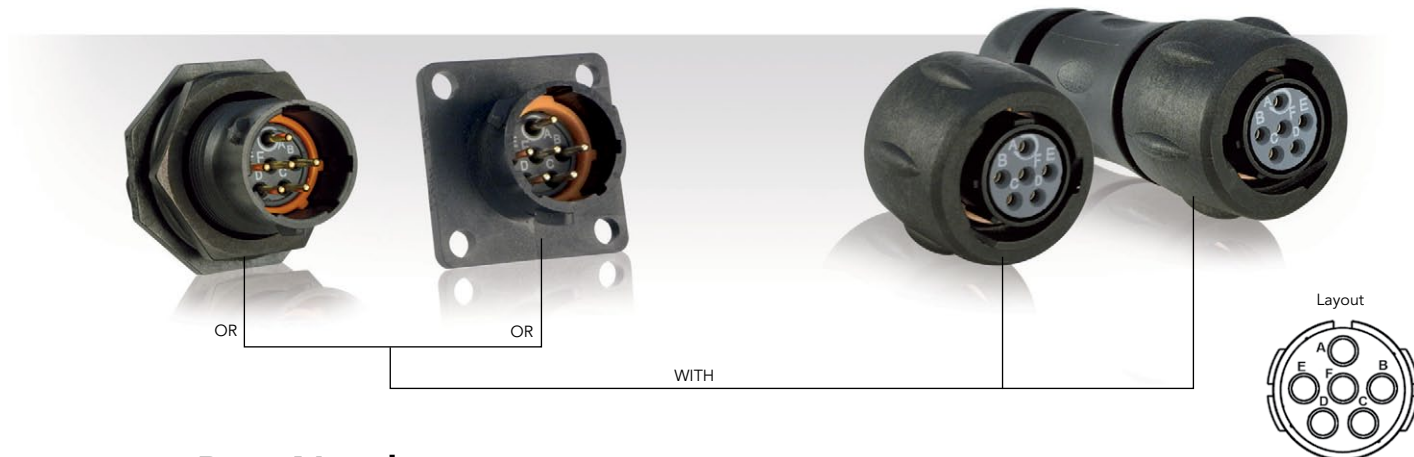

## Connector Part Numbers







| Contact type                                      | Connector type                                                | Backshell            | Part number         |                     |
|---------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                   |                                                               |                      | Male insert         | Female insert       |
| Handsolder electrical contacts loaded see page 91 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS010E98P</b>   | <b>UTS010E98S</b>   |
|                                                   | Plug                                                          | Without (Fig. 1)     | <b>UTS610E98P</b>   | <b>UTS610E98S</b>   |
|                                                   |                                                               | Cable gland (Fig. 2) | <b>UTS6JC10E98P</b> | <b>UTS6JC10E98S</b> |
|                                                   | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS710E98P</b>   | <b>UTS710E98S</b>   |
| PCB contacts loaded see page 91                   | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS010D98P</b>   | <b>UTS010D98S</b>   |
|                                                   | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | <b>UTS710D98P32</b> | <b>UTS710D98S32</b> |
|                                                   | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS710D98P</b>   | <b>UTS710D98S</b>   |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

# 10E98/10D98 (Shell size 10, 6x#20)

## Dimensions

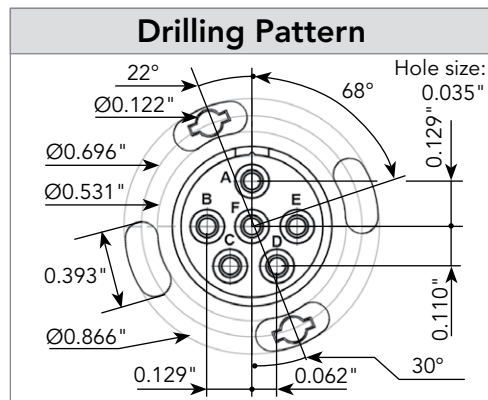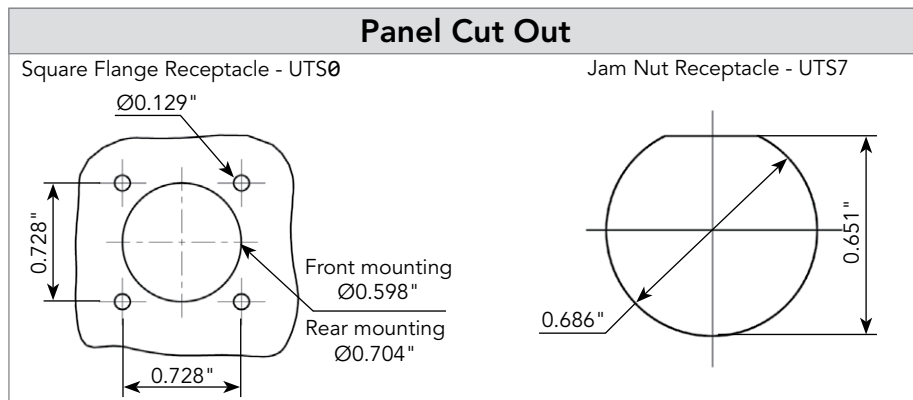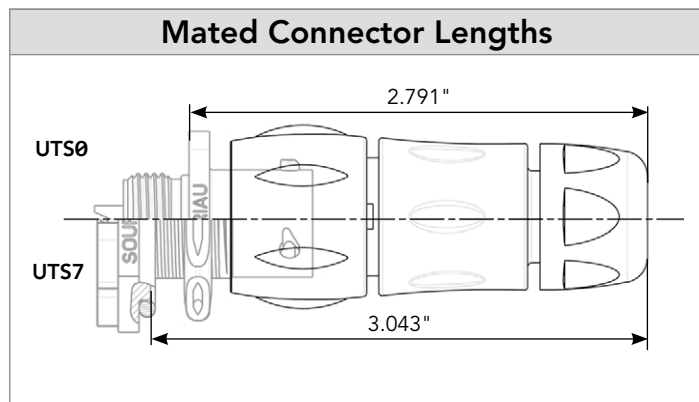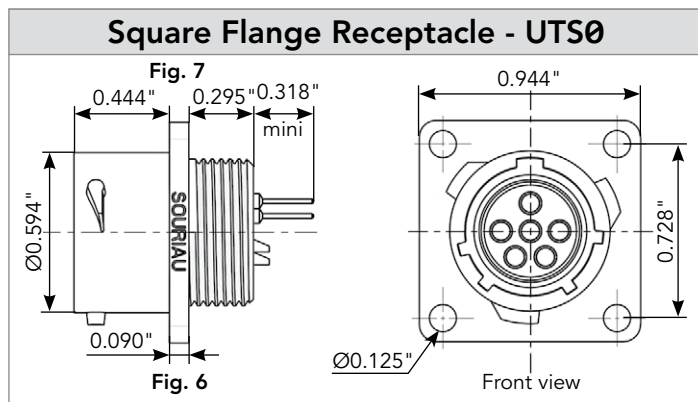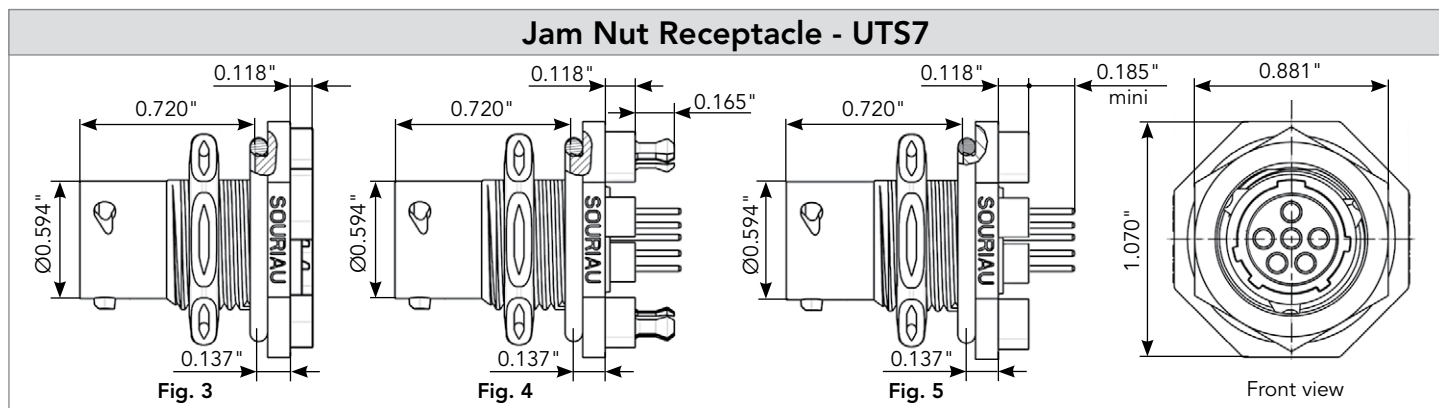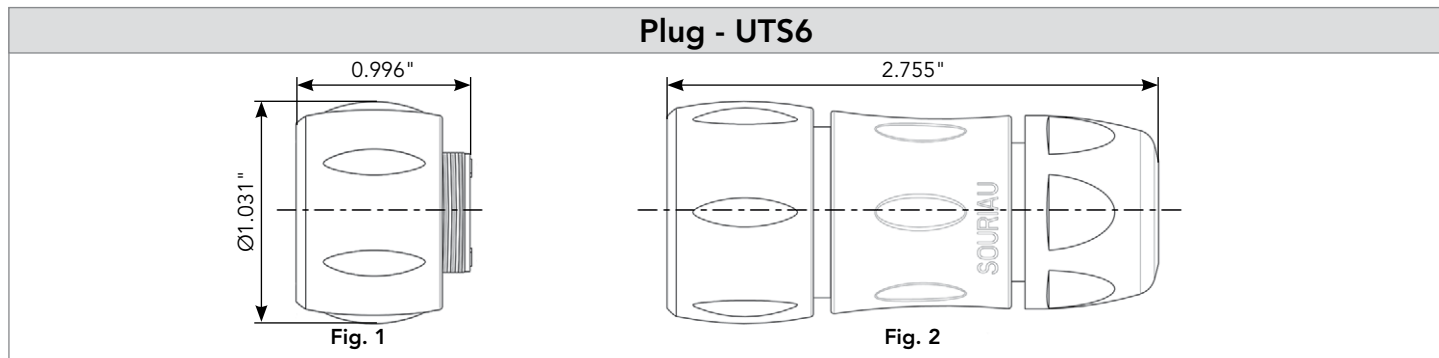

## 10E98/10D98 (Shell size 10, 6x#20)

### Accessories and Tooling

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS10DCG



IP68/69K

Metal terminal

Part number

UTS10DCGR

#### Plug Protective Cap



IP68/69K

Part number

UTS610DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS10DCGE

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005586A

Plug cap

85005595

#### Gasket



IP68/69K

Part numbers

UTFD12B

#### Color Coding Rings

G for Green


Y for  
Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS710CCRR

UTS610CCRR

UTS710CCRY

UTS610CCRY

UTS710CCRG

UTS610CCRG

## 10E98/10D98 (Shell size 10, 6x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
6A 250V UL94 HB

**CSA**  
6A 250V UL94 HB

**IEC**  
7A 50V 1.5kV 3

#### UTS 10E98/10D98 Derating Curves

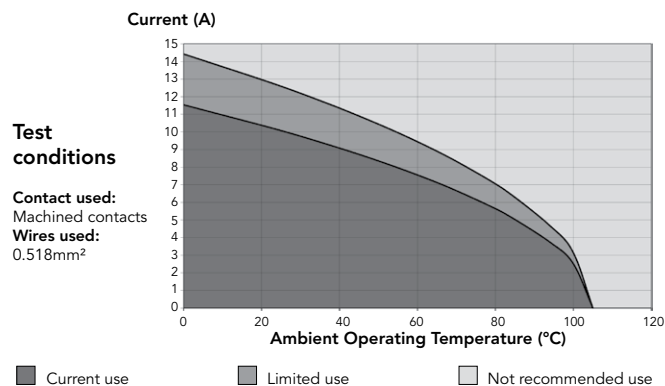



# 147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)



## Connector Part Numbers

| Contact type                                      | Connector type                                                | Backshell                          | Part number          |                      |
|---------------------------------------------------|---------------------------------------------------------------|------------------------------------|----------------------|----------------------|
|                                                   |                                                               |                                    | Male insert          | Female insert        |
| Crimp contacts supplied separately see page 95    | Square flange receptacle                                      | Without (Fig. 1)                   | <b>UTS0147P</b>      | <b>UTS0147S</b>      |
|                                                   | Free hanging receptacle                                       | Cable gland and grommet* (Fig. 4)  | <b>UTS1GJC147P</b>   | -                    |
|                                                   | Free hanging receptacle                                       | Nut and grommet* (Fig. 5)          | <b>UTS1GN147P</b>    | -                    |
|                                                   | Free hanging receptacle                                       | Cable gland (Fig. 4)               | <b>UTS1JC147P</b>    | <b>UTS1JC147S</b>    |
|                                                   | Plug                                                          | Without (Fig. 6)                   | <b>UTS6147P</b>      | <b>UTS6147S</b>      |
|                                                   | Plug                                                          | Cable gland and grommet* (Fig. 7)  | -                    | <b>UTS6GJC147S</b>   |
|                                                   | Plug                                                          | Nut and grommet* (Fig. 8)          | -                    | <b>UTS6GN147S</b>    |
|                                                   | Plug                                                          | Cable gland (Fig. 7)               | <b>UTS6JC147P</b>    | <b>UTS6JC147S</b>    |
|                                                   | Jam nut receptacle                                            | Without (Fig. 9)                   | <b>UTS7147P</b>      | <b>UTS7147S</b>      |
|                                                   | Jam nut receptacle                                            | Cable gland and grommet* (Fig. 11) | <b>UTS7GJC147P</b>   | -                    |
|                                                   | Jam nut receptacle                                            | Nut and grommet* (Fig. 10)         | <b>UTS7GN147P</b>    | -                    |
| PCB contacts supplied separately see page 95      | Jam nut receptacle with stand off and hold down clips         | Without (Fig. 12)                  | <b>UTS7147PSEK9</b>  | -                    |
| Screw contacts loaded                             | Jam nut receptacle                                            | Without (Fig. 9)                   | <b>UTS7147PSCR</b>   | <b>UTS7147SSCR</b>   |
|                                                   | Free hanging receptacle                                       | Cable gland (Fig. 4)               | <b>UTS1JC147PSCR</b> | -                    |
|                                                   | Plug                                                          | Cable gland (Fig. 6)               | <b>UTS6JC147PSCR</b> | <b>UTS6JC147SSCR</b> |
| Handsolder electrical contacts loaded see page 95 | Square flange receptacle                                      | Without (Fig. 3)                   | <b>UTS014E7P</b>     | <b>UTS014E7S</b>     |
|                                                   | Plug                                                          | Cable gland (Fig. 7)               | <b>UTS6JC14E7P</b>   | <b>UTS6JC14E7S</b>   |
|                                                   | Jam nut receptacle                                            | Without (Fig. 9)                   | <b>UTS714E7P</b>     | <b>UTS714E7S</b>     |
| PCB contacts loaded see page 95                   | Square flange receptacle                                      | Without (Fig. 2)                   | <b>UTS014D7P</b>     | <b>UTS014D7S</b>     |
|                                                   | Jam nut receptacle with stand off and hold down clips         | Without (Fig. 12)                  | <b>UTS714D7P32</b>   | <b>UTS714D7S32</b>   |
|                                                   | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 12)                  | <b>UTS714D7P</b>     | <b>UTS714D7S</b>     |


\* Grommet for discrete wire sealing

Sealed unmated


# 147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)

## Dimensions


### Square Flange Receptacle - UTS0

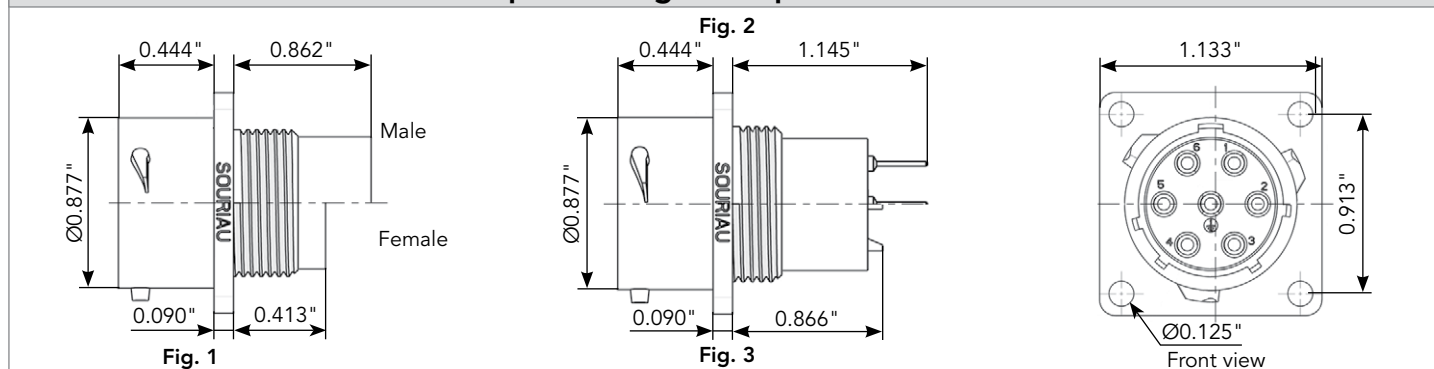


### Free Hanging - UTS1

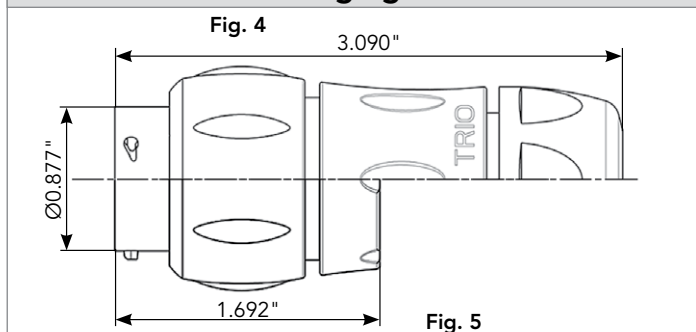


### Plug - UTS6

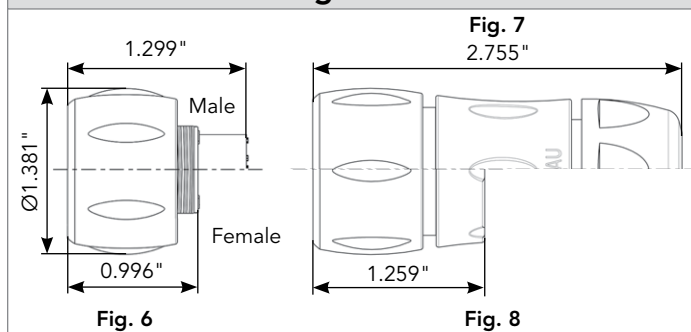


### Jam Nut Receptacle - UTS7

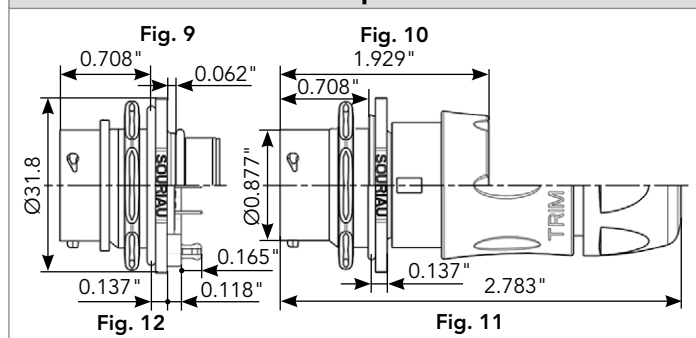


### Mated Connector Lengths

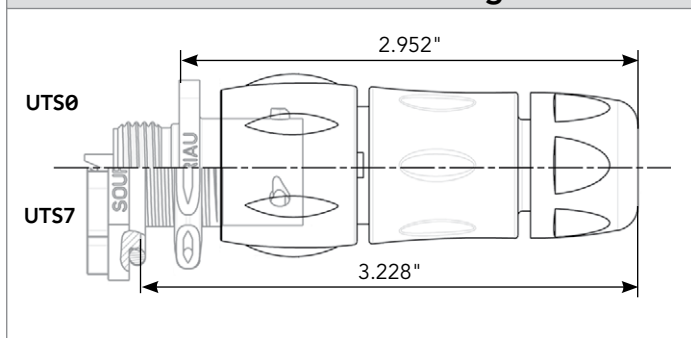

### Panel Cut Out

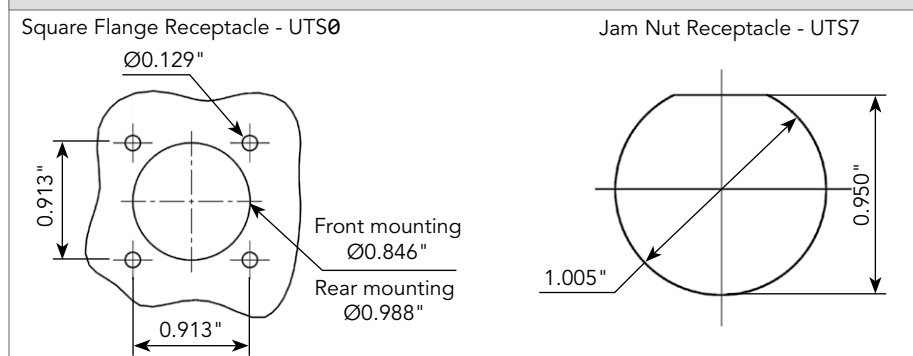

### Drilling Pattern

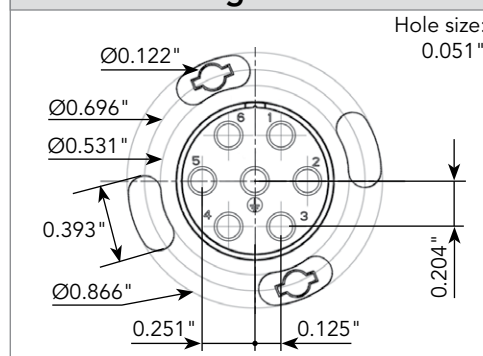

Note: all dimensions are in inches

# 147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS14DCG



IP68/69K

Metal terminal

Part number  
UTS14DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS14DCGE

### Plastic Protective Cap



Part numbers

Receptacle  
cap  
85005588A

Plug cap  
85005597

### Gasket



IP68/69K

Part numbers  
UTFD14B


### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 +<br>york090    |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see page 164  
\* Heads to be used with handle PN: SHANDLES

### Color Coding Rings



Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG



Handle



Head



Complete set

# 147 - 14E7/14D7 (Shell size 14, 6 + ground, 7x#16)

## Contacts for 147

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMP0F1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 168 (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6 (3): For dimensions see page 168 Note: all dimensions are in inches

## Contacts for 14E7/14D7


| #16         | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Hand-solder | Loaded in the connector                          | Min 0.4µ gold over 0.8µ Ni | 18 to 14               | 0.196"                |
| PCB         | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4µ gold over 0.8µ Ni | -                      | -                     |

(1): For dimensions see page 169


### Electrical Characteristics

|                                                             |                                                       |
|-------------------------------------------------------------|-------------------------------------------------------|
| <b>UTS 147</b><br><b>UL</b><br>10A 500V UL94 V-0            | <b>UTS 14E7/14D7</b><br><b>UL</b><br>10A 500V UL94 HB |
| <b>CSA</b><br>7A 500V UL94 V-0                              | <b>CSA</b><br>7A 500V UL94 HB                         |
| <b>IEC</b><br>16A 300V 4kV 3<br>Temperature elevation: 50°C |                                                       |

### UTS 147 - 14E7/14D7 Derating Curves

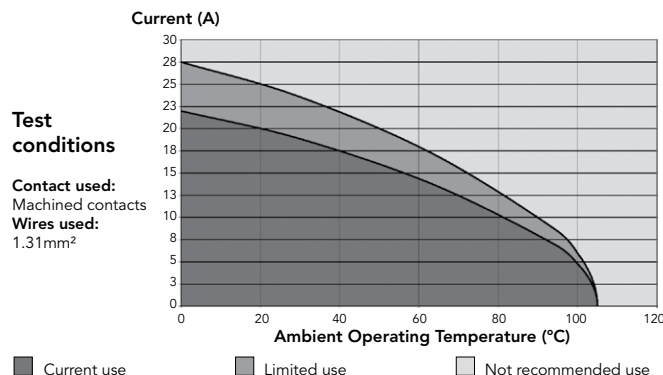

## 10E7/10D7 (Shell size 10, 7x#20)

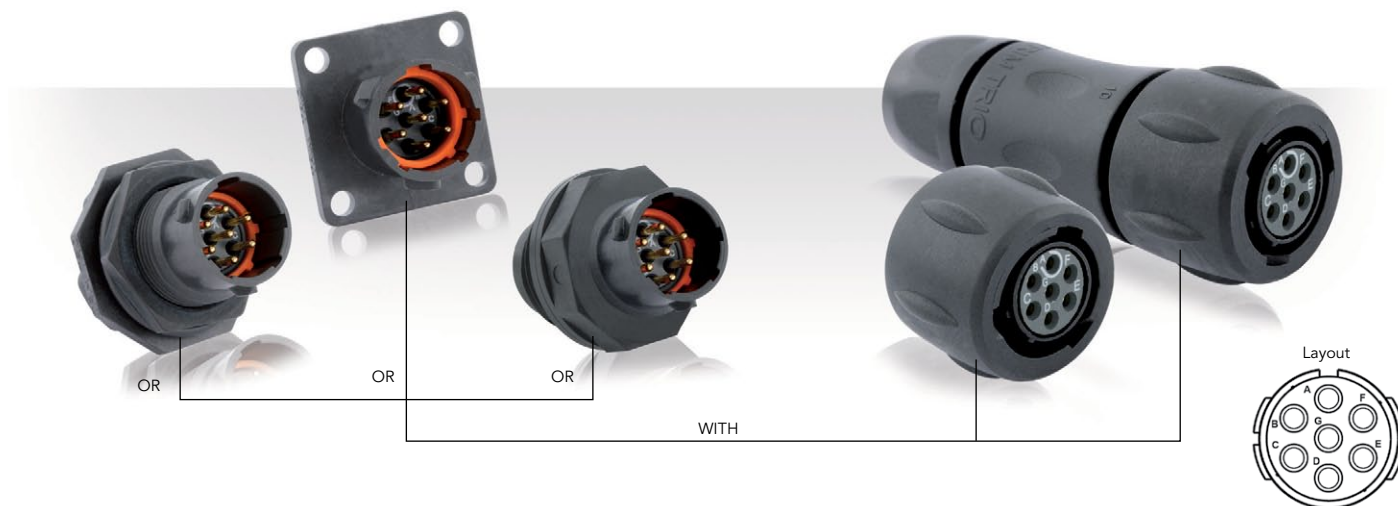

## Connector Part Numbers

| Contact type                                       | Connector type                                                | Backshell            | Part number         |                     |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                    |                                                               |                      | Male insert         | Female insert       |
| Hand solder electrical contacts loaded see page 99 | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS010E7P</b>    | <b>UTS010E7S</b>    |
|                                                    | Plug                                                          | Without (Fig. 2)     | <b>UTS610E7P</b>    | <b>UTS610E7S</b>    |
|                                                    |                                                               | Cable gland (Fig. 3) | <b>UTS6JC10E7P</b>  | <b>UTS6JC10E7S</b>  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS710E7P</b>    | <b>UTS710E7S</b>    |
| PCB contacts loaded see page 99                    | M16 threaded receptacle                                       | Without (Fig. 7)     | <b>UTS710E7PM16</b> | <b>UTS710E7SM16</b> |
|                                                    | Square flange receptacle                                      | Without (Fig. 1)     | <b>UTS010D7P</b>    | <b>UTS010D7S</b>    |
|                                                    | Jam nut receptacle with stand off and hold down clips         | Without (Fig. 5)     | <b>UTS710D7P32</b>  | <b>UTS710D7S32</b>  |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 6)     | <b>UTS710D7P</b>    | <b>UTS710D7S</b>    |








Possibilities of discrimination/keying methods see page 208

Sealed unmated



# 10E7/10D7 (Shell size 10, 7x#20)

## Dimensions

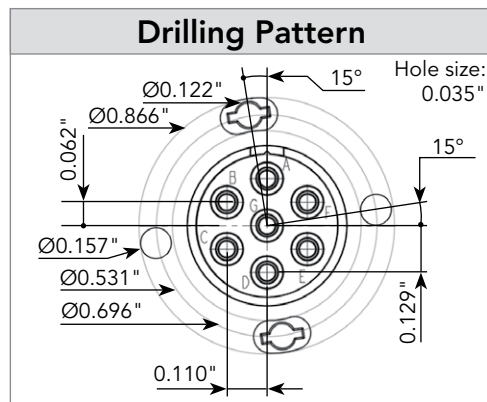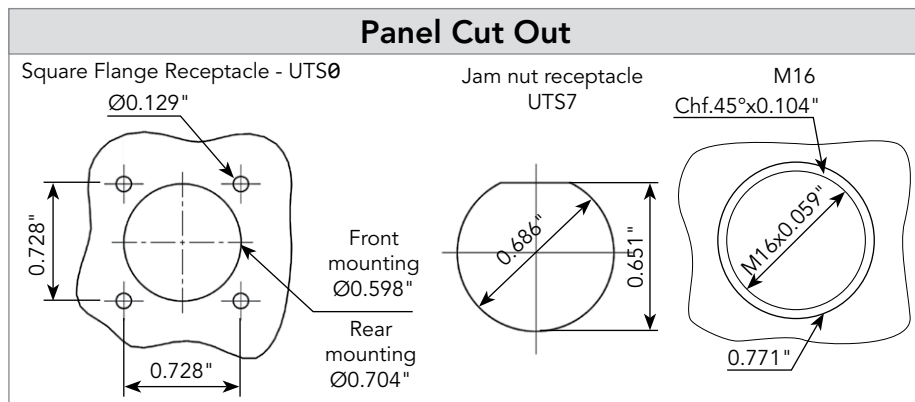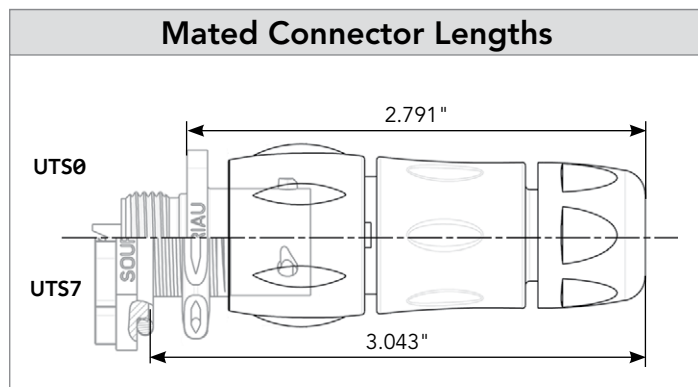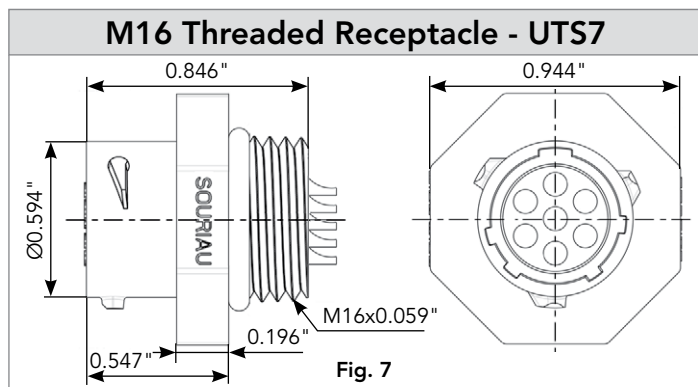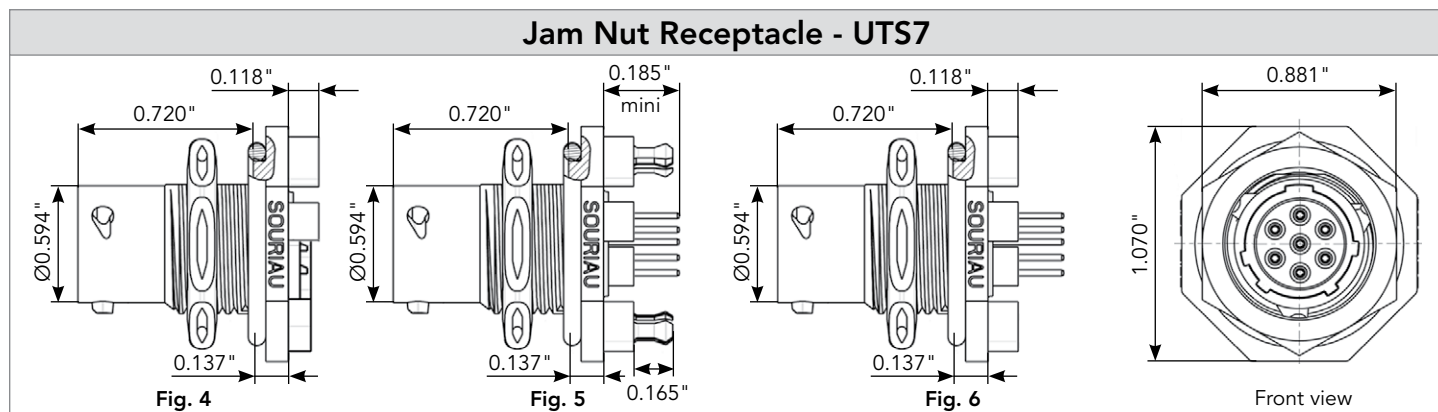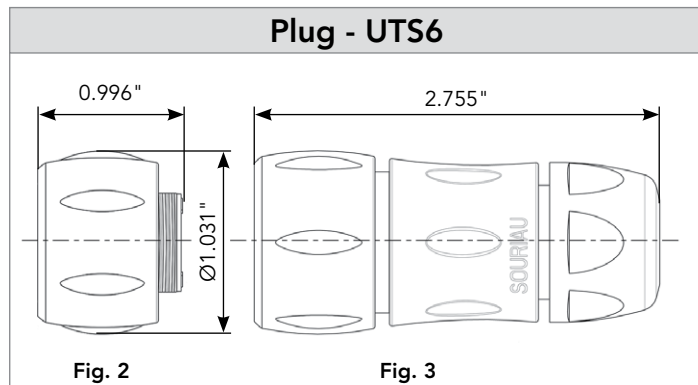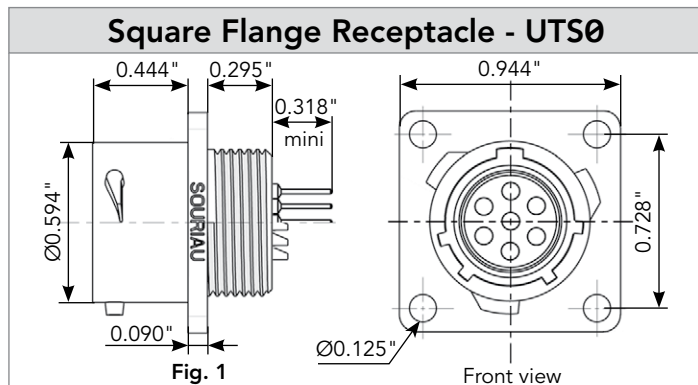

Note: all dimensions are in inches

## 10E7/10D7 (Shell size 10, 7x#20)

### Accessories and Tooling

#### Jam Nut or M16 Threaded Receptacle Sealing Caps



IP68/69K

Part number  
UTS10DCG



IP68/69K

Metal terminal

Part number  
UTS10DCGR

#### Plug Sealing Cap



IP68/69K

Part number  
UTS610DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS10DCGE

#### Plastic Protective Cap



##### Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005586A      | 85005595 |

#### Gasket



IP68/69K

##### Part numbers

UTFD12B

#### Color Coding Rings

G for Green



Y for Yellow



R for Red



##### Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS710CCRR  | UTS610CCRR |
| UTS710CCRY  | UTS610CCRY |
| UTS710CCRG  | UTS610CCRG |



## 10E7/10D7 (Shell size 10, 7x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
6A 250V UL94 HB

**CSA**  
6A 250V UL94 HB

**IEC**  
7A 50V 1.5kV 3

#### UTS 10E7/10D7 Derating Curves

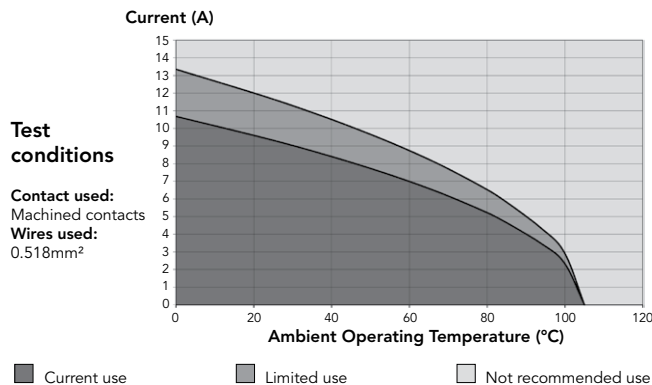

## UTS Series | Connector

**128** (Shell size 12, 8x#16)



### Connector Part Numbers

| Contact type                                             | Connector type                                        | Backshell                          | Part number           |                       |
|----------------------------------------------------------|-------------------------------------------------------|------------------------------------|-----------------------|-----------------------|
|                                                          |                                                       |                                    | Male insert           | Female insert         |
| Crimp<br>contacts supplied<br>separately<br>see page 103 | Square flange receptacle                              | Without (Fig. 1)                   | <b>UTS0128P</b>       | <b>UTS0128S</b>       |
|                                                          | Free hanging receptacle                               | Cable gland and grommet* (Fig. 2)  | <b>UTS1GJC128P</b>    | -                     |
|                                                          | Free hanging receptacle                               | Nut and grommet* (Fig. 3)          | <b>UTS1GN128P</b>     | -                     |
|                                                          | M20 threaded receptacle                               | Gasket and nut (Fig. 8)            | <b>UTS7128PM20NUT</b> | <b>UTS7128SM20NUT</b> |
|                                                          |                                                       | Gasket (Fig. 9)                    | <b>UTS7128PM20</b>    | <b>UTS7128SM20</b>    |
|                                                          | Free hanging receptacle                               | Cable gland (Fig. 2)               | <b>UTS1JC128P</b>     | <b>UTS1JC128S</b>     |
|                                                          | Plug                                                  | Without (Fig. 10)                  | <b>UTS6128P</b>       | <b>UTS6128S</b>       |
|                                                          | Plug                                                  | Cable gland and grommet* (Fig. 11) | -                     | <b>UTS6GJC128S</b>    |
|                                                          | Plug                                                  | Nut and grommet* (Fig. 12)         | -                     | <b>UTS6GN128S</b>     |
|                                                          | Plug                                                  | Cable gland (Fig. 11)              | <b>UTS6JC128P</b>     | <b>UTS6JC128S</b>     |
|                                                          | Jam nut receptacle                                    | Without (Fig. 4)                   | <b>UTS7128P</b>       | <b>UTS7128S</b>       |
|                                                          | Jam nut receptacle                                    | Cable gland and grommet* (Fig. 7)  | <b>UTS7GJC128P</b>    | -                     |
|                                                          | Jam nut receptacle                                    | Nut and grommet* (Fig. 6)          | <b>UTS7GN128P</b>     | -                     |
| PCB<br>contacts loaded see page 103                      | Jam nut receptacle with stand off and hold down clips | Without (Fig. 5)                   | <b>UTS7128PSEK9</b>   | -                     |

Possibilities of discrimination/keying methods see page 208

\* Grommet for discrete wire sealing








### Overmolded Cable Assembly Part Numbers

| Overmolding type                      | Description                              | Wire size | Part number (length: 3 ft)* |
|---------------------------------------|------------------------------------------|-----------|-----------------------------|
| Overmolded harnesses, straight ending | D/E assembly 1 male plug & 1 female plug | 16 AWG    | <b>UTS6V1208PS03FT00</b>    |
|                                       | S/E assembly 1 female plug               | 16 AWG    | <b>UTS6V1208S03FT00</b>     |
|                                       | S/E assembly 1 male plug                 | 16 AWG    | <b>UTS6V1208P03FT00</b>     |

\* Other lengths available: 3, 6, 12 feet only: e.g. UTS6V1208PS06FT00 for a 6 feet version

128 (Shell size 12, 8x#16)

## Dimensions

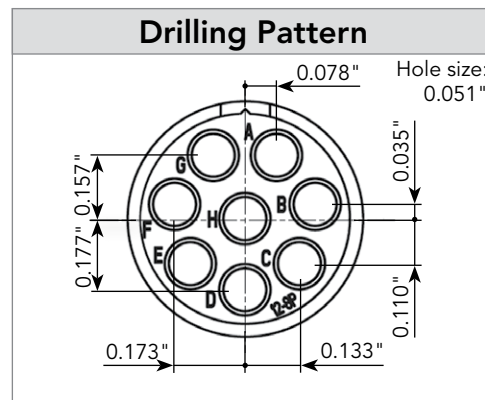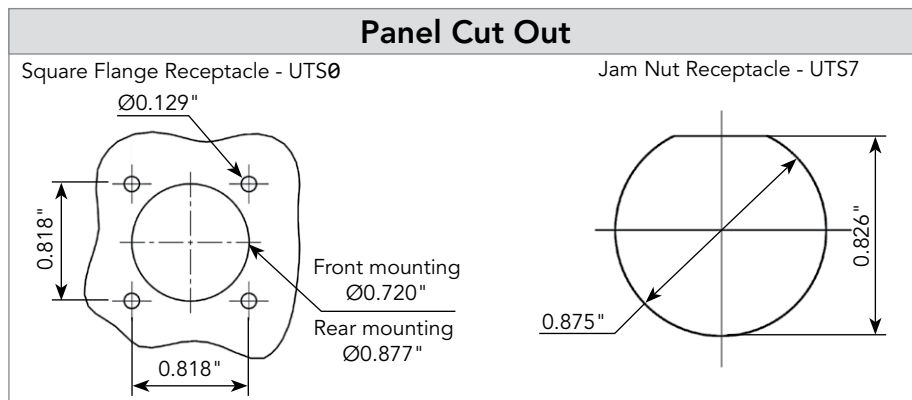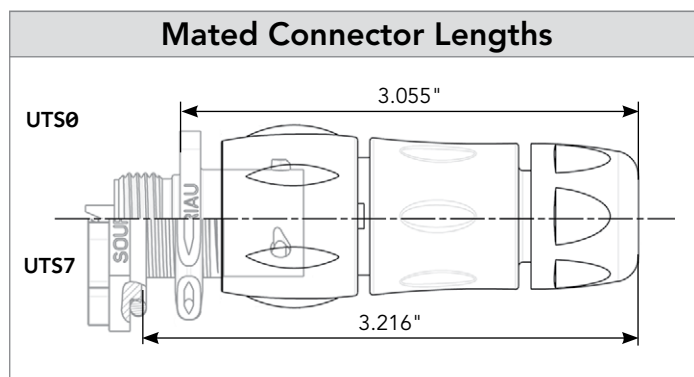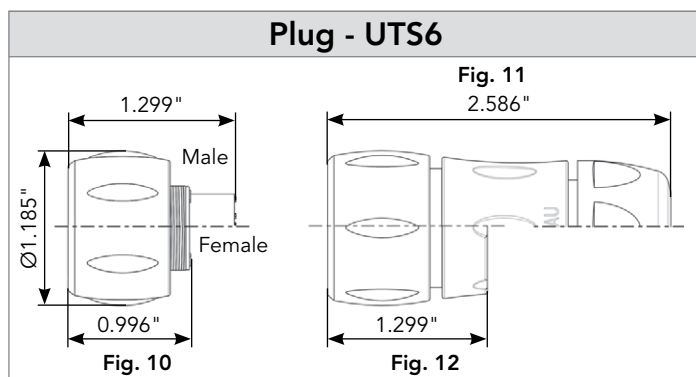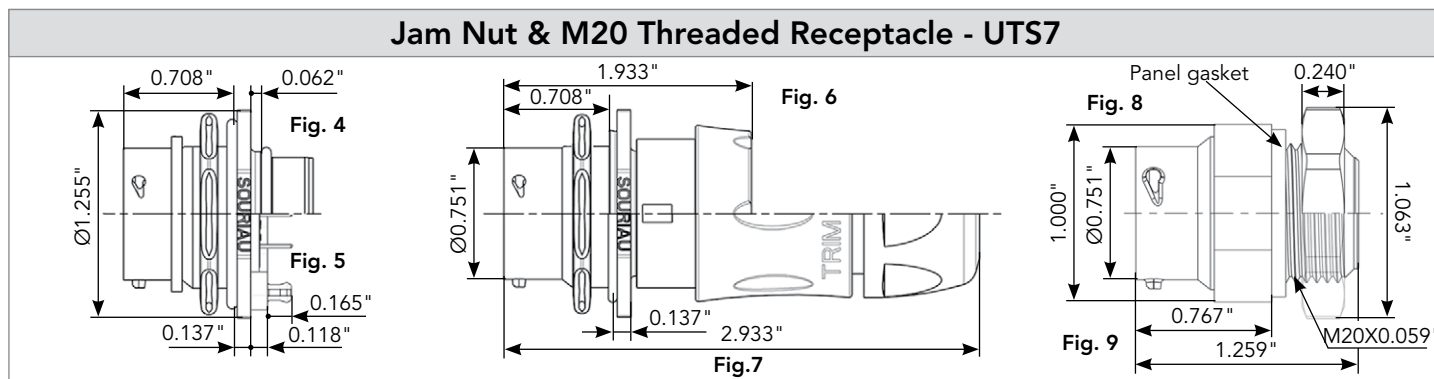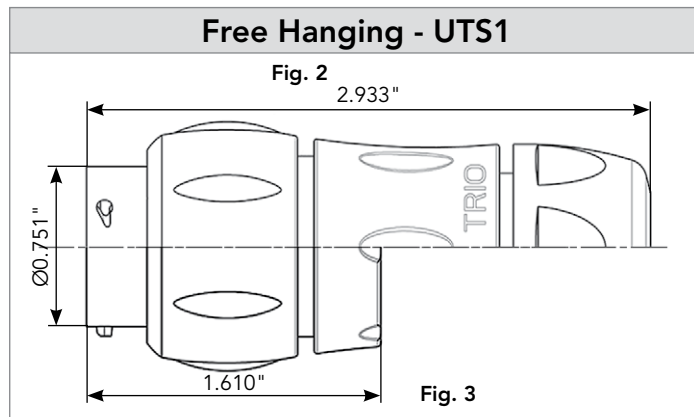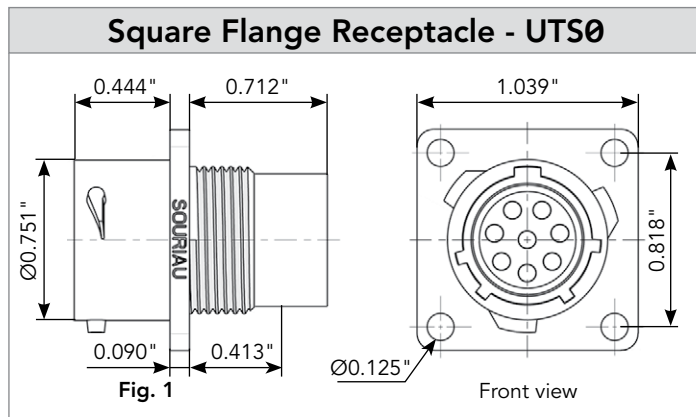

Note: Overmolded cable assembly dimensions available page 179.

Note: all dimensions are in inches

**128** (Shell size 12, 8x#16)

## Accessories and Tooling

### Jam Nut or M20 Threaded Receptacle Sealing Caps



IP68/69K

Part number  
UTS12DCG



IP68/69K

Metal terminal

Part number  
UTS12DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS612DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS12DCGE

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005587A      | 85005596 |

### Gasket



IP68/69K

Part numbers  
UTFD13B


### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + york090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |


(1): Example of plating, for other plating options see page 164  
\* Heads to be used with handle PN: SHANGLES

### Color Coding Rings



| Part numbers |            |
|--------------|------------|
| Receptacles  | Plugs      |
| UTS712CCRR   | UTS612CCRR |
| UTS712CCRY   | UTS612CCRY |
| UTS712CCRG   | UTS612CCRG |

Extraction tool #16 (RX2025GE1) see page 179. Dummy contact (SMSPKE0) see page 208.

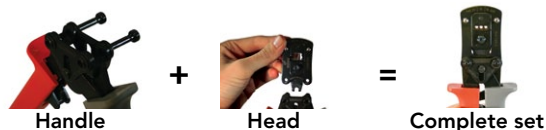

**128** (Shell size 12, 8x#16)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

(3): For dimensions see page 172

Note: all dimensions are in inches


### Electrical Characteristics

**UL**  
10A 500V UL94 V-0


**CSA**  
7A 500V UL94 V-0

**IEC**  
10A 80V 1.5kV 3

### UTS 128 Derating Curves

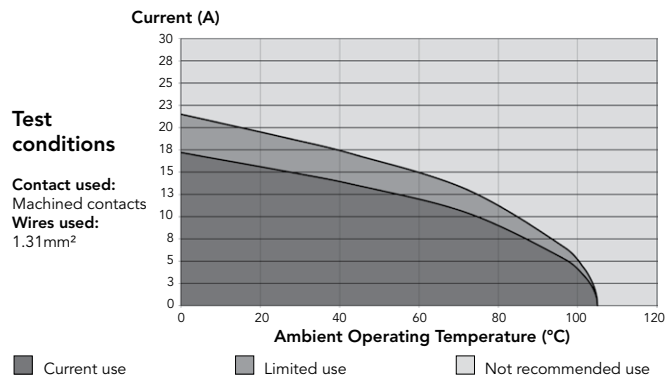

## 12E8/12D8 (Shell size 12, 8x#20)

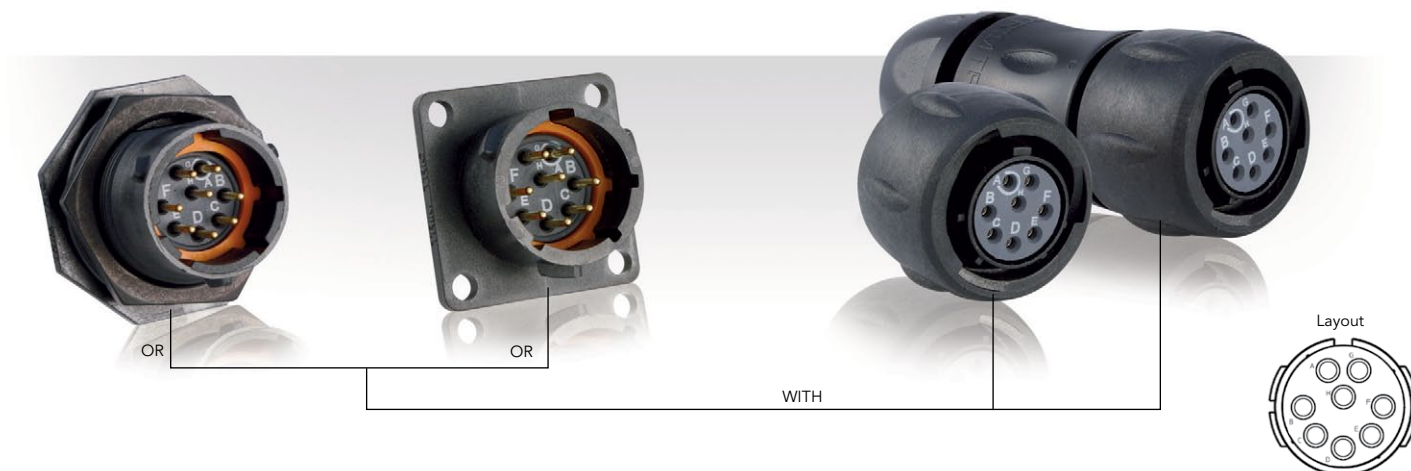

## Connector Part Numbers

| Contact type                                        | Connector type                                                | Backshell            | Part number        |                    |
|-----------------------------------------------------|---------------------------------------------------------------|----------------------|--------------------|--------------------|
|                                                     |                                                               |                      | Male insert        | Female insert      |
| Hand solder electrical contacts loaded see page 107 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS012E8P</b>   | <b>UTS012E8S</b>   |
|                                                     | Plug                                                          | Without (Fig. 1)     | <b>UTS612E8P</b>   | <b>UTS612E8S</b>   |
|                                                     |                                                               | Cable gland (Fig. 2) | <b>UTS6JC12E8P</b> | <b>UTS6JC12E8S</b> |
|                                                     | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS712E8P</b>   | <b>UTS712E8S</b>   |
| PCB contacts loaded see page 107                    | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS012D8P</b>   | <b>UTS012D8S</b>   |
|                                                     | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | <b>UTS712D8P32</b> | <b>UTS712D8S32</b> |
|                                                     | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS712D8P</b>   | <b>UTS712D8S</b>   |







Possibilities of discrimination/keying methods see page 208

Sealed unmated



# 12E8/12D8 (Shell size 12, 8x#20)

## Dimensions

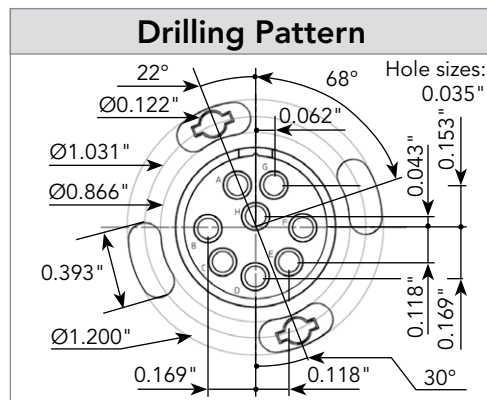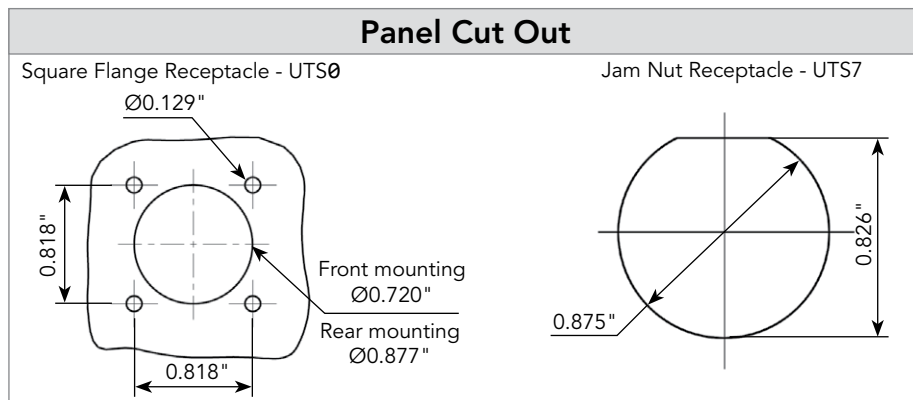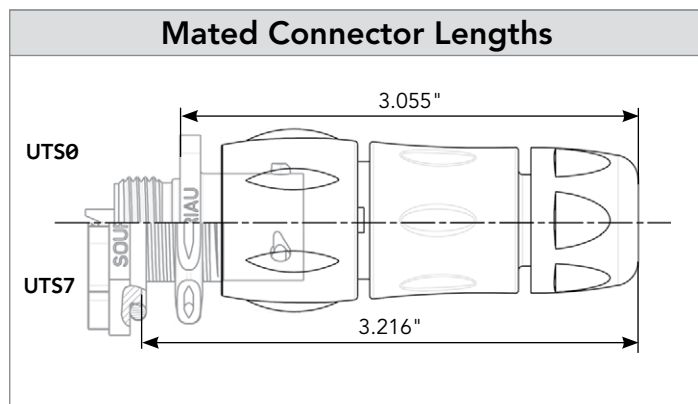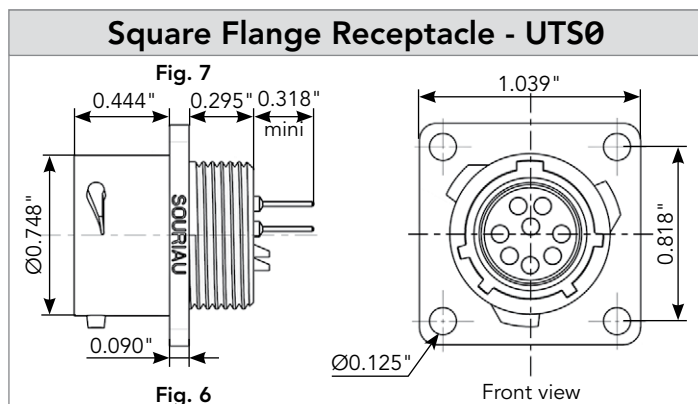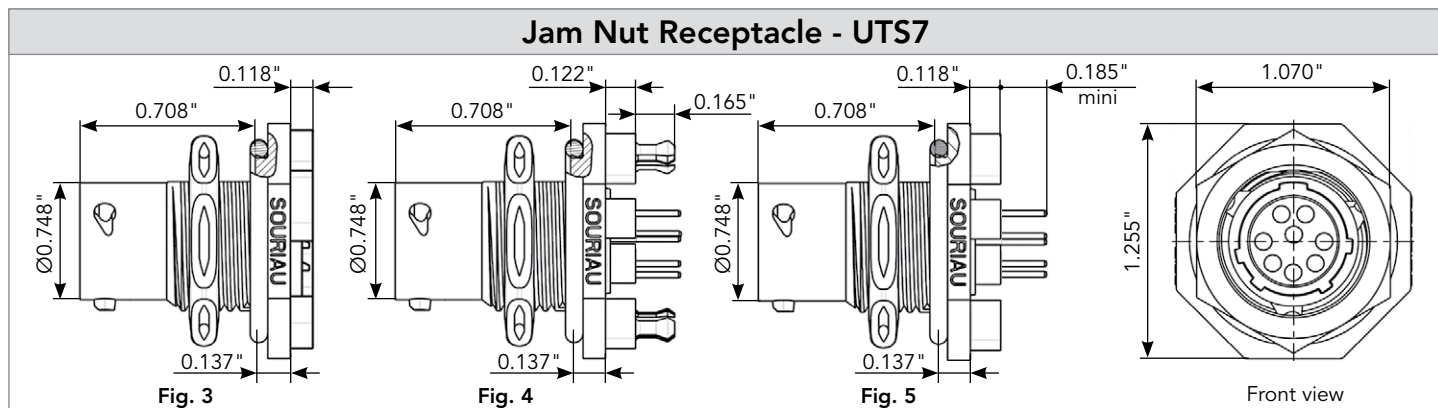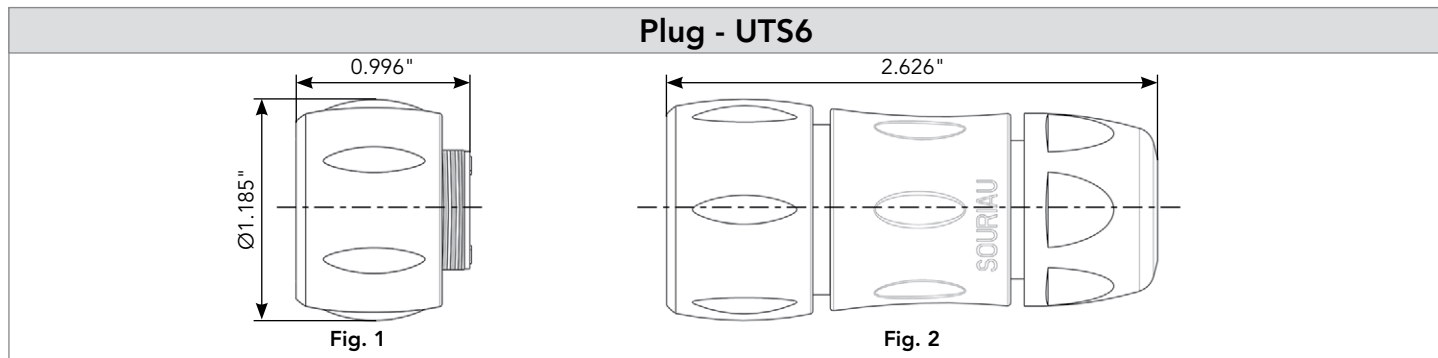



## 12E8/12D8 (Shell size 12, 8x#20)

### Accessories and Tooling

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS12DCG



IP68/69K

Metal terminal

Part number

UTS12DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS612DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS12DCGE

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005587A

Plug cap

85005596

#### Gasket



IP68/69K

Part numbers

UTFD13B

#### Color Coding Rings

G for Green



Y for Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS712CCRR

UTS612CCRR

UTS712CCRY

UTS612CCRY

UTS712CCRG

UTS612CCRG

## 12E8/12D8 (Shell size 12, 8x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
4.5A 250V UL94 HB

**CSA**  
4.5A 250V UL94 HB

**IEC**  
6A 32V 1.5kV 3

#### UTS 12E8/12D8 Derating Curves

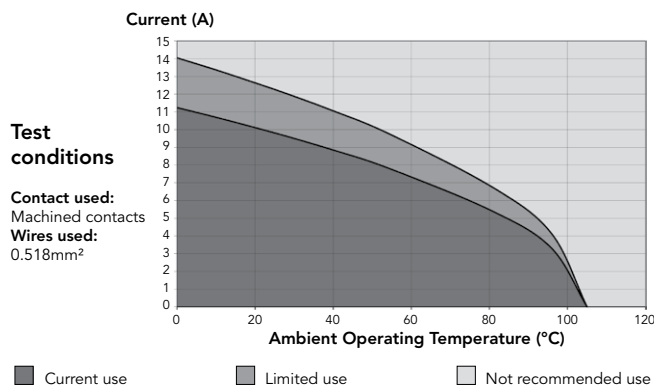

148 (Shell size 14, 4x#16, 4x#12)



Connector Part Numbers

| Contact type                                    | Connector type          | Backshell            | Part number |               |
|-------------------------------------------------|-------------------------|----------------------|-------------|---------------|
|                                                 |                         |                      | Male insert | Female insert |
| Crimp contacts supplied separately see page 111 | Free hanging receptacle | Cable gland (Fig. 1) | UTS1JC148P  | UTS1JC148S    |
|                                                 | Plug                    | Without (Fig. 2)     | UTS6148P    | UTS6148S      |
|                                                 | Plug                    | Cable gland (Fig. 3) | UTS6JC148P  | UTS6JC148S    |
|                                                 | Jam nut receptacle      | Without (Fig. 4)     | UTS7148P    | UTS7148S      |

**148** (Shell size 14, 4x#16, 4x#12)

## Dimensions

### Free Hanging - UTS1

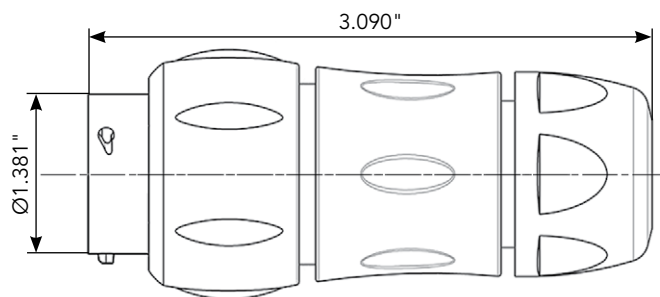


Fig. 1

### Plug - UTS6




Fig. 2 Male




Fig. 2 Female

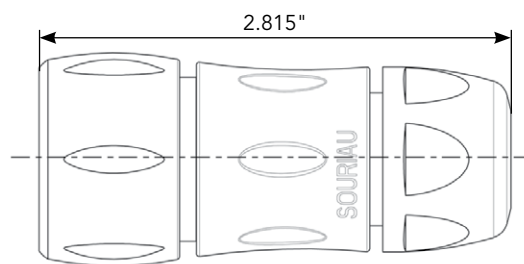


Fig. 3

### Jam Nut Receptacle - UTS7


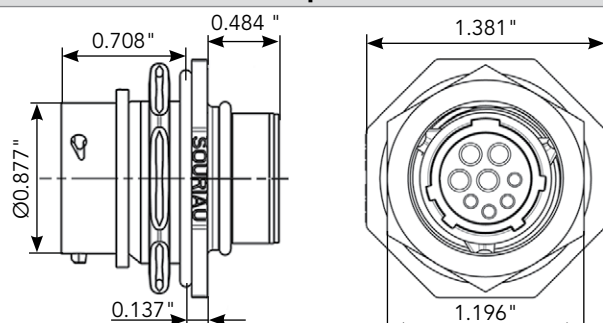



Fig. 4

### Mated Connector Length - UTS7

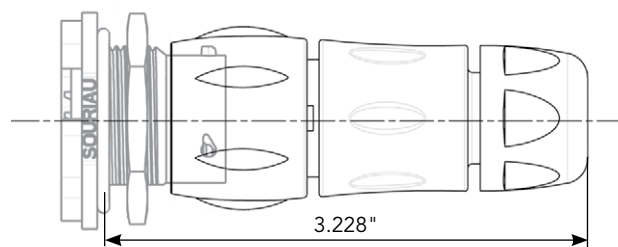


### Panel Cut Out

Jam Nut Receptacle - UTS7

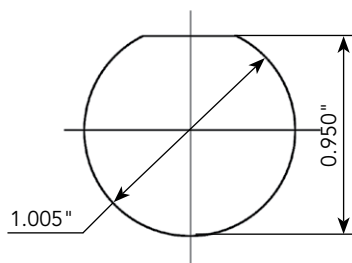

### Drilling Pattern



Note: all dimensions are in inches

148 (Shell size 14, 4x#16, 4x#12)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number

UTS14DCG



IP68/69K

Metal terminal

Part number

UTS14DCGR

### Plug Sealing Cap



IP68/69K

Part number

UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS14DCGE

### Plastic Protective Cap



Part numbers

Receptacle cap

Plug cap

85005588A

85005597

### Gasket



IP68/69K

Part numbers

UTFD14B

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG

### Extraction Tool



Part number  
Extraction tool #12

M317



Part number  
Extraction tool #16

RX2025GE1

### Crimp Tooling #16



Part number

SHANDLES (without Head)



Part number

TOOLKIT



HEAD (without Shandles)

| Contacts                       | Contact size                         | Part number of head |
|--------------------------------|--------------------------------------|---------------------|
| RM/RC 28M1K                    | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*           |
| RM/RC 24M9K                    |                                      | S16RCM20*           |
| RM/RC 20M13K                   |                                      | S16RCM20*           |
| RM/RC 20M12K                   |                                      | S16RCM20*           |
| RM/RC 16M23K                   |                                      | S16RCM16*           |
| RM/RC 14M30K                   |                                      | S16RCM14*           |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*           |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*           |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*           |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*           |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*          |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES

Coaxial contacts available see pages 167, 200 to 206



Handle

+



Head

=



Complete set

### Crimp Tooling #12



Part number hand tool

M317



Part number  
positioner + locator setting

VGE10078A

**148** (Shell size 14, 4x#16, 4x#12)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMP0F1000                    | RCPOF1000B                   | -          | -               |
| #12         |                                                                  |                           |           |                              |                              |            |                 |
| Crimp       | Machined                                                         | 22                        | 0.32      | 82911457NA <sup>(1)</sup>    | 82911456A <sup>(1)</sup>     | 0.034"     | 0.192"          |
|             |                                                                  | 20                        | 0.52      | 82911459NA <sup>(1)</sup>    | 82911458A <sup>(1)</sup>     | 0.044"     |                 |
|             |                                                                  | 18                        | 0.80      | 82911461NA <sup>(1)</sup>    | 82911460A <sup>(1)</sup>     | 0.055"     |                 |
|             |                                                                  | 16                        | 1.31      | 82911463NA <sup>(1)</sup>    | 82911462A <sup>(1)</sup>     | 0.067"     |                 |
|             |                                                                  | 14                        | 2.08      | 82911465NA <sup>(1)</sup>    | 82911464A <sup>(1)</sup>     | 0.087"     |                 |
|             |                                                                  | 12                        | 3.31      | 82911467NA <sup>(1)</sup>    | 82911466A <sup>(1)</sup>     | 0.111"     |                 |

(1): Example of plating, for other plating see page 168 (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

Note: all dimensions are in inches


### Electrical Characteristics

**UL**  
25A 250V UL94 V-0


**CSA**  
17A 230V UL94 V-0

**IEC**  
17A 230V 1.5kV 3

### UTS 148 Derating Curves

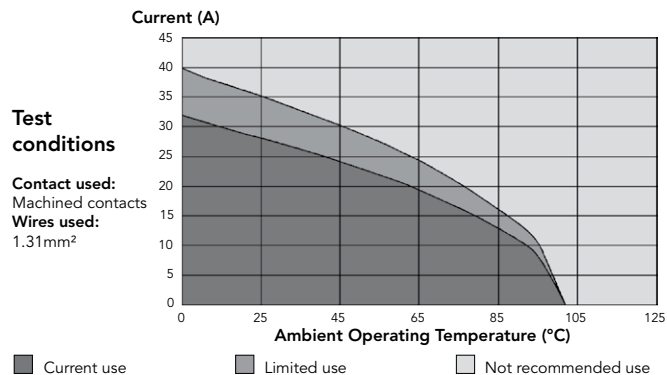

## 1210 - 12E10/12D10 (Shell size 12, 10x#20)

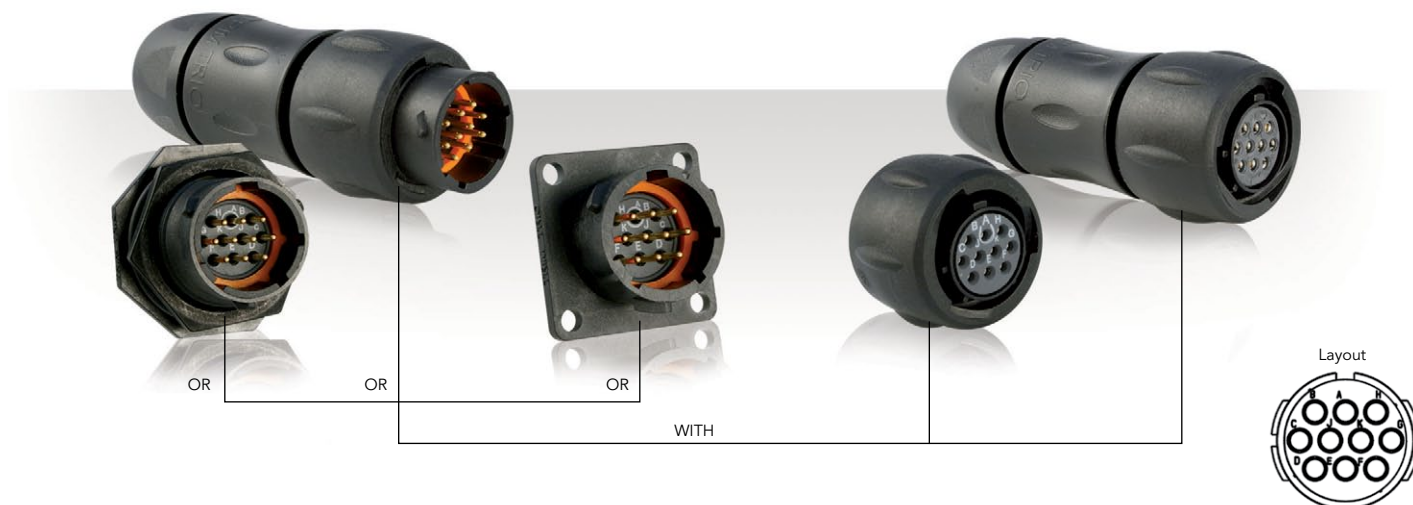

## Connector Part Numbers

| Contact type                                       | Connector type                                                | Backshell            | Part number         |                     |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                    |                                                               |                      | Male insert         | Female insert       |
| Crimp contacts supplied separately see page 115    | Free hanging receptacle                                       | Cable gland (Fig. 1) | <b>UTS1JC1210P</b>  | <b>UTS1JC1210S</b>  |
|                                                    | Plug                                                          | Without (Fig. 2)     | <b>UTS61210P</b>    | <b>UTS61210S</b>    |
|                                                    | Plug                                                          | Cable gland (Fig. 3) | <b>UTS6JC1210P</b>  | <b>UTS6JC1210S</b>  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS71210P</b>    | <b>UTS71210S</b>    |
| Handsolder electrical contacts loaded see page 115 | Square flange receptacle                                      | Without (Fig. 8)     | <b>UTS012E10P</b>   | <b>UTS012E10S</b>   |
|                                                    | Plug                                                          | Without (Fig. 2)     | <b>UTS612E10P</b>   | <b>UTS612E10S</b>   |
|                                                    |                                                               | Cable gland (Fig. 3) | <b>UTS6JC12E10P</b> | <b>UTS6JC12E10S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 5)     | <b>UTS712E10P</b>   | <b>UTS712E10S</b>   |
| PCB contacts loaded see page 115                   | Square flange receptacle                                      | Without (Fig. 8)     | <b>UTS012D10P</b>   | <b>UTS012D10S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS712D10P32</b> | <b>UTS712D10S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 7)     | <b>UTS712D10P</b>   | <b>UTS712D10S</b>   |








Possibilities of discrimination/keying methods see page 208

Sealed unmated



# 1210 - 12E10/12D10 (Shell size 12, 10x#20)

## Dimensions

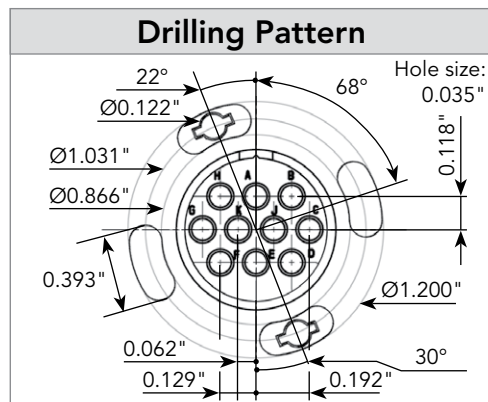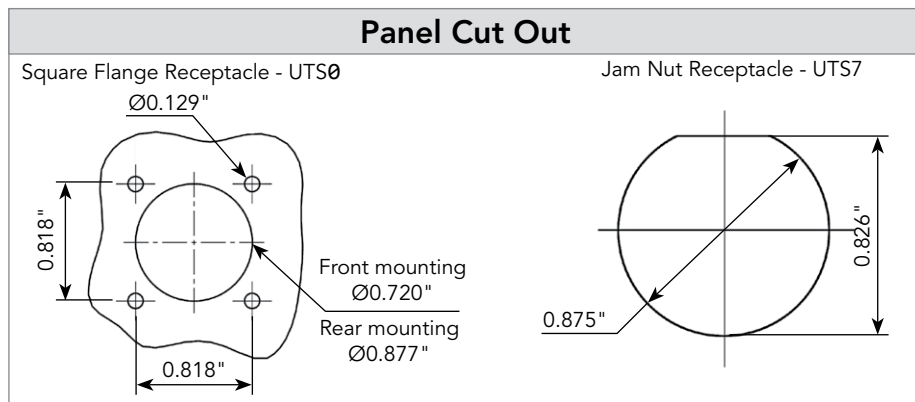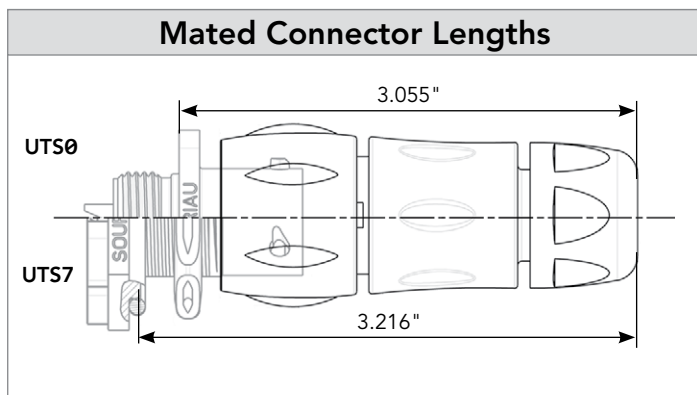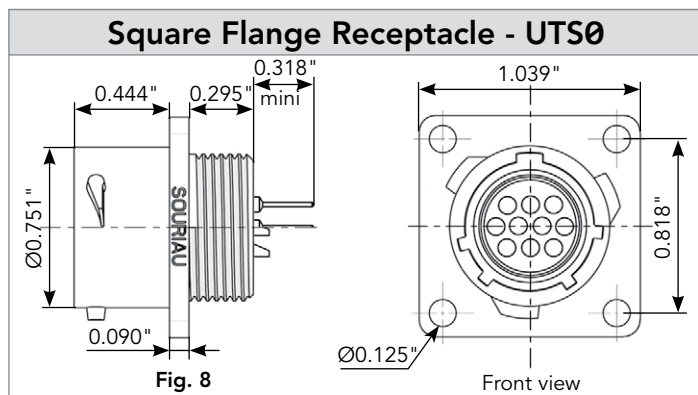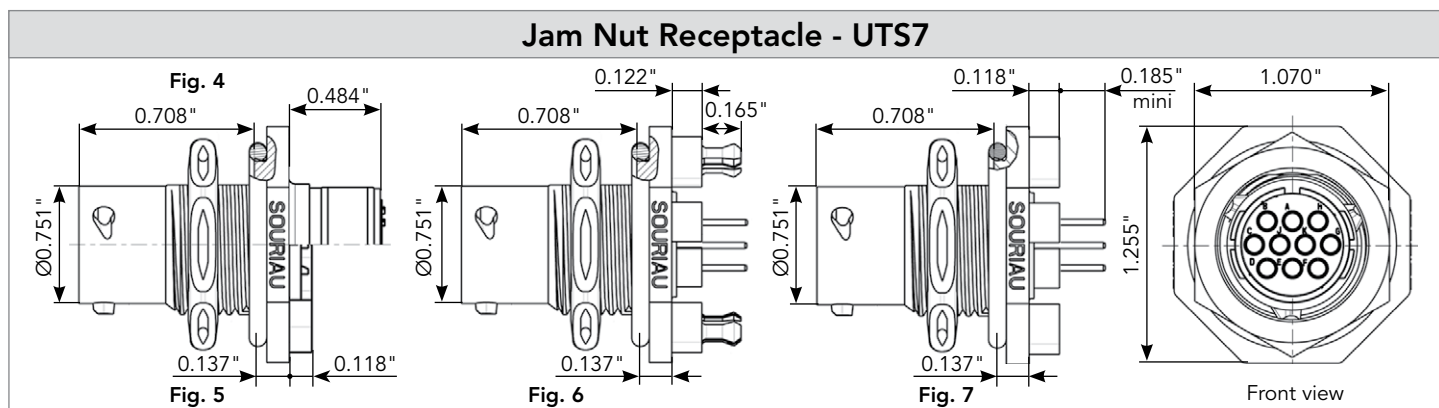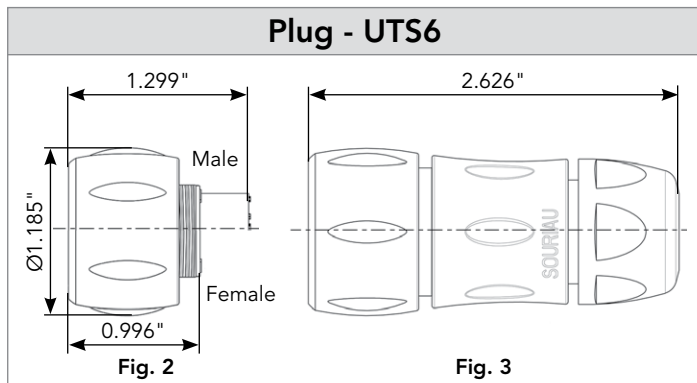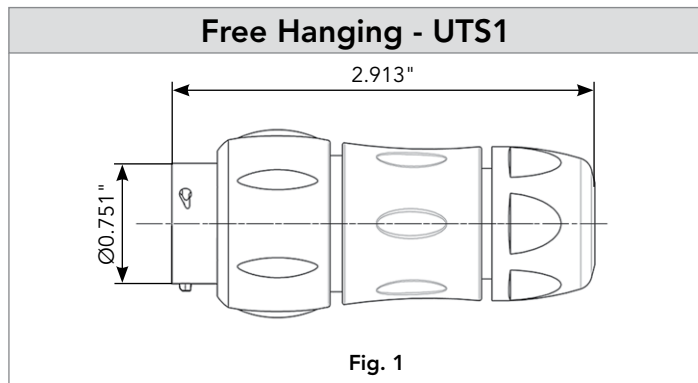

Note: all dimensions are in inches

# 1210 - 12E10/12D10 (Shell size 12, 10x#20)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS12DCG



IP68/69K

Metal terminal

Part number  
UTS12DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS612DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS12DCGE

### Crimp Tooling (without Shandles)



| Contacts                   | Contact size                         | Part number of head |
|----------------------------|--------------------------------------|---------------------|
| RM/RC 24W3K <sup>(1)</sup> | Standard contacts<br>#20<br>Ø 1.0 mm | S20RCM*             |
| RM/RC 20W3K <sup>(1)</sup> |                                      | S20RCM*             |
| RM/RC 18W3K <sup>(1)</sup> |                                      | S20RCM*             |
| SM/SC 24WL3S               |                                      | S20SCM20*           |
| SM/SC 20WL3S               |                                      | S20SCM20*           |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES

### Plastic Protective Cap



Part numbers

Receptacle cap  
85005587A

Plug cap  
85005596

### Gasket



IP68/69K

Part numbers  
UTFD13B

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles

Plugs

UTS712CCRR

UTS612CCRR

UTS712CCRY

UTS612CCRY

UTS712CCRG

UTS612CCRG



Handle



Head



Complete set

### Extraction Tool #20



Part number  
RX20D44

## 1210 - 12E10/12D10 (Shell size 12, 10x#20)

### Contacts for 1210

| #20   | Contact type                                                     | Wire size |                 | Part number              |                          | Max wire Ø | Max insulator Ø |
|-------|------------------------------------------------------------------|-----------|-----------------|--------------------------|--------------------------|------------|-----------------|
|       |                                                                  | AWG       | mm <sup>2</sup> | Male                     | Female                   |            |                 |
| Crimp | Machined                                                         | 26-24     | 0.13-0.20       | RM24W3K <sup>(1)</sup>   | RC24W3K <sup>(1)</sup>   | 0.031 "    | 0.062 "         |
|       |                                                                  | 22-20     | 0.32-0.52       | RM20W3K <sup>(1)</sup>   | RC20W3K <sup>(1)</sup>   | 0.045 "    | 0.062 "         |
|       |                                                                  | 20-18     | 0.50-0.80       | RM18W3K <sup>(1)</sup>   | RC18W3K <sup>(1)</sup>   | 0.051 "    | 0.082 "         |
|       | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24     | 0.13-0.20       | SM24W3TK6 <sup>(2)</sup> | SC24W3TK6 <sup>(2)</sup> | -          | 0.035"-0.062"   |
|       |                                                                  | 26-24     | 0.13-0.20       | SM24W3S26 <sup>(2)</sup> | SC24W3S25 <sup>(2)</sup> | -          | 0.035"-0.062"   |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3TK6 <sup>(2)</sup> | SC20W3TK6 <sup>(2)</sup> | -          | 0.047"-0.082"   |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3S26 <sup>(2)</sup> | SC20W3S25 <sup>(2)</sup> | -          | 0.047"-0.082"   |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

### Contacts for 12E10/12D10

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4µ gold over 0.8µ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4µ gold over 0.8µ Ni | -                      | -                     |

(1): For dimensions see page 169


Note: all dimensions are in inches

10

#### Electrical Characteristics

|                                                  |                                                          |
|--------------------------------------------------|----------------------------------------------------------|
| <b>UTS 1210</b><br><b>UL</b><br>5A 250V UL94 V-0 | <b>UTS 12E10/12D10</b><br><b>UL</b><br>4.5A 250V UL94 HB |
| <b>CSA</b><br>4A 250V UL94 V-0                   | <b>CSA</b><br>4.5A 250V UL94 HB                          |
| <b>IEC</b><br>6A 50V 1.5kV 3                     |                                                          |

#### UTS 1210 - 12E10/12D10 Derating Curves

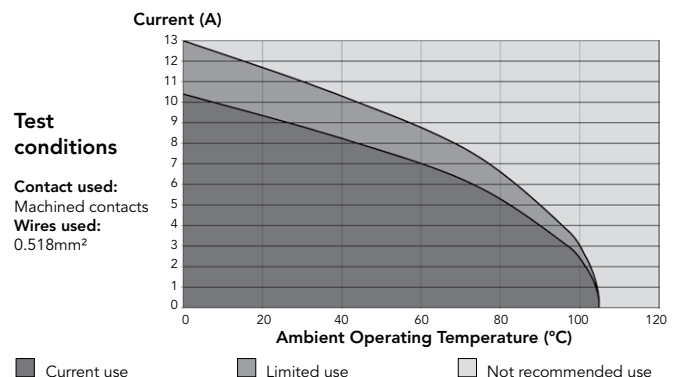

# 1412 (Shell size 14, 12x#16)



## Connector Part Numbers

| Contact type                                    | Connector type           | Backshell                         | Part number         |                     |
|-------------------------------------------------|--------------------------|-----------------------------------|---------------------|---------------------|
|                                                 |                          |                                   | Male insert         | Female insert       |
| Crimp contacts supplied separately see page 119 | Square flange receptacle | Without (Fig. 1)                  | <b>UTS01412P</b>    | <b>UTS01412S</b>    |
|                                                 | Free hanging receptacle  | Cable gland and grommet* (Fig. 2) | <b>UTS1GJC1412P</b> | -                   |
|                                                 | Free hanging receptacle  | Nut and grommet* (Fig. 3)         | <b>UTS1GN1412P</b>  | -                   |
|                                                 | Free hanging receptacle  | Cable gland (Fig. 2)              | <b>UTS1JC1412P</b>  | <b>UTS1JC1412S</b>  |
|                                                 | Plug                     | Without (Fig. 4)                  | <b>UTS61412P</b>    | <b>UTS61412S</b>    |
|                                                 | Plug                     | Cable gland and grommet* (Fig. 5) | -                   | <b>UTS6GJC1412S</b> |
|                                                 | Plug                     | Nut and grommet* (Fig. 6)         | -                   | <b>UTS6GN1412S</b>  |
|                                                 | Plug                     | Cable gland (Fig. 5)              | <b>UTS6JC1412P</b>  | <b>UTS6JC1412S</b>  |
|                                                 | Jam nut receptacle       | Without (Fig. 7)                  | <b>UTS71412P</b>    | <b>UTS71412S</b>    |
|                                                 | Jam nut receptacle       | Cable gland and grommet* (Fig. 9) | <b>UTS7GJC1412P</b> | -                   |
|                                                 | Jam nut receptacle       | Nut and grommet* (Fig. 8)         | <b>UTS7GN1412P</b>  | -                   |
| PCB contacts supplied separately see page 119   | Square flange receptacle | Without (Fig. 1)                  | <b>UTS01412P</b>    | <b>UTS01412S</b>    |
|                                                 | Jam nut receptacle       | Without (Fig. 7)                  | <b>UTS71412P</b>    | <b>UTS71412S</b>    |

Possibilities of discrimination/keying methods see page 208

\* Grommet for discrete wire sealing








## Overmolded Cable Assembly Part Numbers

| Overmolding type                      | Description                              | Wire size | Part number (length: 3 ft)* |
|---------------------------------------|------------------------------------------|-----------|-----------------------------|
| Overmolded harnesses, straight ending | D/E assembly 1 male plug & 1 female plug | 16 AWG    | <b>UTS6V1412PS03FT00</b>    |
|                                       | S/E assembly 1 female plug               | 16 AWG    | <b>UTS6V1412S03FT00</b>     |
|                                       | S/E assembly 1 male plug                 | 16 AWG    | <b>UTS6V1412P03FT00</b>     |

\* Other lengths available: 3, 6, 12 feet only: e.g. UTS6V1412PS06FT00 for a 6 feet version

# 1412 (Shell size 14, 12x#16)

## Dimensions

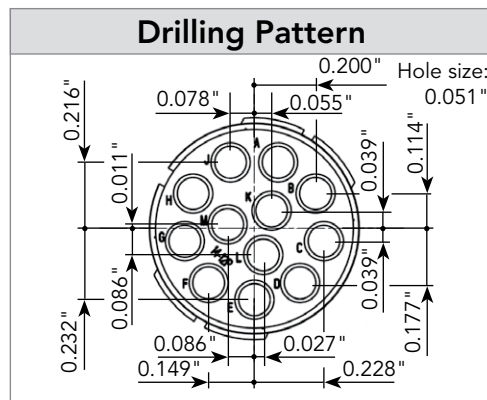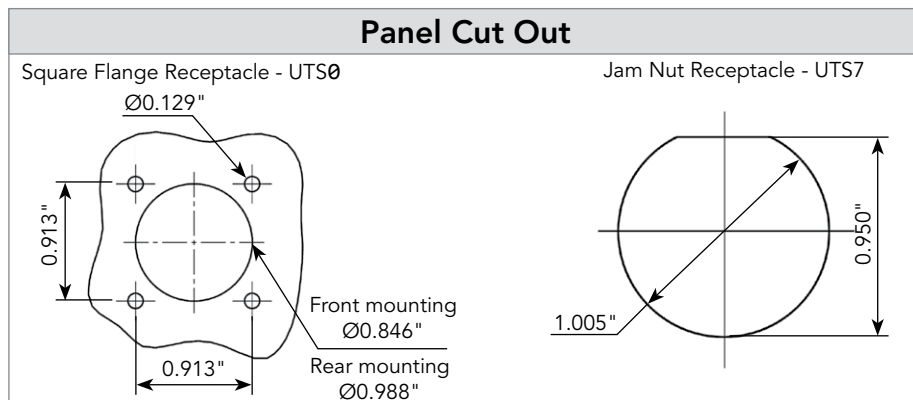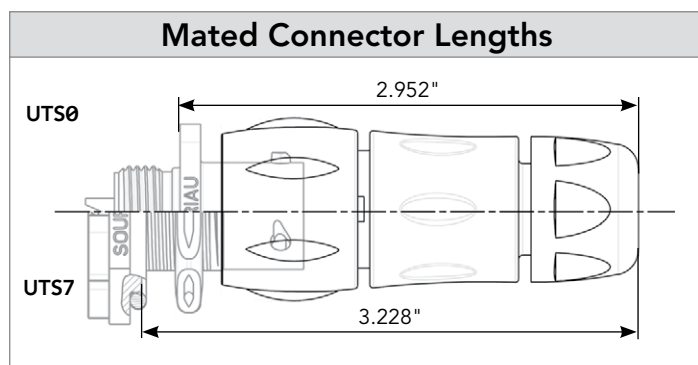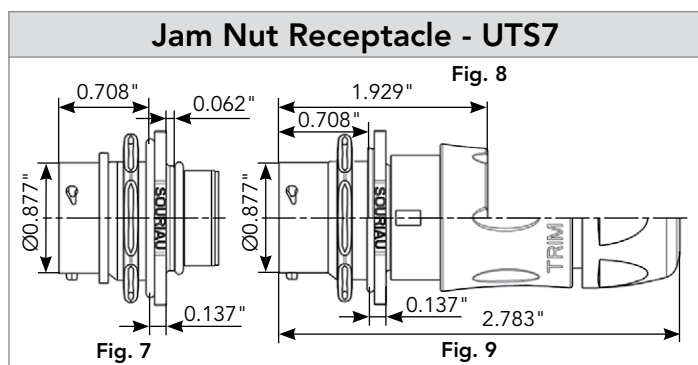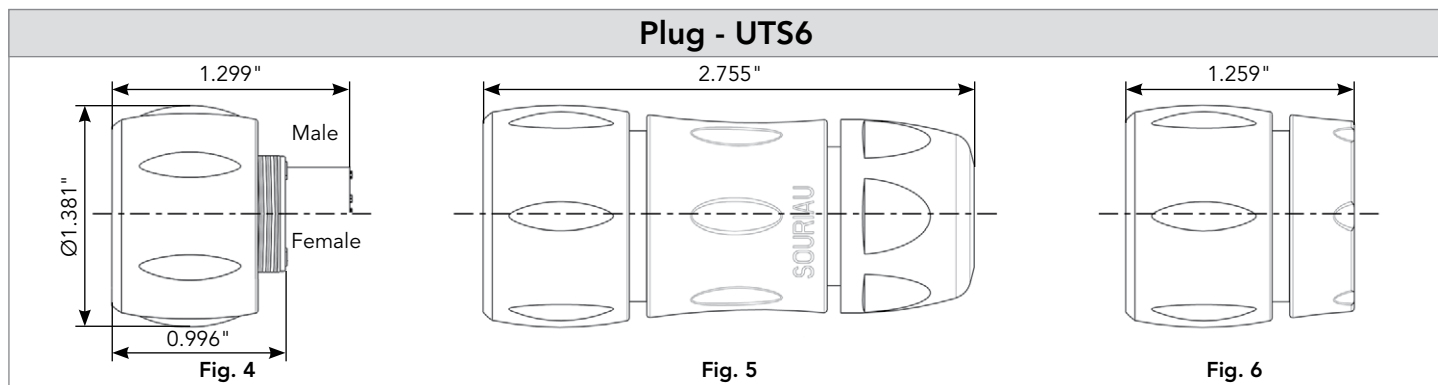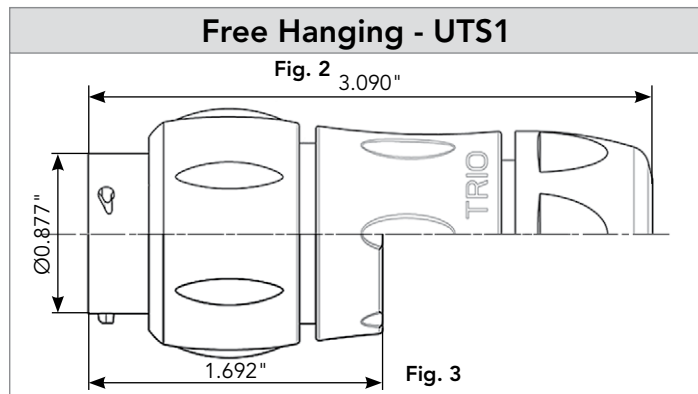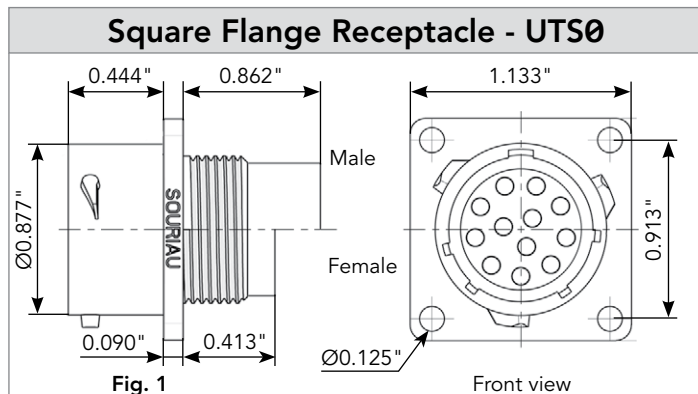

Note: Overmolded cable assembly dimensions available page 179.

Note: all dimensions are in inches



**1412** (Shell size 14, 12x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS14DCG



IP68/69K

Metal terminal

Part number  
UTS14DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS14DCGE

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005588A      | 85005597 |


### Gasket



IP68/69K

Part numbers  
UTFD14B

### Color Coding Rings



Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS714CCRR  | UTS614CCRR |
| UTS714CCRY  | UTS614CCRY |
| UTS714CCRG  | UTS614CCRG |

### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + yolk090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see page 164

\* Heads to be used with handle PN: SHANGLES



Handle



Head



Complete set

# 1412 (Shell size 14, 12x#16)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 172

Note: all dimensions are in inches

12


### Electrical Characteristics

**UL**  
10A 500V UL94 V-0

**CSA**  
7A 500V UL94 V-0

**IEC**  
10A 63V 1.5kV 3

### UTS 1412 Derating Curves

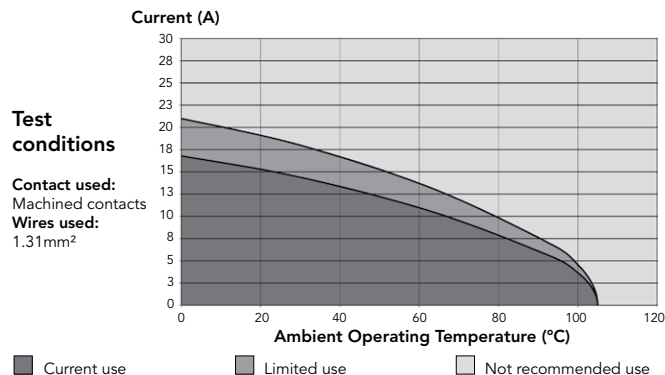



14E12/14D12 (Shell size 14, 8x#20, 4x#16)



Connector Part Numbers

| Contact type                                       | Connector type                                                | Backshell            | Part number  |               |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|--------------|---------------|
|                                                    |                                                               |                      | Male insert  | Female insert |
| Handsolder electrical contacts loaded see page 123 | Square flange receptacle                                      | Without (Fig. 6)     | UTS014E12P   | UTS014E12S    |
|                                                    | Plug                                                          | Without (Fig. 1)     | UTS614E12P   | UTS614E12S    |
|                                                    |                                                               | Cable gland (Fig. 2) | UTS6JC14E12P | UTS6JC14E12S  |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | UTS714E12P   | UTS714E12S    |
| PCB contacts loaded see page 123                   | Square flange receptacle                                      | Without (Fig. 6)     | UTS014D12P   | UTS014D12S    |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | UTS714D12P32 | UTS714D12S32  |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | UTS714D12P   | UTS714D12S    |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

# 14E12/14D12 (Shell size 14, 8x#20, 4x#16)

## Dimensions

### Plug - UTS6




Fig. 1

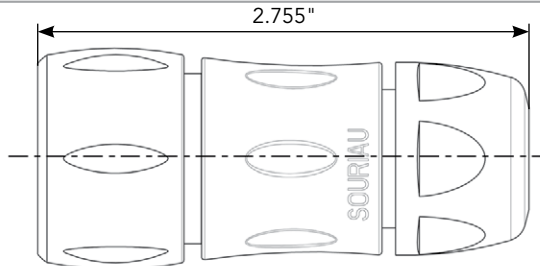


Fig. 2

### Jam Nut Receptacle - UTS7




Fig. 3




Fig. 4





Fig. 5

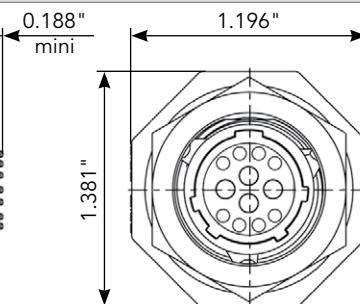

Front view

### Square Flange Receptacle - UTS0






Fig. 6

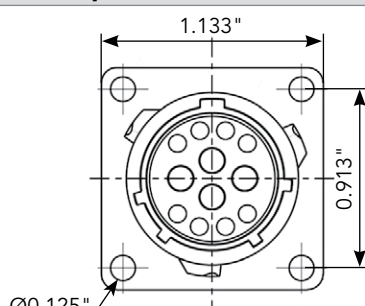


Front view

### Mated Connector Lengths

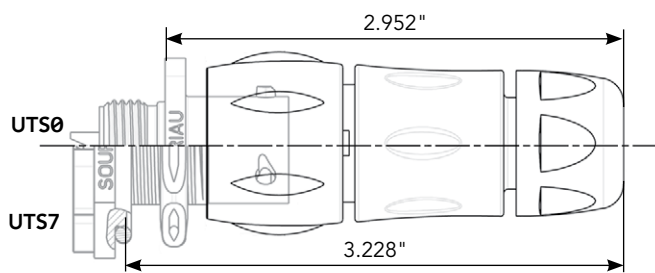


### Panel Cut Out


Square Flange Receptacle - UTS0

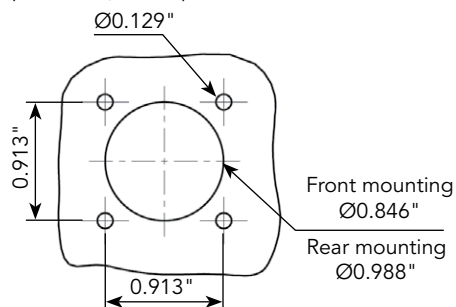

Jam Nut Receptacle - UTS7



### Drilling Pattern

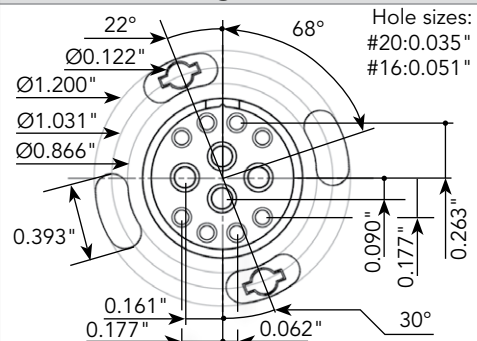

Note: all dimensions are in inches

## 14E12/14D12 (Shell size 14, 8x#20, 4x#16)

### Accessories and Tooling

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS14DCG



IP68/69K

Metal terminal

Part number

UTS14DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS614DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS14DCGE

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005588A

Plug cap

85005597

#### Gasket



IP68/69K

Part numbers

UTFD14B

#### Color Coding Rings

G for Green



Y for Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG

## 14E12/14D12 (Shell size 14, 8x#20, 4x#16)

### Contacts

| #16        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 18 to 14               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |
| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.149"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
4.5A 250V UL94 HB


**CSA**  
4.5A 250V UL94 HB

**IEC**  
4A 50V 1.5kV 3

#### UTS 14E12/14D12 Derating Curves

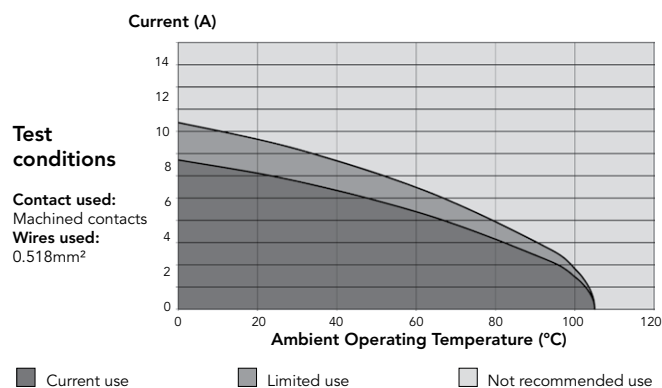

1492 (Shell size 14, 12x#16)

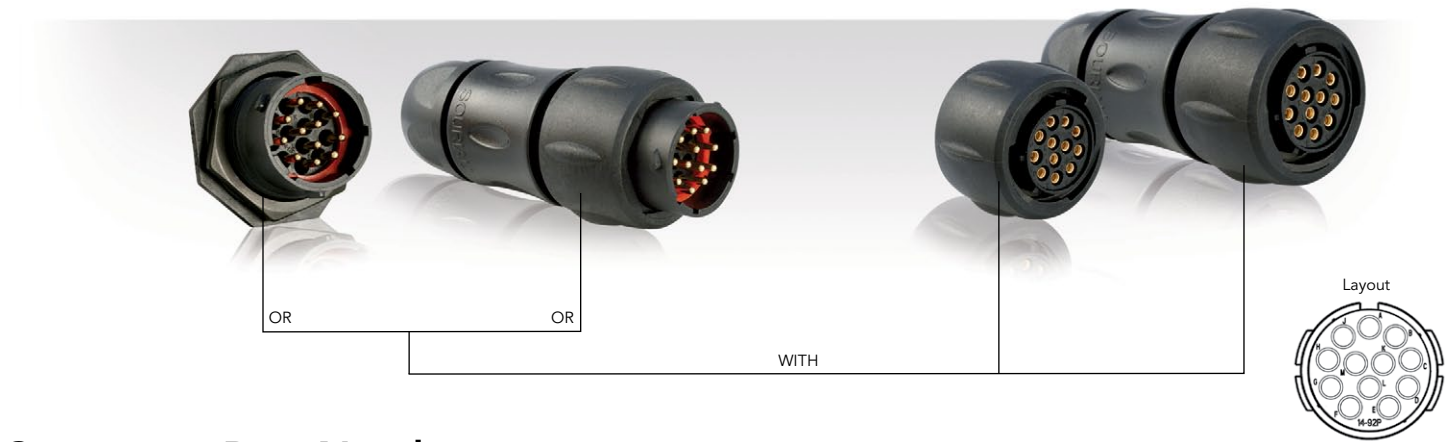

Connector Part Numbers

| Contact type                                    | Connector type          | Backshell            | Part number |               |
|-------------------------------------------------|-------------------------|----------------------|-------------|---------------|
|                                                 |                         |                      | Male insert | Female insert |
| Crimp contacts supplied separately see page 127 | Free hanging receptacle | Cable gland (Fig. 1) | UTS1JC1492P | UTS1JC1492S   |
|                                                 | Plug                    | Without (Fig. 2)     | UTS61492P   | UTS61492S     |
|                                                 | Plug                    | Cable gland (Fig. 3) | UTS6JC1492P | UTS6JC1492S   |
|                                                 | Jam nut receptacle      | Without (Fig. 4)     | UTS71492P   | UTS71492S     |
| PCB contacts supplied separately see page 127   | Jam nut receptacle      | Without (Fig. 4)     | UTS71492P   | UTS71492S     |


Possibilities of discrimination/keying methods see page 208

**1492** (Shell size 14, 12x#16)

## Dimensions

### Free Hanging - UTS1

Fig. 1  
3.090"

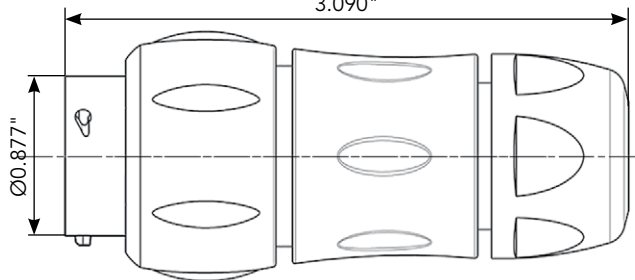

### Plug - UTS6




Fig. 2

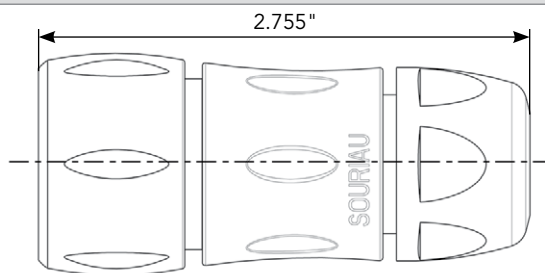


Fig. 3

### Jam Nut Receptacle - UTS7





Fig. 4


### Mated Connector Lengths

UTS7

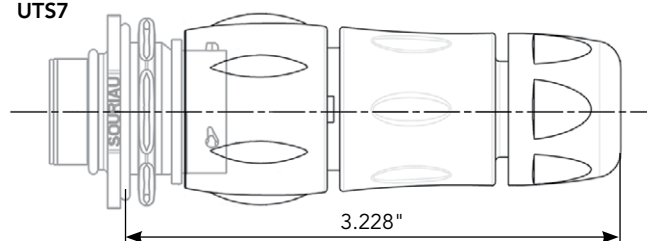


### Panel Cut Out

Jam Nut Receptacle - UTS7



### Drilling Pattern

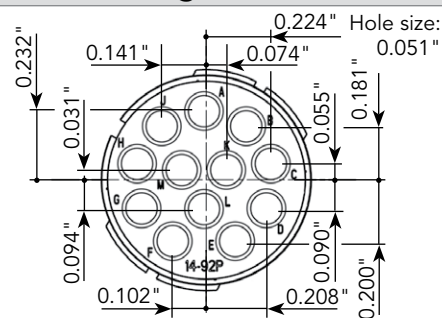

Note: all dimensions are in inches

**1492** (Shell size 14, 12x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS14DCG



IP68/69K

Metal terminal

Part number  
UTS14DCGR

### Handle (without Head)



Part number  
SHANGLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS14DCGE

### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK10D28K                    |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 + yolk090       |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see page 164

\* Heads to be used with handle PN: SHANGLES

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005588A      | 85005597 |

### Gasket



IP68/69K

Part numbers  
UTFD14B

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS714CCRR  | UTS614CCRR |
| UTS714CCRY  | UTS614CCRY |
| UTS714CCRG  | UTS614CCRG |

Extraction tool #16 (RX2025GE1) see page 179. Dummy contact (SMSPKE0) see page 208.



Handle



Head



Complete set



**1492** (Shell size 14, 12x#16)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021"     | 0.039"          |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031"     | 0.062"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045"     | 0.070"          |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045"     | 0.086"          |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070"     | 0.125"          |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090"     | 0.125"          |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035"-0.062"   |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047"-0.082"   |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118"          |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125"          |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 172

Note: all dimensions are in inches

12


### Electrical Characteristics

**UL**  
10A 600V UL94 V-0


**CSA**  
7A 500V UL94 V-0

**IEC**  
10A 63V 1.5kV 3

### UTS 1492 Derating Curves

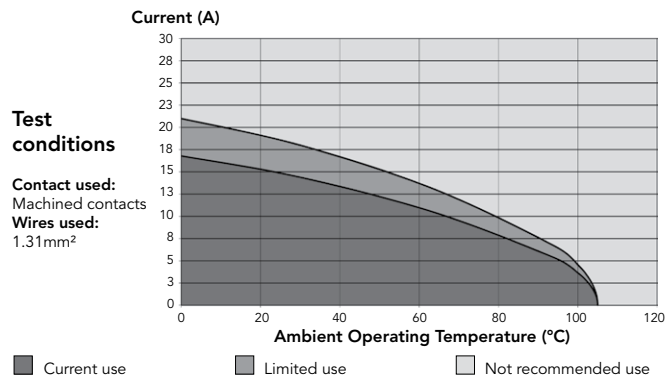

## 12E14/12D14 (Shell size 12, 14x#20)

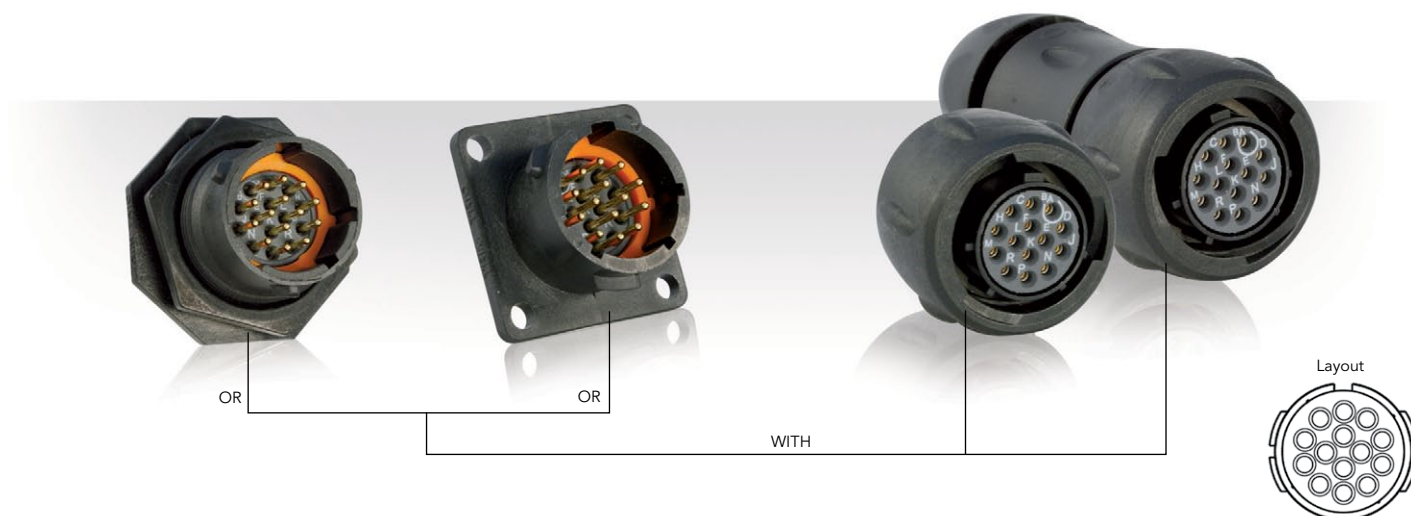

## Connector Part Numbers







| Contact type                                       | Connector type                                                | Backshell            | Part number         |                     |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                    |                                                               |                      | Male insert         | Female insert       |
| Handsolder electrical contacts loaded see page 131 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS012E14P</b>   | <b>UTS012E14S</b>   |
|                                                    | Plug                                                          | Without (Fig. 1)     | <b>UTS612E14P</b>   | <b>UTS612E14S</b>   |
|                                                    |                                                               | Cable gland (Fig. 2) | <b>UTS6JC12E14P</b> | <b>UTS6JC12E14S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS712E14P</b>   | <b>UTS712E14S</b>   |
| PCB contacts loaded see page 131                   | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS012D14P</b>   | <b>UTS012D14S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | <b>UTS712D14P32</b> | <b>UTS712D14S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS712D14P</b>   | <b>UTS712D14S</b>   |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

## 12E14/12D14 (Shell size 12, 14x#20)

### Dimensions

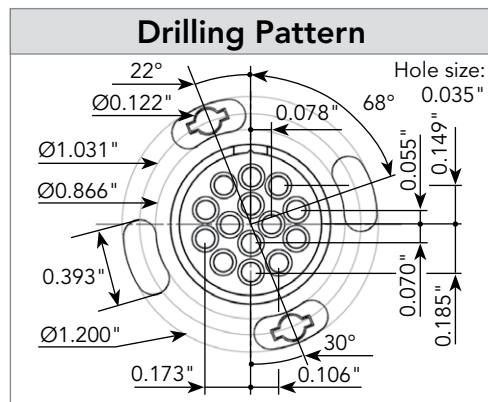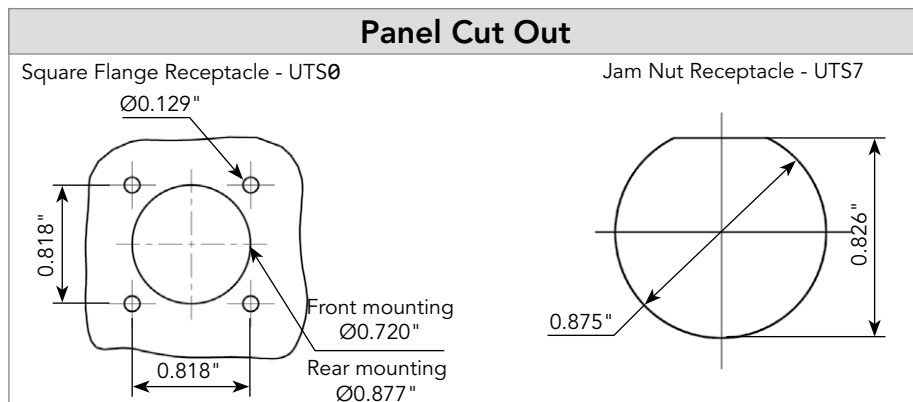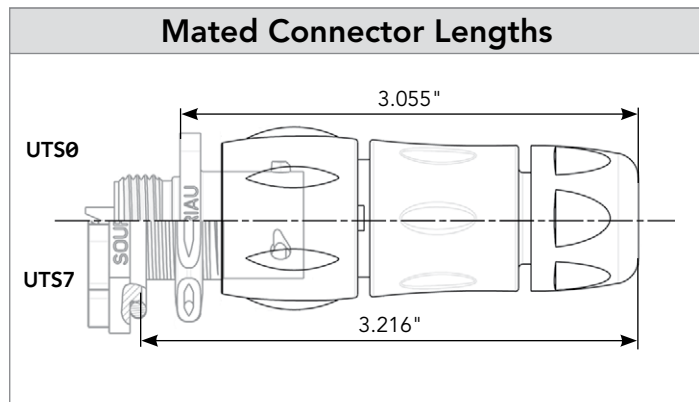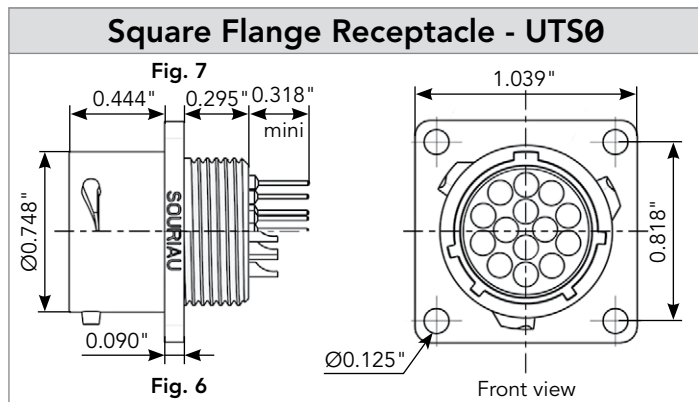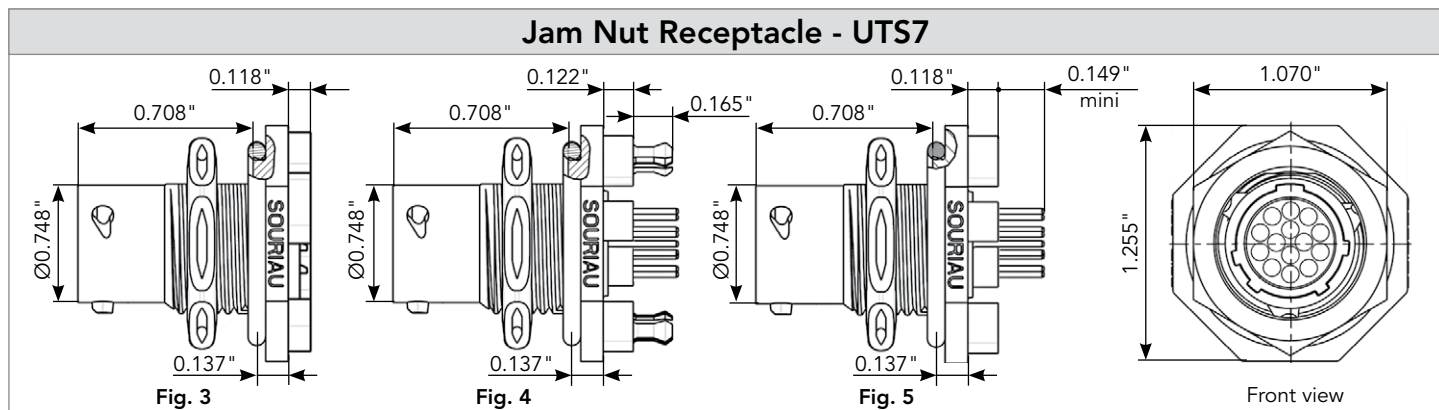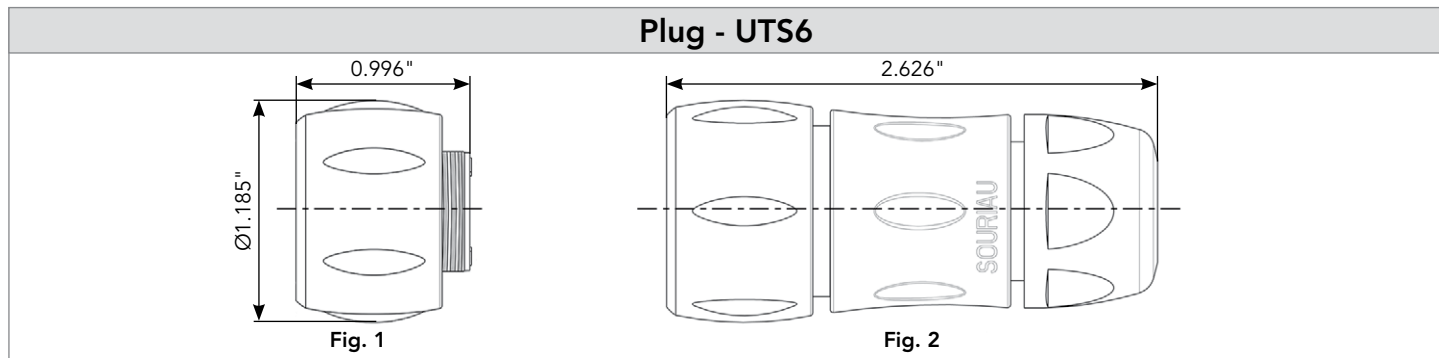

Note: all dimensions are in inches

## 12E14/12D14 (Shell size 12, 14x#20)

### Accessories and Tooling

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS12DCG



IP68/69K

Metal terminal

Part number

UTS12DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS612DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS12DCGE

#### Plastic Protective Cap



Part numbers

Receptacle cap

85005587A

Plug cap

85005596

#### Gasket



IP68/69K

Part numbers

UTFD13B

#### Color Coding Rings

G for Green



Y for Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS712CCRR

UTS612CCRR

UTS712CCRY

UTS612CCRY

UTS712CCRG

UTS612CCRG

## 12E14/12D14 (Shell size 12, 14x#20)

### Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
4.5A 250V UL94 HB


**CSA**  
4.5A 250V UL94 HB

**IEC**  
5A 32V 1.5kV 3

#### UTS 12E14/12D14 Derating Curves

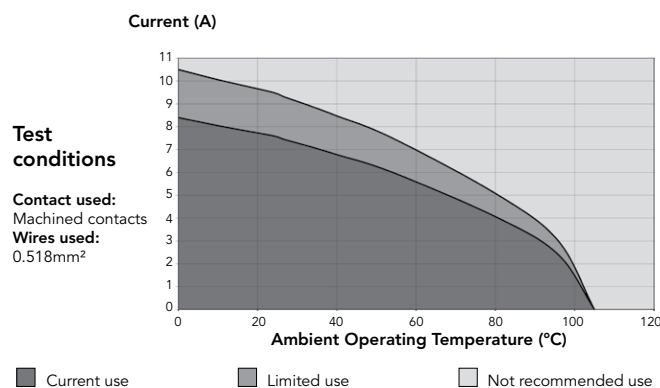

## 14E15/14D15 (Shell size 14, 14x#20, 1x#16)

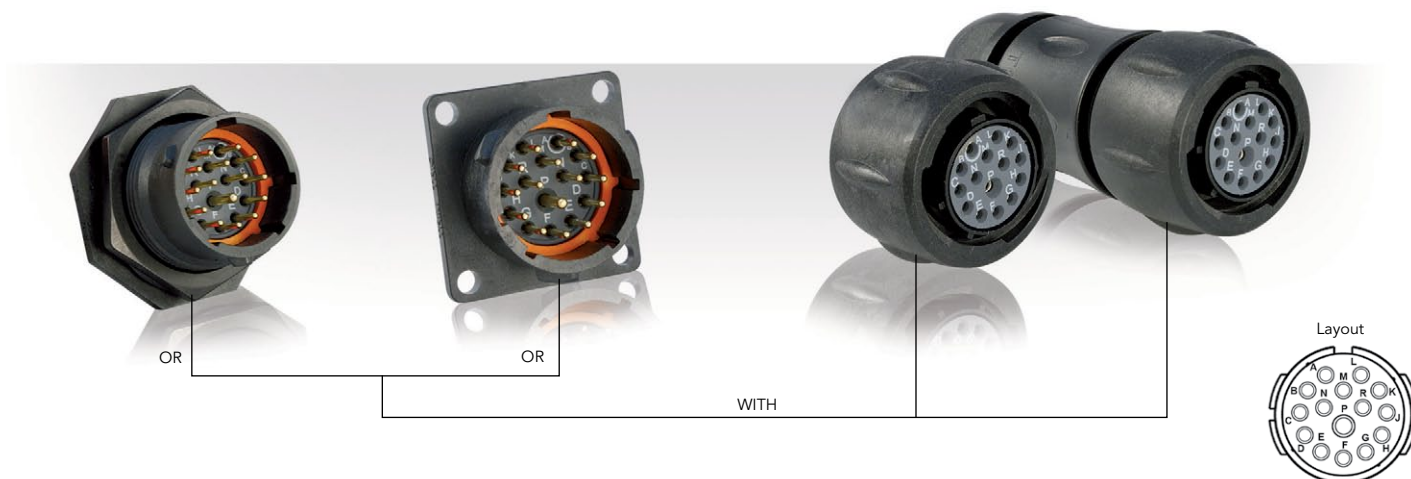

## Connector Part Numbers

| Contact type                                       | Connector type                                                | Backshell            | Part number         |                     |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                    |                                                               |                      | Male insert         | Female insert       |
| Handsolder electrical contacts loaded see page 135 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS014E15P</b>   | <b>UTS014E15S</b>   |
|                                                    | Plug                                                          | Without (Fig. 1)     | <b>UTS614E15P</b>   | <b>UTS614E15S</b>   |
|                                                    |                                                               | Cable gland (Fig. 2) | <b>UTS6JC14E15P</b> | <b>UTS6JC14E15S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS714E15P</b>   | <b>UTS714E15S</b>   |
| PCB contacts loaded see page 135                   | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS014D15P</b>   | <b>UTS014D15S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | <b>UTS714D15P32</b> | <b>UTS714D15S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS714D15P</b>   | <b>UTS714D15S</b>   |

Possibilities of discrimination/keying methods see page 208


Sealed unmated

## Dimensions


**Fig. 1**



**Fig. 3**



**Fig. 6**



## UTS0

UTS7

Technical drawing of the top view of a circular plate. The drawing includes the following dimensions and specifications:

- Overall Diameter:** 0.240"
- Inner Circle Diameter:** 0.098"
- Radial Dimensions (from center to outer edge):** 0.137", 0.039", 0.011", 0.074", 0.110", 0.208", 0.244"
- Angular Dimensions:** 22°, 68°, 30°
- Hole Sizes:**
  - #20: 0.035"
  - #16: 0.051"
- Other Dimensions:** 0.106", 0.125", 0.216", 0.200"

Note: all dimensions are in inches



## 14E15/14D15 (Shell size 14, 14x#20, 1x#16)

### Accessories and Tooling

#### Jam Nut Sealing Caps



IP68/69K

Part number

UTS14DCG



IP68/69K

Metal terminal

Part number

UTS14DCGR

#### Plug Sealing Cap



IP68/69K

Part number

UTS614DCG

#### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS14DCGE

#### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005588A

Plug cap

85005597

#### Gasket



IP68/69K

Part numbers

UTFD14B

#### Color Coding Rings

G for Green



Y for  
Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG

## 14E15/14D15 (Shell size 14, 14x#20, 1x#16)

### Contacts

| #16        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 18 to 14               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |
| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.149"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


#### Electrical Characteristics

**UL**  
12A 600V UL94 HB


**CSA**  
12A 600V UL94 HB

**IEC**  
4A 50V 1.5kV 3

#### UTS 14E15/14D15 Derating Curves

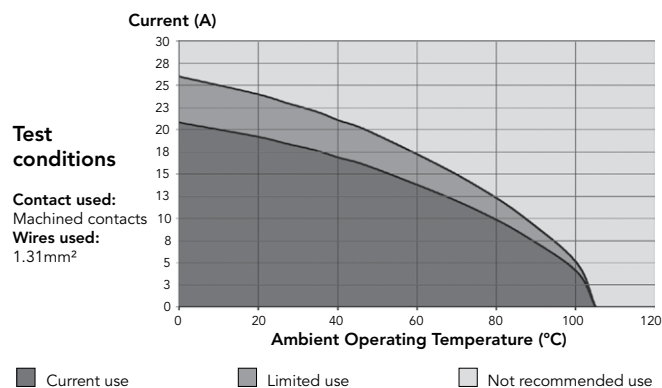

## 14E18/14D18 (Shell size 14, 18x#20)

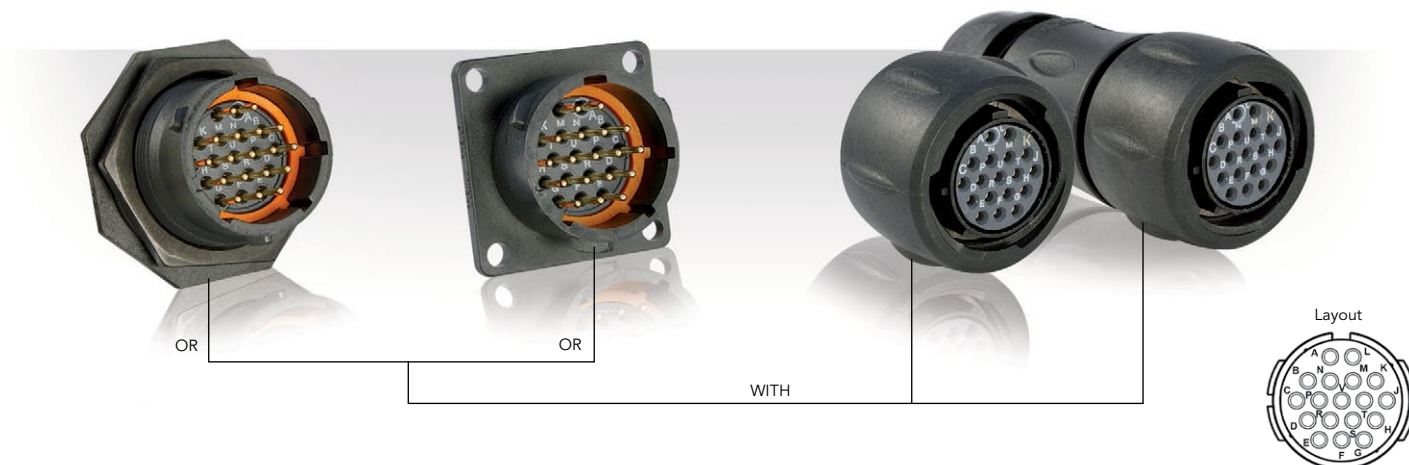

## Connector Part Numbers







| Contact type                                       | Connector type                                                | Backshell            | Part number         |                     |
|----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                    |                                                               |                      | Male insert         | Female insert       |
| Handsolder electrical contacts loaded see page 139 | Square flange receptacle                                      | Without (Fig. 6)     | <b>UTS014E18P</b>   | <b>UTS014E18S</b>   |
|                                                    | Plug                                                          | Without (Fig. 1)     | <b>UTS614E18P</b>   | <b>UTS614E18S</b>   |
|                                                    |                                                               | Cable gland (Fig. 2) | <b>UTS6JC14E18P</b> | <b>UTS6JC14E18S</b> |
|                                                    | Jam nut receptacle                                            | Without (Fig. 3)     | <b>UTS714E18P</b>   | <b>UTS714E18S</b>   |
| PCB contacts loaded see page 139                   | Square flange receptacle                                      | Without (Fig. 7)     | <b>UTS014D18P</b>   | <b>UTS014D18S</b>   |
|                                                    | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 4)     | <b>UTS714D18P32</b> | <b>UTS714D18S32</b> |
|                                                    | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 5)     | <b>UTS714D18P</b>   | <b>UTS714D18S</b>   |

Possibilities of discrimination/keying methods see page 208

Sealed unmated

# 14E18/14D18 (Shell size 14, 18x#20)

## Dimensions

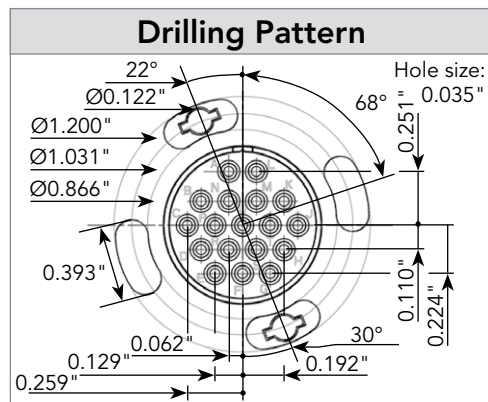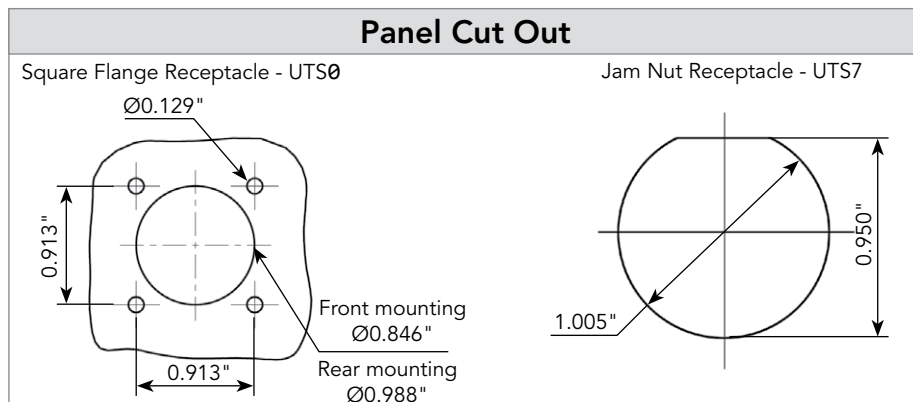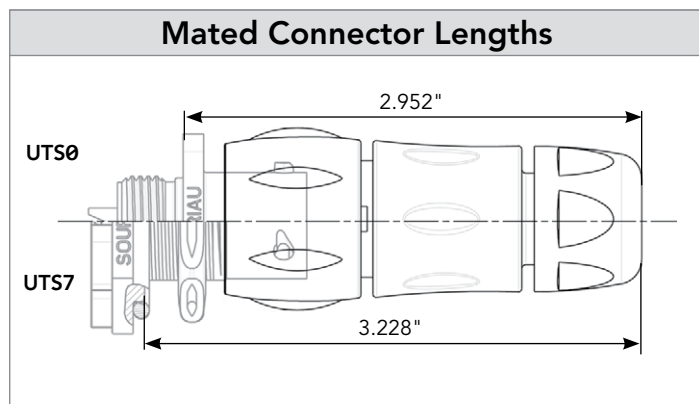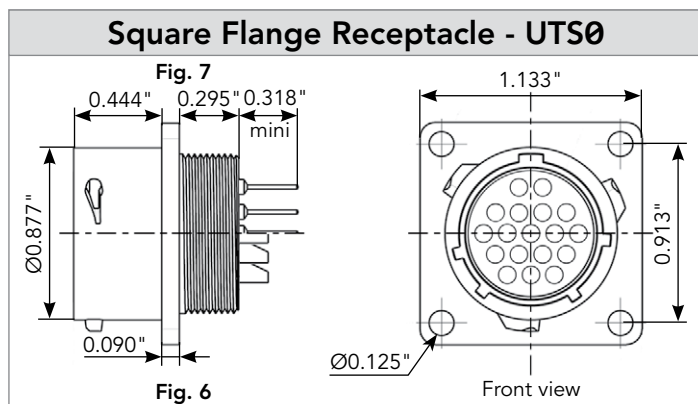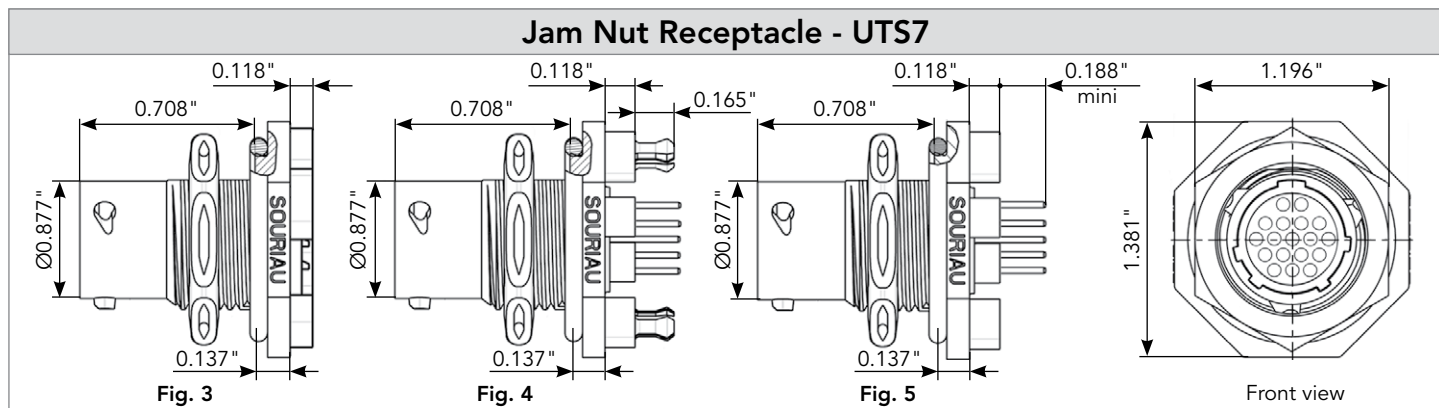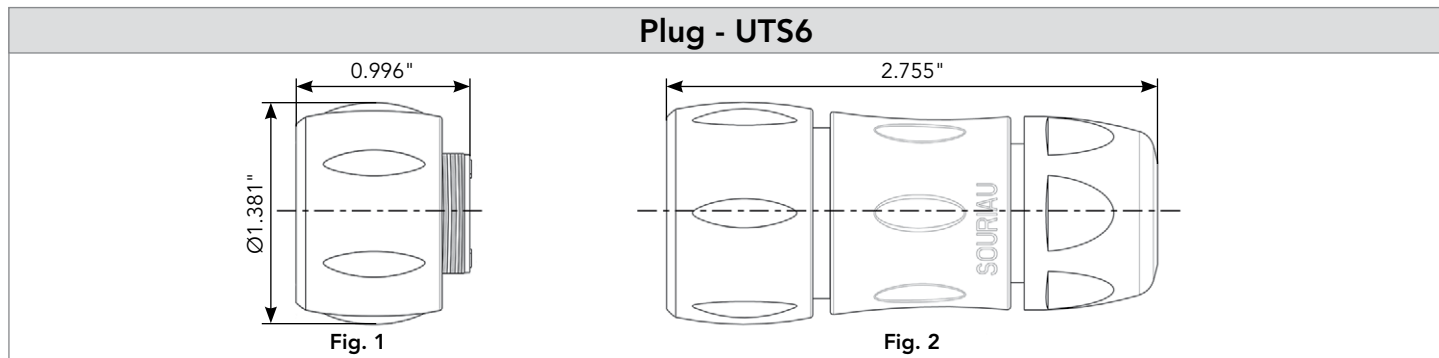

# 14E18/14D18 (Shell size 14, 18x#20)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number

UTS14DCG



IP68/69K

Metal terminal

Part number

UTS14DCGR

### Plug Sealing Cap



IP68/69K

Part number

UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number

UTS14DCGE

### Plastic Protective Cap



Part numbers

Receptacle  
cap

85005588A

Plug cap

85005597

### Gasket



IP68/69K

Part numbers

UTFD14B

### Color Coding Rings

G for Green


Y for  
Yellow

R for Red

Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG

# 14E18/14D18 (Shell size 14, 18x#20)

## Contacts

| #20        | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Handsolder | Loaded in the connector                          | Min 0.4μ gold over 0.8μ Ni | 22 to 18               | 0.196"                |
| PCB        | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4μ gold over 0.8μ Ni | -                      | -                     |

(1): For dimensions see page 169


### Electrical Characteristics

**UL**  
4A 250V UL94 HB


**CSA**  
4A 250V UL94 HB

**IEC**  
5A 50V 1.5kV 3

### UTS 14E18/14D18 Derating Curves

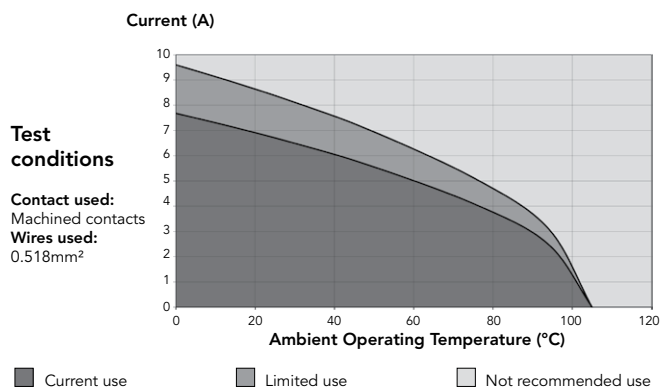

# 1419 - 14E19/14D19 (Shell size 14, 19x#20)

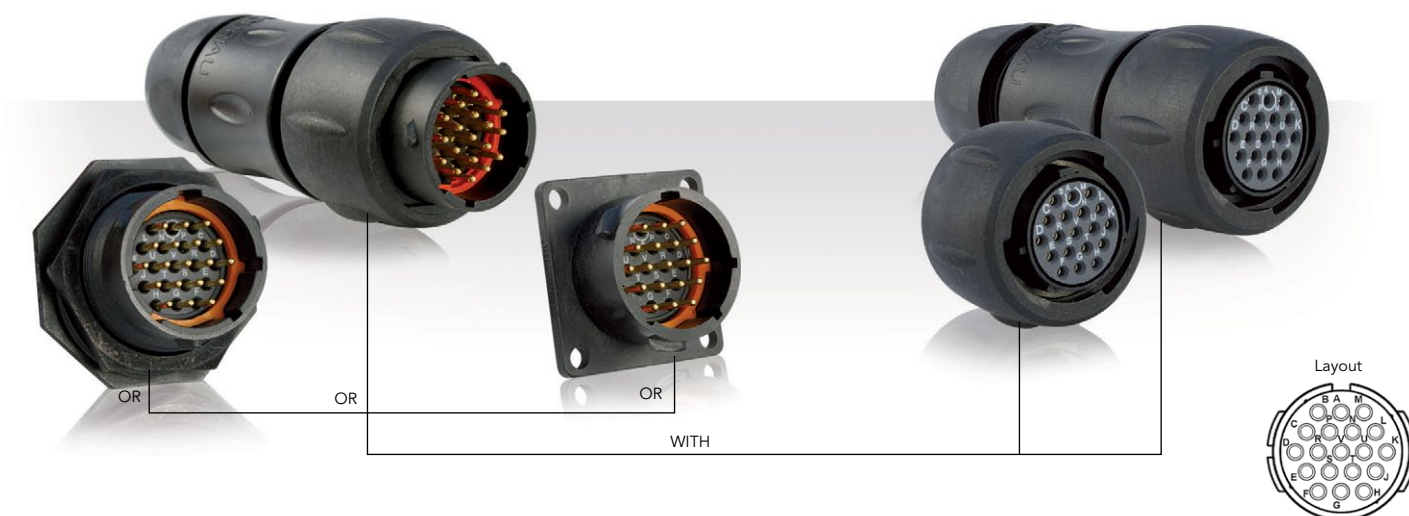

## Connector Part Numbers

| Contact type                                        | Connector type                                                | Backshell            | Part number         |                     |
|-----------------------------------------------------|---------------------------------------------------------------|----------------------|---------------------|---------------------|
|                                                     |                                                               |                      | Male insert         | Female insert       |
| Crimp contacts supplied separately see page 143     | Free hanging receptacle                                       | Cable gland (Fig. 1) | <b>UTS1JC1419P</b>  | <b>UTS1JC1419S</b>  |
|                                                     | Plug                                                          | Without (Fig. 2)     | <b>UTS61419P</b>    | <b>UTS61419S</b>    |
|                                                     | Plug                                                          | Cable gland (Fig. 3) | <b>UTS6JC1419P</b>  | <b>UTS6JC1419S</b>  |
|                                                     | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS71419P</b>    | <b>UTS71419S</b>    |
| PCB contacts supplied separately see page 143       | Jam nut receptacle                                            | Without (Fig. 4)     | <b>UTS71419P</b>    | <b>UTS71419S</b>    |
| Hand solder electrical contacts loaded see page 143 | Square flange receptacle                                      | Without (Fig. 8)     | <b>UTS014E19P</b>   | <b>UTS014E19S</b>   |
|                                                     | Plug                                                          | Without (Fig. 2)     | <b>UTS614E19P</b>   | <b>UTS614E19S</b>   |
|                                                     |                                                               | Cable gland (Fig. 3) | <b>UTS6JC14E19P</b> | <b>UTS6JC14E19S</b> |
|                                                     | Jam nut receptacle                                            | Without (Fig. 5)     | <b>UTS714E19P</b>   | <b>UTS714E19S</b>   |
| PCB contacts loaded see page 143                    | Square flange receptacle                                      | Without (Fig. 9)     | <b>UTS014D19P</b>   | <b>UTS014D19S</b>   |
|                                                     | Jam nut receptacle with stand off and with hold down clips    | Without (Fig. 6)     | <b>UTS714D19P32</b> | <b>UTS714D19S32</b> |
|                                                     | Jam nut receptacle with stand off and without hold down clips | Without (Fig. 7)     | <b>UTS714D19P</b>   | <b>UTS714D19S</b>   |








Possibilities of discrimination/keying methods see page 208

Sealed unmatd



# 1419 - 14E19/14D19 (Shell size 14, 19x#20)

## Dimensions

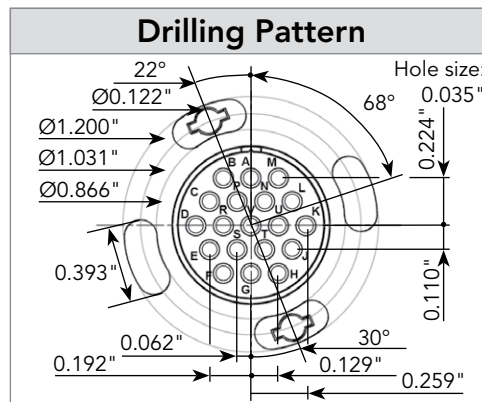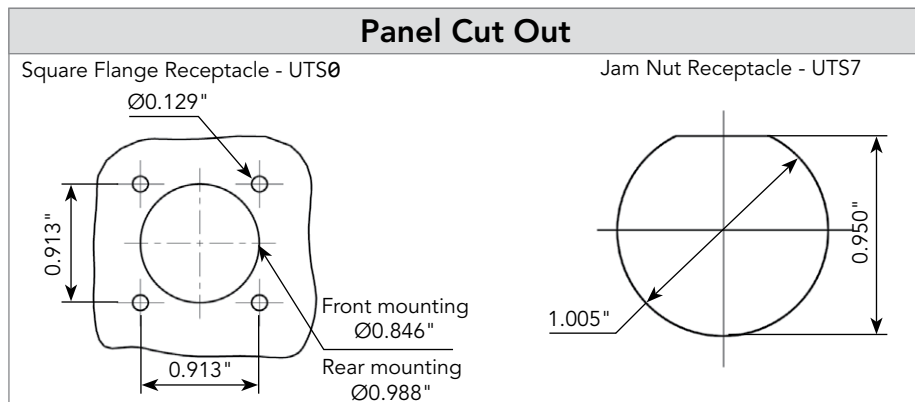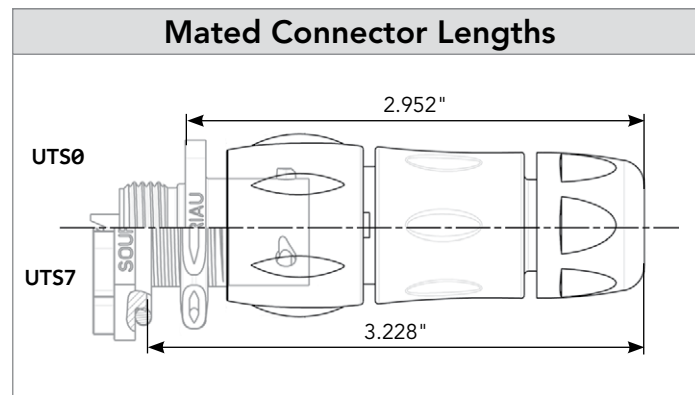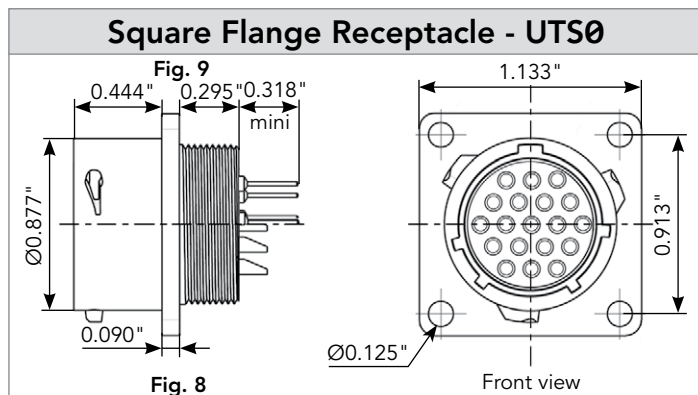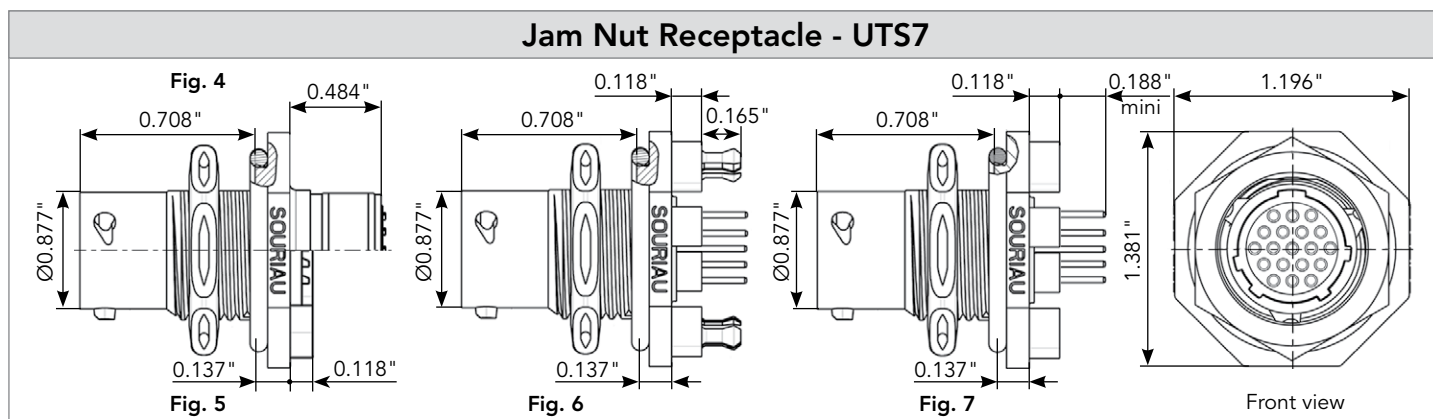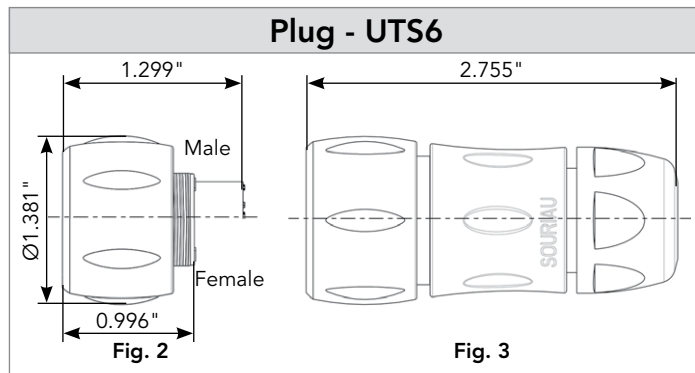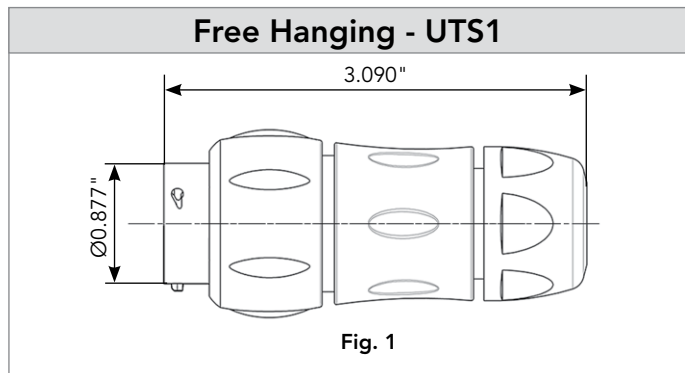

# 1419 - 14E19/14D19 (Shell size 14, 19x#20)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS14DCG



IP68/69K

Metal terminal

Part number  
UTS14DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS614DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS14DCGE

### Plastic Protective Cap



Part numbers

Receptacle  
cap  
85005588A

Plug cap  
85005597

### Gasket



IP68/69K

Part numbers  
UTFD14B

### Crimp Tooling (without Shandles)



| Contacts                   | Contact size                         | Part number of head |
|----------------------------|--------------------------------------|---------------------|
| RM/RC 24W3K <sup>(1)</sup> | Standard contacts<br>#20<br>Ø 1.0 mm | S20RCM*             |
| RM/RC 20W3K <sup>(1)</sup> |                                      | S20RCM*             |
| RM/RC 18W3K <sup>(1)</sup> |                                      | S20RCM*             |
| SM/SC 24WL3S               |                                      | S20SCM20*           |
| SM/SC 20WL3S               |                                      | S20SCM20*           |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES



Handle



Head



Complete set

### Color Coding Rings

G for Green


Y for  
Yellow


R for Red



Part numbers

Receptacles

Plugs

UTS714CCRR

UTS614CCRR

UTS714CCRY

UTS614CCRY

UTS714CCRG

UTS614CCRG

### Extraction Tool #20



Part number  
RX20D44

## 1419 - 14E19/14D19 (Shell size 14, 19x#20)

### Contacts for 1419

| #20   | Contact type                                                     | Wire size               |                 | Part number              |                          | Max wire Ø | Max insulator Ø |
|-------|------------------------------------------------------------------|-------------------------|-----------------|--------------------------|--------------------------|------------|-----------------|
|       |                                                                  | AWG                     | mm <sup>2</sup> | Male                     | Female                   |            |                 |
| Crimp | Machined                                                         | 26-24                   | 0.13-0.20       | RM24W3K <sup>(1)</sup>   | RC24W3K <sup>(1)</sup>   | 0.031 "    | 0.062 "         |
|       |                                                                  | 22-20                   | 0.32-0.52       | RM20W3K <sup>(1)</sup>   | RC20W3K <sup>(1)</sup>   | 0.045 "    | 0.062 "         |
|       |                                                                  | 20-18                   | 0.50-0.80       | RM18W3K <sup>(1)</sup>   | RC18W3K <sup>(1)</sup>   | 0.051 "    | 0.082 "         |
|       | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                   | 0.13-0.20       | SM24W3TK6 <sup>(2)</sup> | SC24W3TK6 <sup>(2)</sup> | -          | 0.035 "-0.062 " |
|       |                                                                  | 26-24                   | 0.13-0.20       | SM24W3S26 <sup>(2)</sup> | SC24W3S25 <sup>(2)</sup> | -          | 0.035 "-0.062 " |
|       |                                                                  | 22-20                   | 0.32-0.52       | SM20W3TK6 <sup>(2)</sup> | SC20W3TK6 <sup>(2)</sup> | -          | 0.047 "-0.082 " |
|       |                                                                  | 22-20                   | 0.32-0.52       | SM20W3S26 <sup>(2)</sup> | SC20W3S25 <sup>(2)</sup> | -          | 0.047 "-0.082 " |
|       | PCB                                                              | Machined <sup>(3)</sup> | -               | -                        | RMW5016K                 | RCW5016K   | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 172

### Contacts for 14E19/14D19


| #20         | Contact type                                     | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|--------------------------------------------------|----------------------------|------------------------|-----------------------|
| Hand solder | Loaded in the connector                          | Min 0.4µ gold over 0.8µ Ni | 22 to 18               | 0.196"                |
| PCB         | Machined, loaded in the connector <sup>(1)</sup> | Min 0.4µ gold over 0.8µ Ni | -                      | -                     |

(1): For dimensions see page 169

#### Electrical Characteristics

|                                                  |                                                        |
|--------------------------------------------------|--------------------------------------------------------|
| <b>UTS 1419</b><br><b>UL</b><br>5A 250V UL94 V-0 | <b>UTS 14E19/14D19</b><br><b>UL</b><br>4A 250V UL94 HB |
| <b>CSA</b><br>4A 250V UL94 V-0                   | <b>CSA</b><br>4A 250V UL94 HB                          |
| <b>IEC</b><br>5A 32V 1.5kV 3                     |                                                        |

#### UTS 1419 - 14E19/14D19 Derating Curves

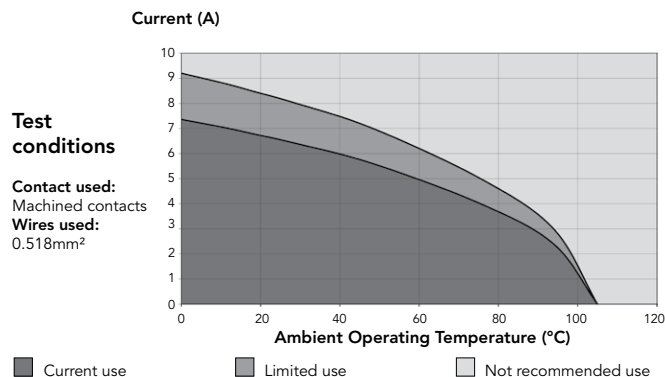

## 1823 (Shell size 18, 23x#16)










## Connector Part Numbers

| Contact type                                    | Connector type           | Backshell            | Part number        |                    |
|-------------------------------------------------|--------------------------|----------------------|--------------------|--------------------|
|                                                 |                          |                      | Male insert        | Female insert      |
| Crimp contacts supplied separately see page 147 | Square flange receptacle | Without (Fig. 1)     | <b>UTS01823P</b>   | <b>UTS01823S</b>   |
|                                                 | Free hanging receptacle  | Cable gland (Fig. 2) | <b>UTS1JC1823P</b> | <b>UTS1JC1823S</b> |
|                                                 | Plug                     | Without (Fig. 3)     | <b>UTS61823P</b>   | <b>UTS61823S</b>   |
|                                                 | Plug                     | Cable gland (Fig. 4) | <b>UTS6JC1823P</b> | <b>UTS6JC1823S</b> |
|                                                 | Jam nut receptacle       | Without (Fig. 5)     | <b>UTS71823P</b>   | <b>UTS71823S</b>   |
| PCB contacts supplied separately see page 147   | Square flange receptacle | Without (Fig. 1)     | <b>UTS01823P</b>   | <b>UTS01823S</b>   |
|                                                 | Jam nut receptacle       | Without (Fig. 5)     | <b>UTS71823P</b>   | <b>UTS71823S</b>   |

Possibilities of discrimination/keying methods see page 208

# 1823 (Shell size 18, 23x#16)

## Dimensions

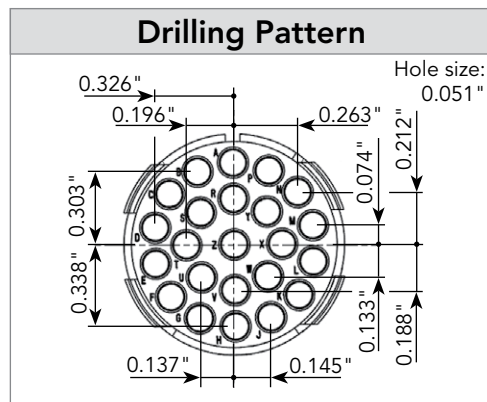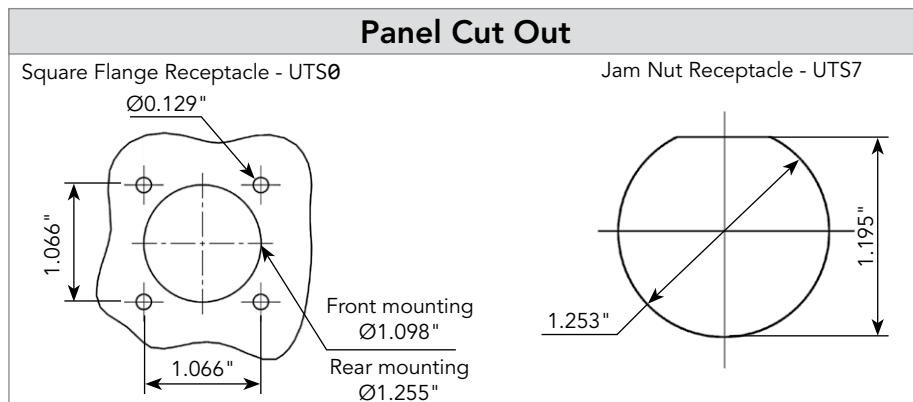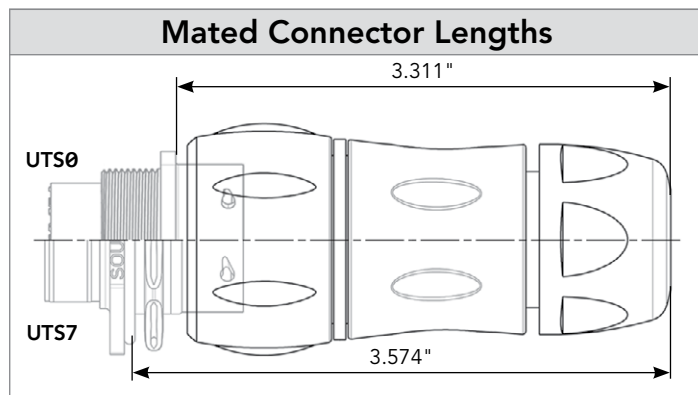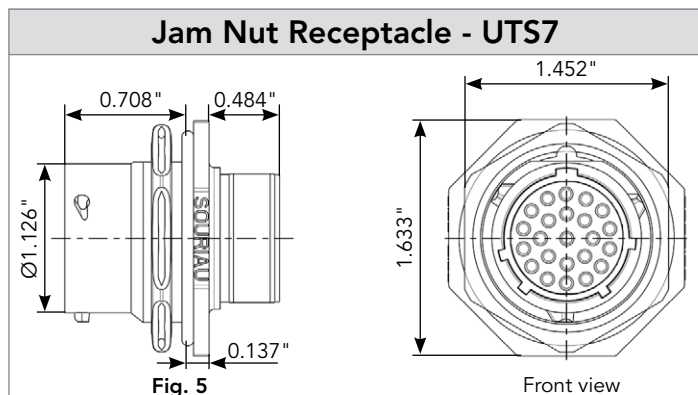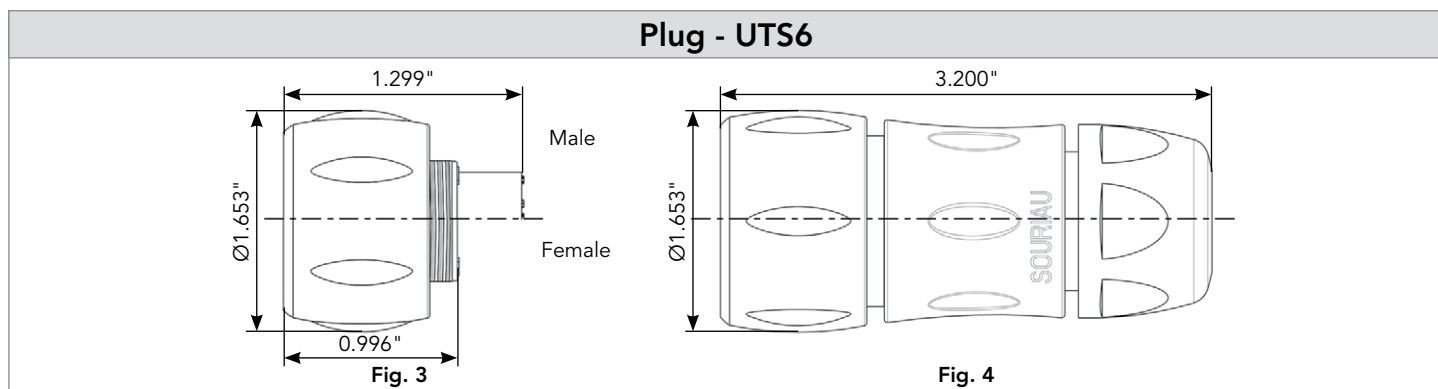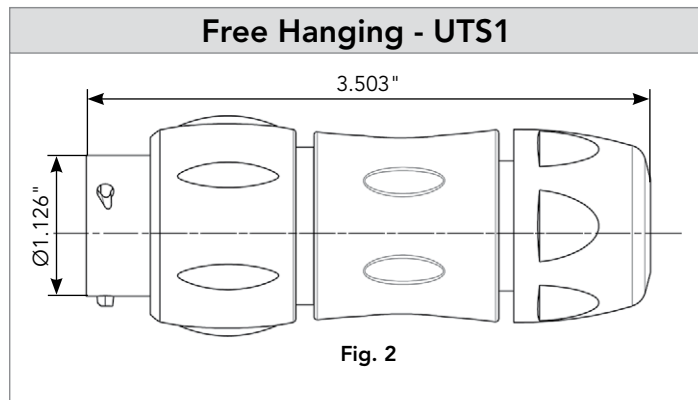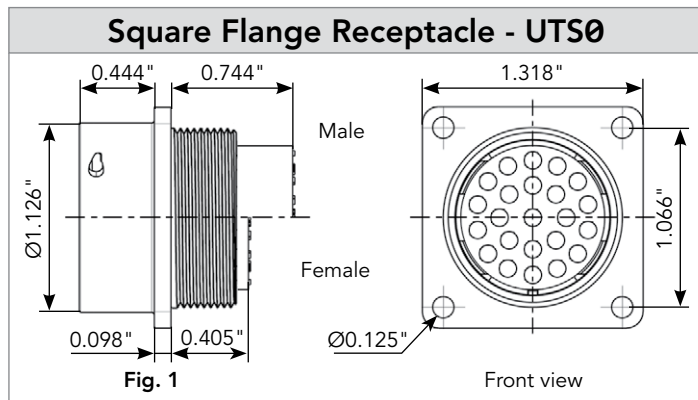

Note: all dimensions are in inches



**1823** (Shell size 18, 23x#16)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS18DCG



IP68/69K

Metal terminal

Part number  
UTS18DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS618DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS18DCGE

### Plastic Protective Cap



Part numbers

Receptacle  
cap  
85005590A

Plug cap  
85005599

### Gasket



IP68/69K

Part numbers  
UTFD16B

### Color Coding Rings

G for Green


Y for  
Yellow


R for Red



Part numbers

Receptacles

Plugs

UTS718CCRR

UTS618CCRR

UTS718CCRY

UTS618CCRY

UTS718CCRG

UTS618CCRG

### Crimp Tooling (without Shandles)



| Contacts                       | Contact size                         | Part number of head                                                |
|--------------------------------|--------------------------------------|--------------------------------------------------------------------|
| RM/RC 28M1K <sup>(1)</sup>     | Standard contacts<br>#16<br>Ø 1.6 mm | S16RCM20*                                                          |
| RM/RC 24M9K <sup>(1)</sup>     |                                      | S16RCM20*                                                          |
| RM/RC 20M13K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 20M12K <sup>(1)</sup>    |                                      | S16RCM20*                                                          |
| RM/RC 16M23K <sup>(1)</sup>    |                                      | S16RCM16*                                                          |
| RM/RC 14M30K <sup>(1)</sup>    |                                      | S16RCM14*                                                          |
| SM/SC 24ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 20ML1TK6 <sup>(1)</sup>  |                                      | S16SCM20*                                                          |
| SM/SC 16ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 14ML1TK6 <sup>(1)</sup>  |                                      | S16SCML1*                                                          |
| SM/SC 16ML11TK6 <sup>(1)</sup> |                                      | S16SCML11*                                                         |
| RMDXK10D28K                    | Coaxial contacts                     | M10S1J<br>with die set<br>& stop bushing<br>see page<br>202 to 205 |
| RCDXK1D28K                     |                                      |                                                                    |
| RM/RC DX60xxD28K               |                                      |                                                                    |
| RM/RC DXK10D28 +<br>york090    |                                      |                                                                    |
| RM/RC DX60xxD28                |                                      |                                                                    |

(1): Example of plating, for other plating options see page 164

\* Heads to be used with handle PN: SHANDLES



Handle



Head



Complete set

# 1823 (Shell size 18, 23x#16)

## Contacts

| #16         | Contact type                                                     | Wire size                 |           | Part number                  |                              | Max wire Ø | Max insulator Ø |
|-------------|------------------------------------------------------------------|---------------------------|-----------|------------------------------|------------------------------|------------|-----------------|
|             |                                                                  | AWG                       | mm²       | Male                         | Female                       |            |                 |
| Crimp       | Machined                                                         | 30-28                     | 0.50-0.08 | RM28M1K <sup>(1)</sup>       | RC28M1K <sup>(1)</sup>       | 0.021 "    | 0.039 "         |
|             |                                                                  | 26-24                     | 0.13-0.20 | RM24M9K <sup>(1)</sup>       | RC24M9K <sup>(1)</sup>       | 0.031 "    | 0.062 "         |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M13K <sup>(1)</sup>      | RC20M13K <sup>(1)</sup>      | 0.045 "    | 0.070 "         |
|             |                                                                  | 22-20                     | 0.32-0.52 | RM20M12K <sup>(1)</sup>      | RC20M12K <sup>(1)</sup>      | 0.045 "    | 0.086 "         |
|             |                                                                  | 20-16                     | 0.52-1.31 | RM16M23K <sup>(1)</sup>      | RC16M23K <sup>(1)</sup>      | 0.070 "    | 0.125 "         |
|             |                                                                  | 16-14                     | 1.31-2.08 | RM14M30K <sup>(1)</sup>      | RC14M30K <sup>(1)</sup>      | 0.090 "    | 0.125 "         |
|             | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24                     | 0.13-0.20 | SM24M1TK6 <sup>(1)(2)</sup>  | SC24M1TK6 <sup>(1)(2)</sup>  | -          | 0.035 "-0.062 " |
|             |                                                                  | 22-20                     | 0.32-0.52 | SM20M1TK6 <sup>(1)(2)</sup>  | SC20M1TK6 <sup>(1)(2)</sup>  | -          | 0.047 "-0.082 " |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M1TK6 <sup>(1)(2)</sup>  | SC16M1TK6 <sup>(1)(2)</sup>  | -          | 0.125 "         |
|             |                                                                  | 18-16                     | 0.80-1.31 | SM16M11TK6 <sup>(1)(2)</sup> | SC16M11TK6 <sup>(1)(2)</sup> | -          | 0.118 "         |
|             |                                                                  | 14                        | 2.08      | SM14M1TK6 <sup>(1)(2)</sup>  | SC14M1TK6 <sup>(1)(2)</sup>  | -          | 0.125 "         |
| PCB         | Machined <sup>(3)</sup>                                          | -                         | -         | RM20M12E83K <sup>(1)</sup>   | RC20M12E84K <sup>(1)</sup>   | -          | -               |
| Coaxial     | Cable Multipiece                                                 | see pages 167, 200 to 206 |           | RMDXK10D28                   | RCDXK1D28                    | -          | -               |
|             | Cable Monocrimp                                                  |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
|             | Twisted pair Multipiece                                          |                           |           | RMDXK10D28 + york090         | RCDXK1D28 + york090          | -          | -               |
|             | Twisted pair Monocrimp                                           |                           |           | RMDX60xxD28                  | RCDX60xxD28                  | -          | -               |
| Fiber optic | POF contacts (Plastic Optical Fiber)                             | see page 170              |           | RMPOF1000                    | RCPOF1000B                   | -          | -               |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 172

Note: all dimensions are in inches


### Electrical Characteristics

**UL**  
10A 500V UL94 V-0

**CSA**  
7A 500V UL94 V-0

**IEC**  
9A 63V 1.5kV 3

### UTS 1823 Derating Curves

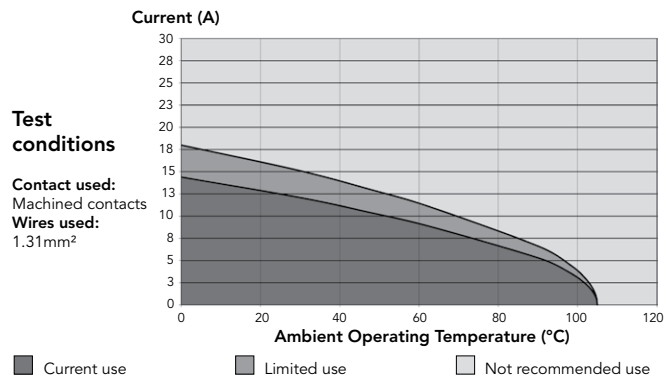



## 1832 - 18E32 (Shell size 18, 32x#20)



## Connector Part Numbers

| Contact type                                                 | Connector type              | Backshell            | Part number        |                    |
|--------------------------------------------------------------|-----------------------------|----------------------|--------------------|--------------------|
|                                                              |                             |                      | Male insert        | Female insert      |
| Crimp<br>Contact supplied<br>separately<br>see page 151      | Free hanging<br>receptacle  | Cable gland (Fig. 2) | <b>UTS1JC1832P</b> | <b>UTS1JC1832S</b> |
|                                                              | Plug                        | Without (Fig. 3)     | <b>UTS61832P</b>   | <b>UTS61832S</b>   |
|                                                              | Plug                        | Cable gland (Fig. 4) | <b>UTS6JC1832P</b> | <b>UTS6JC1832S</b> |
|                                                              | Jam nut<br>receptacle       | Without (Fig. 5)     | <b>UTS71832P</b>   | <b>UTS71832S</b>   |
| PCB<br>contacts supplied<br>separately<br>see page 151       | Jam nut<br>receptacle       | Without (Fig. 5)     | <b>UTS71832P</b>   | <b>UTS71832S</b>   |
| Hand solder<br>electrical contacts<br>loaded<br>see page 151 | Square flange<br>receptacle | Without (Fig. 1)     | <b>UTS018E32P</b>  | -                  |

Possibilities of discrimination/keying methods see page 208

Sealed unmated



1832 - 18E32 (Shell size 18, 32x#20)

## Accessories and Tooling

### Jam Nut Sealing Caps



IP68/69K

Part number  
UTS18DCG



IP68/69K

Metal terminal

Part number  
UTS18DCGR

### Handle (without Head)



Part number  
SHANDLES

### Tool Kit



Part number  
TOOLKIT

### Plug Sealing Cap



IP68/69K

Part number  
UTS618DCG

### Square Flange Sealing Cap



IP68/69K

Metal terminal

Part number  
UTS18DCGE

### Crimp Tooling (without Shandles)



| Contacts                   | Contact size                         | Part number of head |
|----------------------------|--------------------------------------|---------------------|
| RM/RC 24W3K <sup>(1)</sup> | Standard contacts<br>#20<br>Ø 1.0 mm | S20RCM*             |
| RM/RC 20W3K <sup>(1)</sup> |                                      | S20RCM*             |
| RM/RC 18W3K <sup>(1)</sup> |                                      | S20RCM*             |
| SM/SC 24WL3S               |                                      | S20SCM20*           |
| SM/SC 20WL3S               |                                      | S20SCM20*           |

(1): Example of plating, for other plating see page 164

\*: Heads to be used with handle PN: SHANDLES

### Plastic Protective Cap



Part numbers

| Receptacle cap | Plug cap |
|----------------|----------|
| 85005590A      | 85005599 |

### Gasket



IP68/69K

Part numbers  
UTFD16B

### Color Coding Rings

G for Green



Y for Yellow



R for Red



Part numbers

| Receptacles | Plugs      |
|-------------|------------|
| UTS718CCRR  | UTS618CCRR |
| UTS718CCRY  | UTS618CCRY |
| UTS718CCRG  | UTS618CCRG |

### Extraction Tool #20



Part number  
RX20D44



Handle

+



Head

=



Complete set

# 1832 - 18E32 (Shell size 18, 32x#20)

## Contacts

| #20   | Contact type                                                     | Wire size |                 | Part number              |                          | Max wire Ø | Max insulator Ø | Wire stripping length |
|-------|------------------------------------------------------------------|-----------|-----------------|--------------------------|--------------------------|------------|-----------------|-----------------------|
|       |                                                                  | AWG       | mm <sup>2</sup> | Male                     | Female                   |            |                 |                       |
| Crimp | Machined                                                         | 26-24     | 0.13-0.20       | RM24W3K <sup>(1)</sup>   | RC24W3K <sup>(1)</sup>   | 0.031"     | 0.062"          | 0.188"                |
|       |                                                                  | 22-20     | 0.32-0.52       | RM20W3K <sup>(1)</sup>   | RC20W3K <sup>(1)</sup>   | 0.045"     | 0.062"          | 0.188"                |
|       |                                                                  | 20-18     | 0.50-0.80       | RM18W3K <sup>(1)</sup>   | RC18W3K <sup>(1)</sup>   | 0.051"     | 0.082"          | 0.188"                |
|       | Stamped & Formed reeled contacts<br>See note (2) for loose piece | 26-24     | 0.13-0.20       | SM24W3TK6 <sup>(2)</sup> | SC24W3TK6 <sup>(2)</sup> | -          | 0.035"-0.062"   | 0.157"                |
|       |                                                                  | 26-24     | 0.13-0.20       | SM24W3S6 <sup>(2)</sup>  | SC24W3S25 <sup>(2)</sup> | -          | 0.035"-0.062"   | 0.157"                |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3TK6 <sup>(2)</sup> | SC20W3TK6 <sup>(2)</sup> | -          | 0.047"-0.082"   | 0.157"                |
|       |                                                                  | 22-20     | 0.32-0.52       | SM20W3S6 <sup>(2)</sup>  | SC20W3S25 <sup>(2)</sup> | -          | 0.047"-0.082"   | 0.157"                |
| PCB   | Machined <sup>(3)</sup>                                          | -         | -               | RMW5016K                 | RCW5016K                 | -          | -               | -                     |

(1): Example of plating, for other plating see page 164

(2): For loose piece contact packaging, place "L" in part number. Example: SM20WL3TK6

(3): For dimensions see page 172

Note: all dimensions are in inches

| #20         | Contact type            | Plating                    | Cable acceptance (AWG) | Wire stripping length |
|-------------|-------------------------|----------------------------|------------------------|-----------------------|
| Hand solder | Loaded in the connector | Min 0.4µ gold over 0.8µ Ni | 22 to 18               | 0.196"                |


## Electrical Characteristics

**UL**  
5A 250V UL94 V-0

**CSA**  
4A 250V UL94 V-0

**IEC**  
4A 32V 1.5kV 3

## UTS 1832 - 18E32 Derating Curves

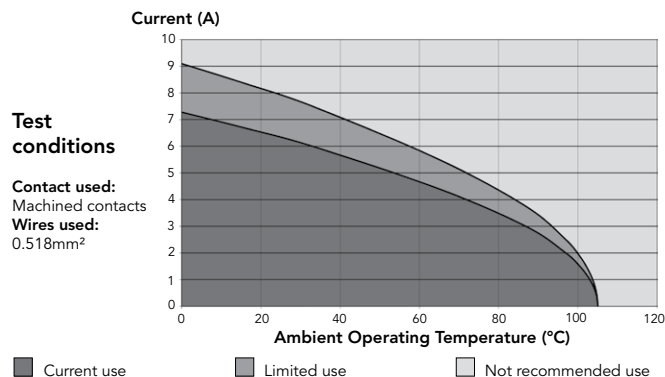

LC (Fiber Optic)



Connector Part Numbers

| Connector type          | Backshell            | Part number |               |
|-------------------------|----------------------|-------------|---------------|
|                         |                      | Male insert | Female insert |
| Free hanging receptacle | Cable gland (Fig. 1) | UTS1JC18LCN | -             |
| Plug                    | Cable gland (Fig. 2) | -           | UTS6JC18LCN   |
| Jam nut receptacle      | Without (Fig. 3)     | UTS718LCN   | -             |

LC contacts not included  
For IP rating and general details please consult us

## LC (Fiber Optic)

## Dimensions

### Free Hanging Receptacle -UTS1JC18LCN

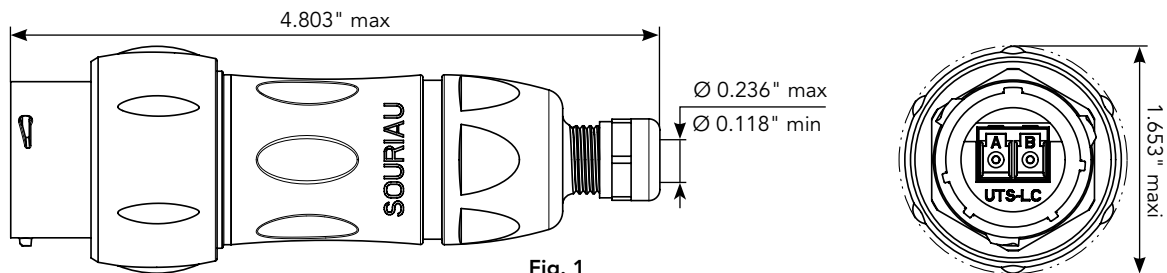


Fig. 1

### Plug - UTS6JC18LCN

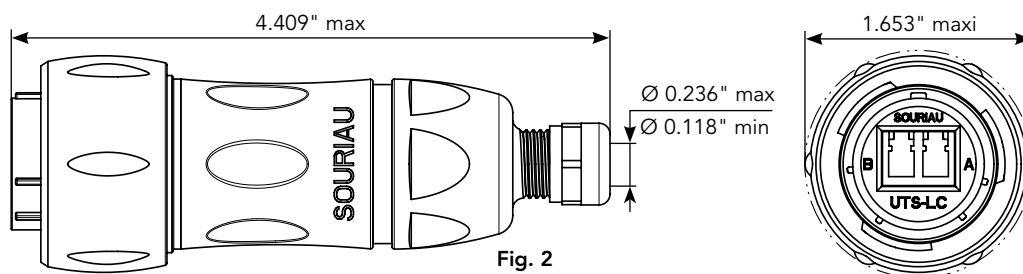


Fig. 2

### Jam Nut Receptacle - UTS718LCN


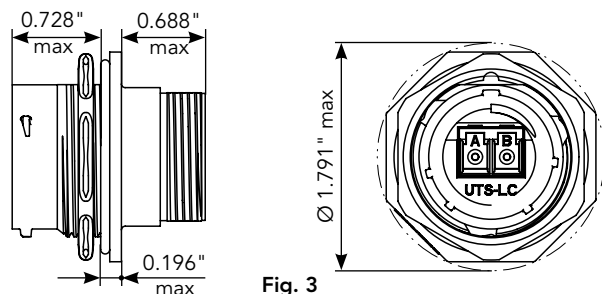



Fig. 3

### Mated Connector Length - UTS7

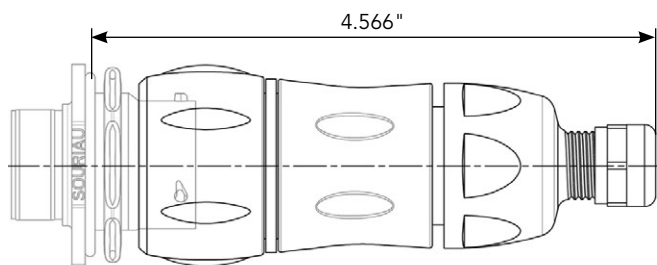

### Panel Cut Out

Jam Nut Receptacle - UTS7



LC (Fiber Optic)


Accessories

| Sealing Caps                                                                      |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------|-----------|
| For UTS6JC18LCN                                                                   |                                                                          | For UTS1JC18LCN & UTS718LCN |            |                                                                                    |                                                                         |             |           |
|  | <table><tr><th>Part number</th></tr><tr><td>UTS618DCG2</td></tr></table> | Part number                 | UTS618DCG2 |  | <table><tr><th>Part number</th></tr><tr><td>UTS18DCG2</td></tr></table> | Part number | UTS18DCG2 |
| Part number                                                                       |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| UTS618DCG2                                                                        |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| Part number                                                                       |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| UTS18DCG2                                                                         |                                                                          |                             |            |                                                                                    |                                                                         |             |           |





MPO (Fiber Optic)

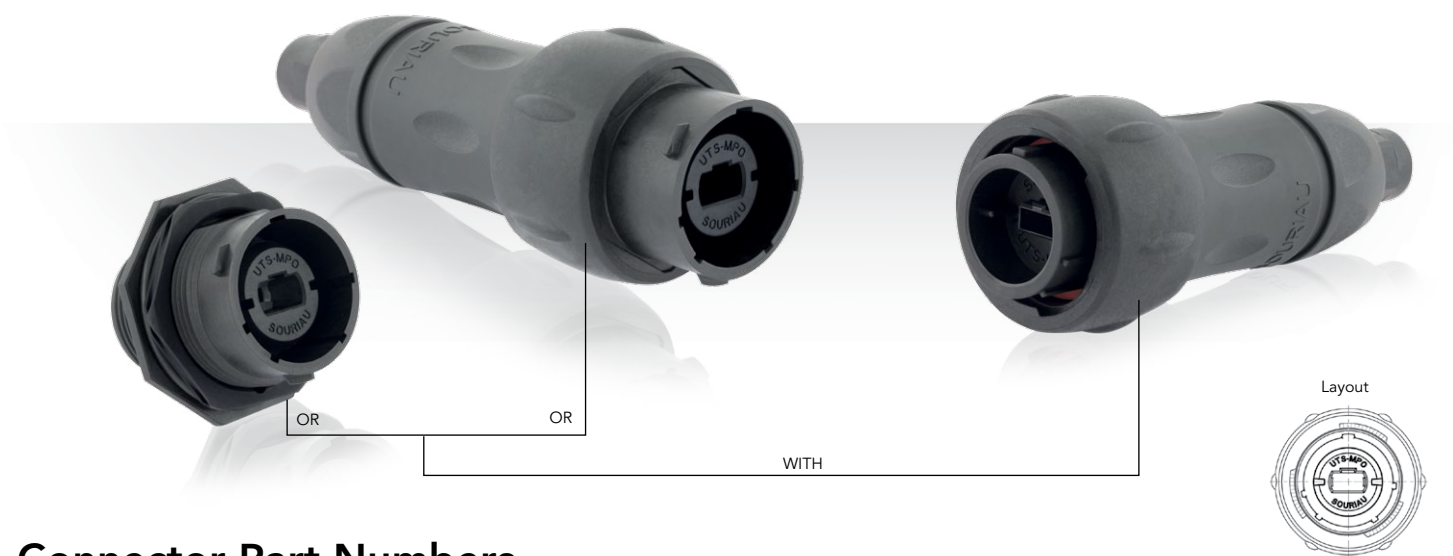

Connector Part Numbers

| Connector type          | Backshell            | Part number |               |
|-------------------------|----------------------|-------------|---------------|
|                         |                      | Male insert | Female insert |
| Free hanging receptacle | Cable gland (Fig. 1) | UTS1JC18MPN | -             |
| Plug                    | Cable gland (Fig. 2) | -           | UTS6JC18MPN   |
| Jam nut receptacle      | Without (Fig. 3)     | UTS718MPN   | -             |

LC contacts not included  
For IP rating and general details please consult us

## MPO (Fiber Optic)

### Dimensions

#### Free Hanging Receptacle - UTS1JC18MPN

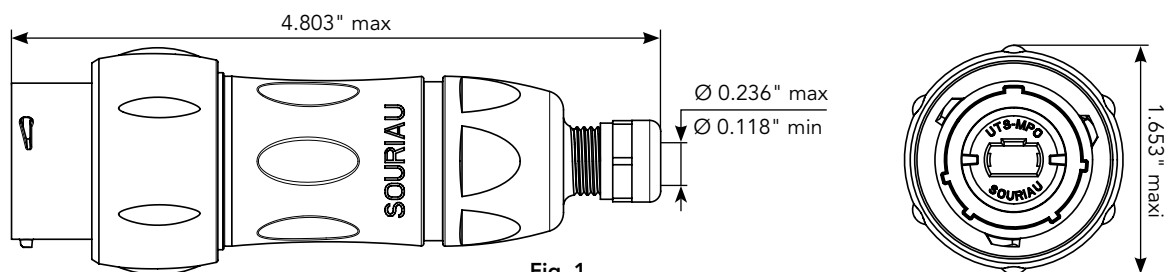


Fig. 1

#### Plug - UTS6JC18MPN

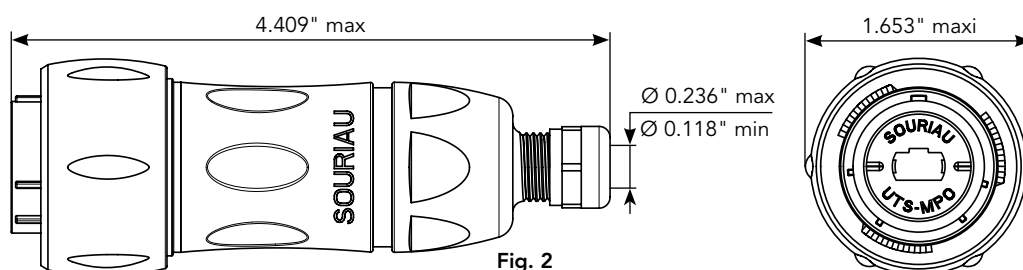


Fig. 2

#### Jam Nut Receptacle - UTS718MPN


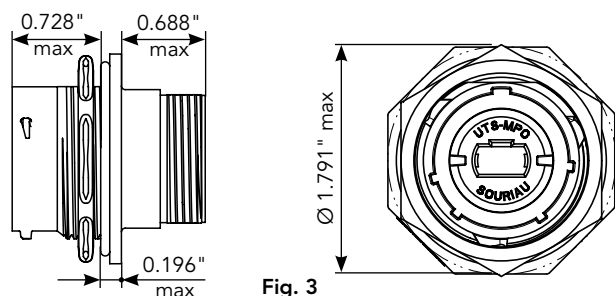



Fig. 3

#### Mated Connector Length - UTS7

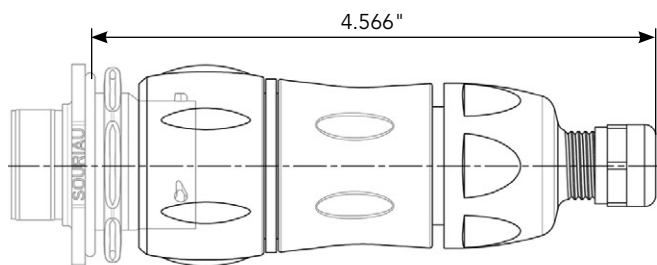

#### Panel Cut Out

Jam Nut Receptacle - UTS7

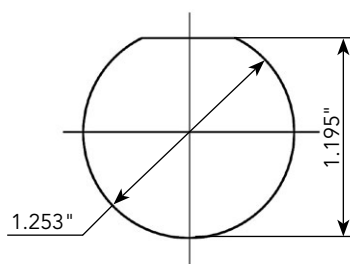

MPO (Fiber Optic)

Accessories

| Sealing Caps                                                                      |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------|-----------|
| For UTS6JC18MPN                                                                   |                                                                          | For UTS1JC18MPN & UTS718MPN |            |                                                                                    |                                                                         |             |           |
|  | <table><tr><th>Part number</th></tr><tr><td>UTS618DCG2</td></tr></table> | Part number                 | UTS618DCG2 |  | <table><tr><th>Part number</th></tr><tr><td>UTS18DCG2</td></tr></table> | Part number | UTS18DCG2 |
| Part number                                                                       |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| UTS618DCG2                                                                        |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| Part number                                                                       |                                                                          |                             |            |                                                                                    |                                                                         |             |           |
| UTS18DCG2                                                                         |                                                                          |                             |            |                                                                                    |                                                                         |             |           |



# UTS SERIES

# Contacts

|                                        |     |
|----------------------------------------|-----|
| ■ Description .....                    | 162 |
| ■ Contact Plating Selector Guide ..... | 163 |
| ■ Contact Selector Guide .....         | 164 |
| ■ Packaging .....                      | 164 |
| ■ Crimp Contacts .....                 | 165 |
| ■ #16 Coaxial Contacts .....           | 167 |
| ■ PCB Contacts .....                   | 168 |
| ■ Fiber Optic Contacts .....           | 170 |



## Contacts



### Description

The UTS series is delivered with (solder, PCB versions and screw termination) or without contact (crimp version) and offers the unique feature to use the same contact style in any layout with the same active part size (i.e. #20, #16, #12, etc.). This provides our customers with an easy solution to buy only one type of contact to equip all their connectors even if housings/shell sizes are different.

This provides the benefit of standardization and subsequent reduced inventory costs. In addition, it eliminates the need for added tooling and simplifies the assembly process. SOURIAU contacts are designed for simple snap-in installation and further eliminate the need for insertion tooling.

In addition to the below "crimp" style contact options, the UTS series can also be equipped with PCB contacts.

Crimp contacts are available in different versions:



• Machined



• Stamped & Formed



• Coaxial



• Fiber Optic

## Contact Plating Selector Guide

Once the contact size has been selected, the next step is to decide on which type to use. SOURIAU offers two main types of electrical contacts:

- Machined
- Stamped & Formed

Machined contacts are generally chosen as a better solution for power applications or when lower quantities are needed.


Stamped & Formed contacts offer the ability to be crimped automatically which makes them more suitable for high volume production applications.

The next decision to make is: What plating should I choose?

The graph below can help guide you to plating recommendations based on application, mating cycles and current/voltage needs.

Note: To avoid galvanic couples, fretting corrosion and at the end interruption of electrical signal do not mix different platings (i.e. tin plated pin contacts with gold plated socket contacts).

**If customer mixes different contact platings, Souriau can't guarantee electrical performances.**

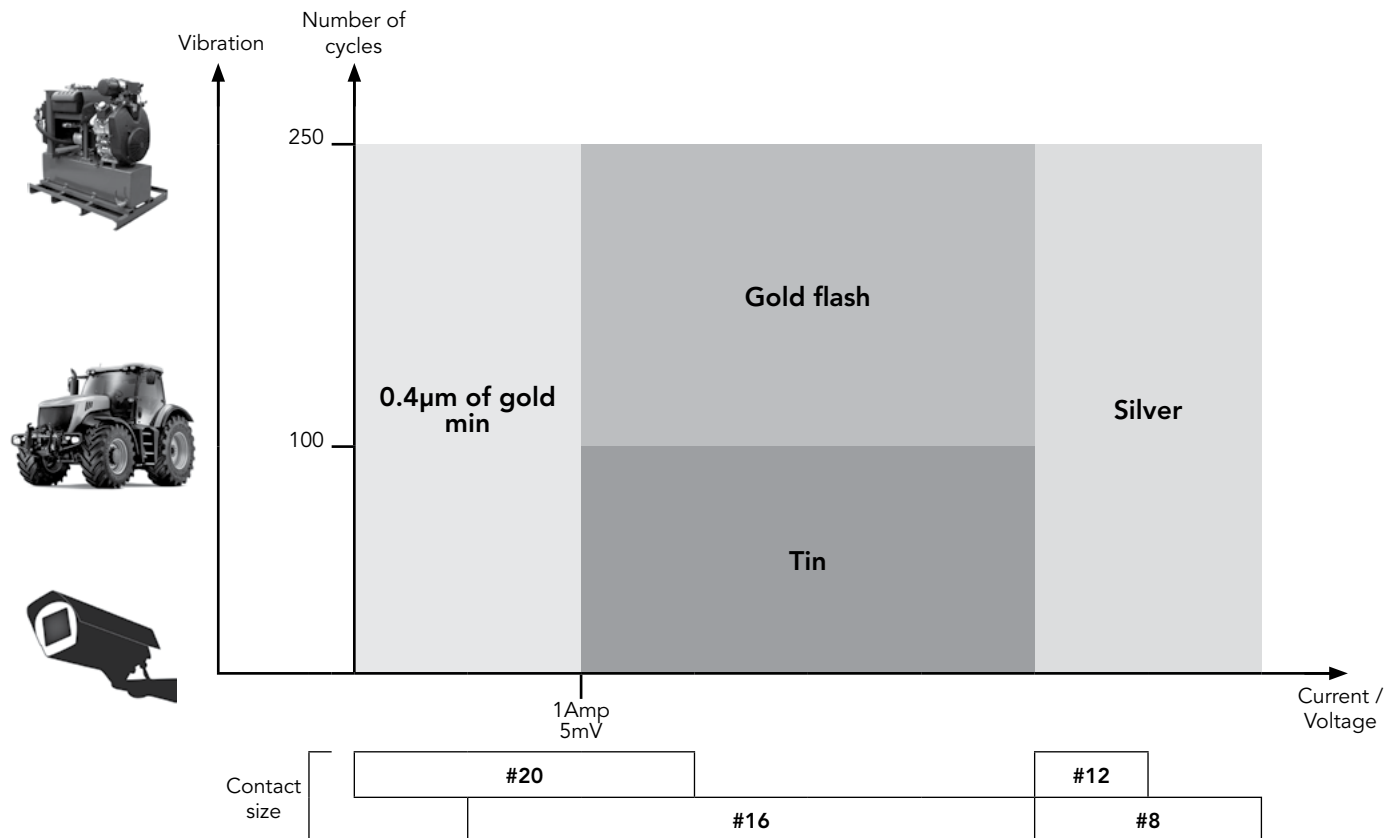

## Contact Selector Guide

### Contacts supplied separately

| Electrical characteristics: contact resistance |                  |       |
|------------------------------------------------|------------------|-------|
| #20<br>Ø0.039"                                 | Machined         | < 6mΩ |
|                                                | Stamped & Formed | < 6mΩ |
| #16<br>Ø0.062"                                 | Machined         | < 3mΩ |
|                                                | Stamped & Formed | < 6mΩ |
| #12<br>Ø0.094"                                 | Machined         | < 5mΩ |
| #8<br>Ø0.141"                                  | Machined         | < 5mΩ |

| Available platings (contacts supplied separately)        |                                                                                                              |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| A                                                        | 2µm Nickel + 2µm Ag                                                                                          |
| J                                                        | Gold flash over Nickel 2µm mini                                                                              |
| K                                                        | 0.4 µm Gold over 2 µm Nickel mini                                                                            |
| S31                                                      | Active part: Gold flash over Nickel<br>Crimp area: 1.3µm Tin mini over Nickel<br>Other: 1.3µm Tin mini       |
| S18                                                      | Active part: 0.75µm Gold mini over Nickel<br>Crimp area: 1.3µm Tin mini over Nickel<br>Other: 1.3µm Tin mini |
| S25<br>S26                                               | Active part: 0.75µm Au over Nickel<br>Crimp area: flash Au over Nickel                                       |
| TK6                                                      | 0.5µm - 2.5µm Sn pre-plated                                                                                  |
| D70                                                      | Superseded by S31                                                                                            |
| S6                                                       | Superseded by S18                                                                                            |
| Other platings on request (contacts supplied separately) |                                                                                                              |
| T                                                        | Tin 3µm (-0/+2) over 1.3µm Nickel mini                                                                       |
| D28*                                                     | 0.75µm mini Gold over 2µm Nickel mini                                                                        |
| NPC                                                      | 2 µm Ni                                                                                                      |

\* For Coax contacts only

### Contact preloaded

| Electrical characteristics: contact resistance |          |       |
|------------------------------------------------|----------|-------|
| #20<br>Ø0.039"                                 | Machined | < 4mΩ |
| #16<br>Ø0.062"                                 | Machined | < 3mΩ |

| Available plating (contact preloaded) |
|---------------------------------------|
| Min 0.4µm gold over 0.8µm Nickel      |

## Packaging

Due to the wide variety of applications, contact packaging is offered for small series (bulk package) and high volume production (reeled contacts):

### Size contacts #20 (Ø0.039") & #16 (Ø0.062")




- 25 pieces loose package (Stamped & Formed contacts)



- 50 pieces bulk package (Machined contacts)



- 1,000 pieces bulk package (Machined contacts)



- 3,000 pieces reeled (Stamped & Formed contacts)



- 2,000 pieces reeled (Machined contacts) size #16 only

### Size contacts #12 (Ø0.094") & #8 (Ø0.141")



- 100 pieces bulk package (Machined contacts)

Note: 1,000 pieces bulk package available by adding 1000 at the end of the part number: e.g. RC16M23K1000  
2,000 pieces reeled package available by adding K at the beginning of the part number: e.g. KRC16M23K

# Crimp Contacts

## Standard Version



| Contact size             | Type             | Wire size |                                                       | Part number                                           |                                                     | Max wire Ø         | Max insulator Ø    | Available plating<br>see page 164 |
|--------------------------|------------------|-----------|-------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------|--------------------|--------------------|-----------------------------------|
|                          |                  | AWG       | mm²                                                   | Male                                                  | Female                                              |                    |                    |                                   |
| #20<br>Ø1.0mm<br>Ø0.039" | Machined         | 26-24     | 0.13-0.20                                             | RM24W3K                                               | RC24W3K                                             | -                  | 0.062" max         | K                                 |
|                          | Stamped & Formed | 26-24     | 0.13-0.20                                             | SM24W3 - <sup>(1)</sup>                               | SC24W3 - <sup>(1)</sup>                             | -                  | 0.035"-0.062"      | TK6<br>S25 (female)<br>S26 (male) |
|                          |                  |           |                                                       | SM24WL3 - <sup>(2)</sup>                              | SC24WL3 - <sup>(2)</sup>                            | -                  |                    |                                   |
|                          | Machined         | 22-20     | 0.32-0.52                                             | RM20W3K                                               | RC20W3K                                             | -                  | 0.062" max         | K                                 |
|                          | Stamped & Formed | 22-20     | 0.33-0.52                                             | SM20W3 - <sup>(1)</sup>                               | SC20W3 - <sup>(1)</sup>                             | -                  | 0.046"-0.081"      | TK6<br>S25 (female)<br>S26 (male) |
|                          |                  |           |                                                       | SM20WL3 - <sup>(2)</sup>                              | SC20WL3 - <sup>(2)</sup>                            | -                  |                    |                                   |
| Machined                 | 20-18            | 0.52-0.80 | RM18W3K                                               | RC18W3K                                               |                                                     | 0.082" max         | K                  |                                   |
| #16<br>Ø1.6mm<br>Ø0.062" | Machined         | 30-28     | 0.05-0.08                                             | RM28M1 -                                              | RC28M1 -                                            | 0.021"             | 0.043"             | K, J                              |
|                          | Machined         | 26-24     | 0.13-0.20                                             | RM24M9 -                                              | RC24M9 -                                            | 0.031"             | 0.062"             | K, J                              |
|                          | Stamped & Formed | 26-24     | 0.13-0.20                                             | SM24M1 - <sup>(1)</sup><br>SM24ML1 - <sup>(2)</sup>   | SC24M1 - <sup>(1)</sup><br>SC24ML1 - <sup>(2)</sup> | 0.035"-0.050"      | No insulation grip | S31, S18, TK6                     |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
|                          | Machined         | 22-20     | 0.32-0.52                                             | RM20M13 -<br>RM20M12 -                                | RC20M13 -<br>RC20M12 -                              | 0.046"             | 0.070"<br>0.086"   | K, J                              |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
|                          | Stamped & Formed | 22-20     | 0.35-0.52                                             | SM20M1 - <sup>(1)</sup><br>SM20ML1 - <sup>(2)</sup>   | SC20M1 - <sup>(1)</sup><br>SC20ML1 - <sup>(2)</sup> | 0.046"-0.081"      | No insulation grip | S31, S18, TK6                     |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
|                          | Machined         | 20-16     | 0.52-1.31                                             | RM16M23 -                                             | RC16M23 -                                           | 0.070"             | 0.125"             | K, J                              |
|                          | Stamped & Formed | 18-16     | 0.80-1.31                                             | SM16M1 - <sup>(1)</sup><br>SM16ML1 - <sup>(2)</sup>   | SC16M1 - <sup>(1)</sup><br>SC16ML1 - <sup>(2)</sup> | 0.118"             | No insulation grip | S31, S18, TK6                     |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
| Stamped & Formed         | 18-16            | 0.80-1.31 | SM16M11 - <sup>(1)</sup><br>SM16ML11 - <sup>(2)</sup> | SC16M11 - <sup>(1)</sup><br>SC16ML11 - <sup>(2)</sup> | 0.078"-0.118"                                       | Insulation grip    | S31, S18, TK6      |                                   |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
| Machined                 | 16-14            | 1.31-20.8 | RM14M30 -                                             | RC14M30 -                                             | 0.089"                                              | 0.125"             | K, J               |                                   |
| Stamped & Formed         | 14               | 2.08      | SM14M1 - <sup>(1)</sup><br>SM14ML1 - <sup>(2)</sup>   | SC14M1 - <sup>(1)</sup><br>SC14ML1 - <sup>(2)</sup>   | 0.125"                                              | No insulation grip | S31, S18, TK6      |                                   |
|                          |                  |           |                                                       |                                                       |                                                     |                    |                    |                                   |
| #12<br>Ø2.4mm<br>Ø0.094" | Machined         | 22        | 0.32                                                  | 82911457N -                                           | 82911456 -                                          | -                  | 0.192"             | A, K                              |
|                          |                  | 20        | 0.52                                                  | 82911459N -                                           | 82911458 -                                          |                    |                    |                                   |
|                          |                  | 18        | 0.80                                                  | 82911461N -                                           | 82911460 -                                          |                    |                    |                                   |
|                          |                  | 16        | 1.31                                                  | 82911463N -                                           | 82911462 -                                          |                    |                    |                                   |
|                          |                  | 14        | 2.08                                                  | 82911465N -                                           | 82911464 -                                          |                    |                    |                                   |
|                          |                  | 12        | 3.31                                                  | 82911467N -                                           | 82911466 -                                          |                    |                    |                                   |
| #8<br>Ø3.0mm<br>Ø0.141"  | Machined         | 16        | 1.31                                                  | 82913601A                                             | 82913600A                                           | -                  | 0.255"             | A                                 |
|                          |                  | 14        | 2.08                                                  | 82913603A                                             | 82913602A                                           |                    |                    |                                   |
|                          |                  | 12        | 3.31                                                  | 82913605A                                             | 82913604A                                           |                    |                    |                                   |
|                          |                  | 10        | 5.26                                                  | 82913607A                                             | 82913606A                                           |                    |                    |                                   |
|                          |                  | 8         | 8.37                                                  | 82913609A                                             | 82913608A                                           |                    |                    |                                   |

(1) contact reeled (2) loose contact  
Example: RM24W3K - Size #20, Machined, AWG24 wire.

Note: all dimensions are in inches, other wise noted

## Crimp Contacts (Continued)

### First Mate Last Break Contacts

| Contact size                                          | Type     | Wire size |           | Part number |             | Max wire Ø (mm) | Max insulator Ø (mm) |  |      | Available plating<br>see p. 164 |
|-------------------------------------------------------|----------|-----------|-----------|-------------|-------------|-----------------|----------------------|-------------------------------------------------------------------------------------|------|---------------------------------|
|                                                       |          | AWG       | mm²       | Male        | Female      |                 |                      | Front                                                                               | Rear |                                 |
| #16<br>Ø0.062"<br>Longer male contact<br>(+0.039")    | Machined | 30-28     | 0.05-0.08 | RM28M1GE1K  | -           | 0.021"          | 0.043"               | -                                                                                   | Red  | K                               |
|                                                       |          | 26-24     | 0.13-0.20 | RM24M9GE1K  |             | 0.031"          | 0.062"               | Red                                                                                 | Red  |                                 |
|                                                       |          | 22-20     | 0.32-0.52 | RM20M13GE1K |             | 0.046"          | 0.070"               | Black                                                                               | Red  |                                 |
|                                                       |          |           |           | RM20M12GE1K |             |                 | 0.086"               | Blue                                                                                | Red  |                                 |
|                                                       |          | 20-16     | 0.52-1.31 | RM16M23GE1K |             | 0.070"          | 0.125"               | -                                                                                   | Red  |                                 |
|                                                       |          | 16-14     | 1.31-2.08 | RM14M30GE1K |             | 2.28            | -                    | -                                                                                   | Red  |                                 |
| #16<br>Ø0.062"<br>Shorter female contact<br>(-0.027") | Machined | 30-28     | 0.05-0.08 | -           | RC28M1GE7K  | 0.021"          | 0.043"               | -                                                                                   | Blue | K                               |
|                                                       |          | 26-24     | 0.13-0.20 |             | RC24M9GE7K  | 0.031"          | 0.062"               | Red                                                                                 | Blue |                                 |
|                                                       |          | 22-20     | 0.32-0.52 |             | RC20M13GE7K | 0.046"          | 0.070"               | Black                                                                               | Blue |                                 |
|                                                       |          |           |           |             | RC20M12GE7K |                 | 0.086"               | Blue                                                                                | Blue |                                 |
|                                                       |          | 20-16     | 0.52-1.31 |             | RC16M23GE7K | 0.070"          | 0.125"               | -                                                                                   | Blue |                                 |
|                                                       |          | 16-14     | 1.31-2.08 |             | RC14M30GE7K | 0.089"          | -                    | -                                                                                   | Blue |                                 |

### How to make FMLB / LMFB connection

| Contact 1 \ Contact 2   | Standard male contact | Standard female contact | Longer male contact |
|-------------------------|-----------------------|-------------------------|---------------------|
| Standard male contact   |                       | ✓                       |                     |
| Standard female contact | ✓                     |                         | ✓<br>FMLB           |
| Shorter female contact  | ✓<br>LMFB             |                         |                     |

First Mate Last Break contacts should be chosen only if the cavity is not marked with the ground symbol. For cavities marked with the ground symbol, standard contacts will fulfill the same role as a first mate, last break contact used in a standard cavity.



Ground symbol

## #16 Coaxial Contacts

### Coaxial Contact Range

SOURIAU provides 2 types of coaxial contacts suitable for 50 or 75Ω, coaxial cable or twisted pair cable.

#### Monocrimp coaxial contact

- The monocrimp one-piece coaxial contacts offer high reliability plus the economic advantage of a 95% reduction in installation time over conventional assembly methods.
- This economy is achieved by simultaneously crimping both the inner conductor and outer braid or drain wire.



#### Multipiece crimp coaxial contact

- The inner conductor and outer braid is crimped individually.
- The thermoplastic insulating bushing in the outer body is designed to accept and permanently retain the inner contact.
- An outer ferrule is used to connect the braid to the outer contact and provide cable support to ensure against bending and vibration.



#### Suitable for coaxial cable or twisted cable

- For jacket diameter from 0.070" to 0.120"  
Inner conductor up to 0.096" diameter



- For jacket diameter from 0.025" to 0.057"  
Inner conductor from AWG30 to AWG24



#### Contacts for coaxial cable summary

| Contact type | Contact range |                | Contact part number with cable combination | Cabling notice      |
|--------------|---------------|----------------|--------------------------------------------|---------------------|
|              | Male contact  | Female contact |                                            |                     |
| Multipiece   | RMDXK10D28    | RCDXK1D28      | See page 200                               | See pages 204 & 205 |
| Monocrimp    | RMDX60xxD28   | RCDX60xxD28    |                                            | See page 206        |

#### Contacts for twisted pairs cable summary

| Contact type | Contact range        |                     | Contact part number with cable combination | Cabling notice |
|--------------|----------------------|---------------------|--------------------------------------------|----------------|
|              | Male contact         | Female contact      |                                            |                |
| Multipiece   | RMDXK10D28 + YORK090 | RCDXK1D28 + YORK090 | See page 201                               | See page 202   |
| Monocrimp    | RMDX60xxD28          | RCDX60xxD28         |                                            | See page 203   |

# PCB Contacts

## PCB Contacts Supplied Separately - UTS Standard Series

### PCB soldering


The UTS Series can be used in a wave soldering process, but not reflow soldering process. All high temperature processes are prohibited.



| Contact size   | Part number                              |                                                                                       | Plating<br>see page 164 |
|----------------|------------------------------------------|---------------------------------------------------------------------------------------|-------------------------|
|                | Male                                     | Female                                                                                |                         |
| #20<br>Ø0.039" | RMW50A7K<br>RMW5016K                     | RCW50A7K<br>RCW5016K                                                                  | K                       |
| #16<br>Ø0.062" | RM20M12E8K<br>RM20M12E83K<br>RM20M12E84K | RC20M12E8K<br>RC20M12E83K<br>RC20M12E84K<br>RC20M12E85K<br>RC20M12E86K<br>RC20M12E87K | K                       |
| #8<br>Ø0.141"  | 82911685NPC                              | 82911684NPC                                                                           | 2 µm Ni                 |

### Nominal length G (inches)

Dimension of dipsolder contacts out of connector (contacts to be ordered separately).



#### UTS0 with PCB contacts #16

| Connector size | Pin contact |              |              | Socket contact |              |              |              |
|----------------|-------------|--------------|--------------|----------------|--------------|--------------|--------------|
|                | RM20M12E8K* | RM20M12E83K* | RM20M12E84K* | RC20M12E8K*    | RC20M12E83K* | RC20M12E84K* | RC20M12E87K* |
| 10             | 0.165"      | 0.370"       | 0.507"       | 0.165"         | 0.370"       | 0.507"       | 0.255"       |
| 12             | 0.141"      | 0.346"       | 0.484"       | 0.165"         | 0.370"       | 0.507"       | 0.255"       |
| 14             | 0.129"      | 0.334"       | 0.472"       | 0.102"         | 0.307"       | 0.444"       | 0.192"       |
| 18             | 0.165"      | 0.366"       | 0.507"       | 0.165"         | 0.370"       | 0.507"       | 0.255"       |

#### UTS7 with PCB contacts #20 and #16

| Connector size | Pin contact  |              |           |           | Socket contact |           |           |
|----------------|--------------|--------------|-----------|-----------|----------------|-----------|-----------|
|                | RM20M12E83K* | RM20M12E84K* | RMW50A7K* | RMW5016K* | RC20M12E84K*   | RCW50A7K* | RCW5016K* |
| 10             | 0.287"       | 0.425"       | 0.330"    | 0.366"    | 0.141"         | 0.330"    | 0.366"    |
| 12             | 0.287"       | 0.425"       | 0.330"    | 0.366"    | 0.153"         | 0.330"    | 0.366"    |
| 14             | 0.287"       | 0.425"       | 0.330"    | 0.366"    | 0.141"         | -         | -         |
| 18             | 0.318"       | 0.456"       | 0.330"    | 0.366"    | 0.141"         | -         | -         |

#### UTS7 with PCB contacts #16 and #8

| Connector type | Pin contact  |              | Socket contact |              |
|----------------|--------------|--------------|----------------|--------------|
|                | RM20M12E83K* | 82911685NPC* | RC20M12E87K*   | 82911684NPC* |
| UTS7142G1P     | -            | 0.251"       | -              | -            |
| UTS7142G1S     | -            | -            | -              | 0.322"       |
| UTS7142G1SNPT  | -            | 0.228"       | -              | 0.212"       |
| UTS718X2M3     | 0.192"       | 0.177"       | 0.114"         | 0.204"       |
| UTS7183G1SNPT  | -            | -            | -              | 0.164"       |

\* Plating indication see page 164

Note: all dimensions are in inches




## PCB Contacts Loaded - UTS Sealed Unmated Series

### PCB soldering

The UTS Series can be used in a wave soldering process, but not reflow soldering process. All high temperature processes are prohibited.

### Nominal length G (inches)

Dimension of dipsolder contacts out of connector (contacts to be ordered separately).

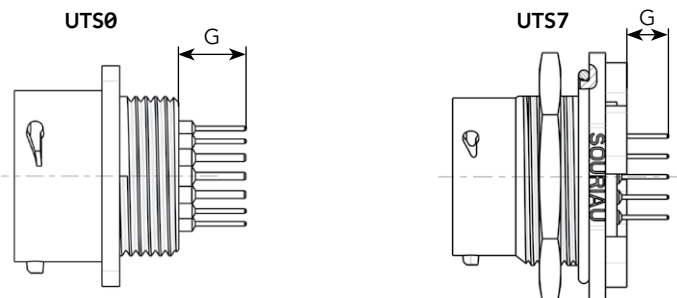

#### UTS0

| Connector size | Connector Part Number                 | Pin contact |        | Socket contact |        |
|----------------|---------------------------------------|-------------|--------|----------------|--------|
|                |                                       | G mini      | G maxi | G mini         | G maxi |
| 8              | 8D2 - 8D3<br>8D4                      | 0.283"      | 0.362" | 0.275"         | 0.354" |
|                | 8D3A/8D98<br>8D33                     | 0.318"      | 0.409" | 0.318"         | 0.397" |
| 10             | 10D6 - 10D98<br>10D7                  | 0.318"      | 0.401" | 0.318"         | 0.405" |
| 12             | 12D2 - 12D3<br>12D8 - 12D10           | 0.318"      | 0.401" | 0.318"         | 0.405" |
|                | 12D4                                  | 0.322"      | 0.393" | 0.318"         | 0.405" |
|                | 12D14                                 | 0.283"      | 0.354" | 0.279"         | 0.362" |
| 14             | 14D5 - 14D12 - 14D15<br>14D18 - 14D19 | 0.318"      | 0.401" | 0.318"         | 0.405" |
|                | 14D7                                  | 0.322"      | 0.393" | 0.318"         | 0.405" |

#### UTS7

| Connector size | Connector Part Number                 | Pin contact |        | Socket contact |        |
|----------------|---------------------------------------|-------------|--------|----------------|--------|
|                |                                       | G mini      | G maxi | G mini         | G maxi |
| 8              | 8D2 - 8D3<br>8D4                      | 0.149"      | 0.240" | 0.145"         | 0.232" |
|                | 8D3A/8D98<br>8D33                     | 0.185"      | 0.287" | 0.185"         | 0.275" |
| 10             | 10D6 - 10D98<br>10D7                  | 0.185"      | 0.287" | 0.185"         | 0.275" |
| 12             | 12D2 - 12D3<br>12D8 - 12D10           | 0.185"      | 0.287" | 0.185"         | 0.275" |
|                | 12D4                                  | 0.192"      | 0.279" | 0.185"         | 0.275" |
|                | 12D14                                 | 0.149"      | 0.232" | 0.149"         | 0.232" |
| 14             | 14D5 - 14D12 - 14D15<br>14D18 - 14D19 | 0.188"      | 0.287" | 0.192"         | 0.275" |
|                | 14D7                                  | 0.192"      | 0.279" | 0.192"         | 0.275" |

Note: all dimensions are in inches

## Fiber Optic Contacts

## Description

## Size 16 fiber optic contacts for UTS and other TRIM TRIO® connectors

Size 16 fiber optic contacts are designed for the integration of optical links in UTS and other TRIM TRIO® cable connectors.

**The Fiber optic contacts are designed to accommodate:**

- Plastic Optical Fiber (POF) 0.039" core and 0.086" jacket

**Typical features and benefits are:**

- Socket contact is spring loaded to avoid any air gap between the two optical faces.
- Low insertion loss is provided by high precision pieces.
- Single jumpers, multiway harness and active device housings can be supplied regarding customer requirement.



## Technical Characteristics

## Performance

- Fiber type: ..... POF
- Wave length: ..... 650 nm
- Optical insertion loss (typ.): ..... 2 dB max.
- Jacketed external diameter: ..... 0.086"
- Temperature range: ..... -25°C to +70°C
- Cable retention: ..... 49N
- Mating cycles without cleaning: ..... 50
- Max. mating cycles: ..... 500

## Construction

- Contact body: Copper alloy

## Connector accommodation

Any TRIM TRIO® size 16 contact can be used in any contact position in any connector in the TRIM TRIO® size 16 interconnection system:  
UTP, UTS, UTG, UTO, UTL.

## Ordering Information

### POF Contacts (Plastic Optical Fiber)

Male contact ..... RMPOF1000

Female contact ..... RCPOF1000B

## POF Contact (Plastic Optical Fiber)

### STANDARD TOOLING KIT - P/N 80MS0004

The *standard tooling kit* is made of the part numbers below that can be ordered separately as well.

| Part numbers | Descriptions                                                   |
|--------------|----------------------------------------------------------------|
| 80WD0005     | Stripping tool                                                 |
| 80WD0025     | Automatic stripping tool for Ø 0.019", 0.023", 0.027" & 0.149" |
| 80WM0006     | Ruler                                                          |
| 80WP0005     | Polishing plate                                                |
| 80WP0013     | Non slip base (to hold the polishing plate)                    |
| 80WP0014     | Polishing disk (grain size 9µm)                                |
| 80WP0018     | Polishing tool                                                 |
| 80WP0019     | Polishing disk (grain size 30µm)                               |
| 80WS0002     | Crimping plier                                                 |

### SPECIFIC TOOLING LIST - Can only be ordered separately

| Part numbers | Descriptions   |
|--------------|----------------|
| 80WG0010     | Needle         |
| 80WG0015     | Capsule        |
| 80WG0016     | Syringe        |
| 80WN0005     | Dry air spray  |
| 80WN0006     | Optical paper  |
| 80WN0012     | Dropper bottle |
| 80WN0008     | Wiping solvent |

# UTS SERIES

# Technical Information

|                                           |     |
|-------------------------------------------|-----|
| ■ Tooling .....                           | 174 |
| ■ Stripping & Crimping Instructions ..... | 176 |
| ■ Handle & Interchangeable Heads .....    | 178 |
| ■ Insertion & Extraction Tools .....      | 179 |
| ■ Overmolded Harnesses Dimensions .....   | 179 |
| ■ Assembly Instructions .....             | 180 |
| ■ Mated Connector Lengths .....           | 184 |
| ■ Mating Procedure .....                  | 185 |
| ■ Rated Current & Working Voltage .....   | 186 |
| ■ UV Resistance .....                     | 187 |
| ■ UL94 + UL1977 .....                     | 188 |
| ■ IEC 61984 & IP Codes Explained .....    | 191 |
| ■ IEC 61140 Explained .....               | 193 |
| ■ What is NEMA Rating ? .....             | 194 |
| ■ Ethernet for the Layman .....           | 195 |

## Automatic Crimping Tools



# SOURIAU


**Mecal is a leader in manufacturing tooling for crimping terminals over a stripped wire.**

Established in 1976, Mecal has become one of the world's leading companies dedicated to the design and manufacture of semi automatic production tools for strip fed, open barrel crimp terminals, serving the Automotive, Telecom and Datacom industries.


**The extreme environment interconnect specialist "from deep sea to deep space".**

SOURIAU designs, manufactures and markets high performance interconnect solutions for severe environments dedicated to the aerospace, defense, light and heavy industry markets.

**SOURIAU has been working in partnership with Mecal for many years. With sales offices located in all major industrial regions of the world, the combined strengths of both organizations has resulted in a truly global solution to all your production tooling needs.**

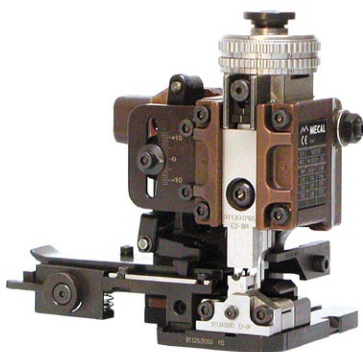

Mini Applicator

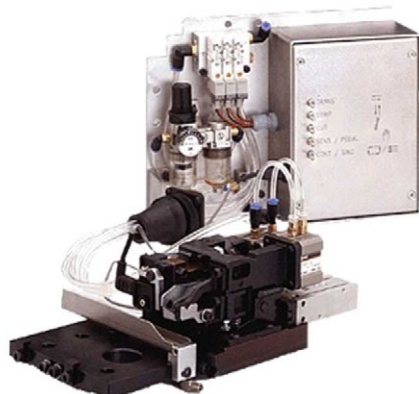

Stripper



Presses

Mecal sales network:

<http://www.mecalbystarn.com/>

# Tooling

## Crimp Tool Table

### Standard contacts

| Contact size                 | Part number                  | Head*    | Handles* | Extraction tools |
|------------------------------|------------------------------|----------|----------|------------------|
| #20<br>Ø0.039"               | RM/RC 24W3K                  | S20RCM   | SHANGLES | RX20D44          |
|                              | RM/RC 20W3K                  |          |          |                  |
|                              | RM/RC 18W3K                  |          |          |                  |
|                              | SM 24WL3S* <sup>(1)</sup>    | S20SCM20 |          |                  |
|                              | SC 24WL3S* <sup>(1)</sup>    |          |          |                  |
|                              | SM/SC 20WL3S* <sup>(1)</sup> |          |          |                  |
| #16<br>Ø0.062"               | RM/RC 28M1*                  | S16RCM20 |          |                  |
|                              | RM/RC 24M9*                  |          |          |                  |
|                              | RM/RC 20M13*                 |          |          |                  |
|                              | RM/RC 20M12*                 |          |          |                  |
|                              | RM/RC 16M23*                 | S16RCM16 |          |                  |
|                              | RM/RC 14M30*                 | S16RCM14 |          |                  |
|                              | SM/SC 24ML1* <sup>(1)</sup>  | S16SCM20 |          |                  |
|                              | SM/SC 20ML1* <sup>(1)</sup>  |          |          |                  |
|                              | SM/SC 16ML1* <sup>(1)</sup>  | S16SCML1 |          |                  |
|                              | SM/SC 14ML1* <sup>(1)</sup>  |          |          |                  |
| SM/SC 16ML11* <sup>(1)</sup> | S16SCML11                    |          |          |                  |

(1) loose contact

\* endurance of SHANGLES &amp; Head tools = 50,000 cycles

| Contact size   | Part number            | Tool with separate locator |                              |     | Extraction tools |
|----------------|------------------------|----------------------------|------------------------------|-----|------------------|
|                |                        | Hand tool                  | Positioner + locator setting |     |                  |
| #12<br>Ø0.094" | 82911457N* / 82911456* | M317                       | VGE10077A                    | 1-2 | 51060210924      |
|                | 82911459N* / 82911458* |                            |                              | 2   |                  |
|                | 82911461N* / 82911460* |                            |                              | 2   |                  |
|                | 82911463N* / 82911462* |                            |                              | 3   |                  |
|                | 82911465N* / 82911464* |                            |                              | 3   |                  |
|                | 82911467N* / 82911466* |                            |                              | 4   |                  |
| #8<br>Ø0.141"  | 82913601A / 82913600A  | M317                       | VGE10078A                    | 3   | 51060210936      |
|                | 82913603A / 82913602A  |                            |                              | 3   |                  |
|                | 82913605A / 82913604A  |                            |                              | 4   |                  |
|                | 82913607A / 82913606A  |                            |                              | 5   |                  |
|                | 82913609A / 82913608A  |                            |                              | 6/7 |                  |

\* see page 165 for plating options and other contact details

### Specific contacts (First mate Last break contacts)

| Contact size                            | Part number*               | Hand tools<br>(SHANDLES) head | Tool with separate locator |                              |     | Extraction tools |
|-----------------------------------------|----------------------------|-------------------------------|----------------------------|------------------------------|-----|------------------|
|                                         |                            |                               | Hand tool                  | Positioner + locator setting |     |                  |
| #16<br>Ø0.062"<br>Longer RM<br>contact  | RM28M1GE1K                 | S16RCM20                      | -                          | -                            | -   | RX2025GE1        |
|                                         | RM24M9GE1K                 |                               |                            |                              |     |                  |
|                                         | RM20M13GE1K                |                               |                            |                              |     |                  |
|                                         | RM16M23GE1K<br>RM20M12GE1K | S16RCM16                      | MH860                      | MH86186                      | 6/8 |                  |
|                                         | RM14M30GE1K                | S16RCM14                      | -                          | -                            | -   |                  |
| #16<br>Ø0.062"<br>Shorter RC<br>contact | RC28M1GE7K                 | S16RCM20                      | MH860                      | MH86164G                     | 4/6 |                  |
|                                         | RC24M9GE7K                 |                               |                            |                              | 5/6 |                  |
|                                         | RC20M13GE7K<br>RC20M12GE7K |                               |                            |                              | 5/7 |                  |
|                                         | RC16M23GE7K                | S16RCM16                      |                            | 6/8                          |     |                  |
|                                         | RC14M30GE7K                | S16RCM14                      | M317                       | UH25                         | 3   |                  |

\* see page 164 for plating options and other contact details

### Coaxial contacts

See coax contacts details on page 167 and cabling notice pages 202 to 206.



# Stripping & Crimping Instructions

## Wire Stripping Crimp Version

|                                                                                                                                                     | Part number                                                             |                                                                         | Stripping length L (inches) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------|
|                                                                                                                                                     | Male                                                                    | Female                                                                  |                             |
| <b>Machined contact</b><br>                                        | #20 (Ø0.039")                                                           |                                                                         |                             |
|                                                                                                                                                     | RM24W3- / RM20W3-<br>RM18W3-                                            | RC24W3- / RC20W3-<br>RC18W3-                                            | 0.188"                      |
|                                                                                                                                                     | #16 (Ø0.062")                                                           |                                                                         |                             |
|                                                                                                                                                     | RM28M1- / RM24M9-<br>RM20M13- / RM20M12-                                | RC28M1- / RC24M9-<br>RC20M13- / RC20M12-                                | 0.188"                      |
|                                                                                                                                                     | RM16M23- / RM14M30-                                                     | RC16M23- / RC14M30-                                                     | 0.279"                      |
| <b>Stamped &amp; Formed</b><br><b>With insulation support</b><br> | #16 (Ø0.062")                                                           |                                                                         |                             |
|                                                                                                                                                     | SM24M1- / SM24ML1-<br>SM20M1- / SM20ML1-                                | SC24M1- / SC24ML1-<br>SC20M1- / SC20ML1-                                | 0.157"                      |
|                                                                                                                                                     | SM16M11- / SM16ML11-                                                    | SC16M11- / SC16ML11-                                                    | 0.183"                      |
|                                                                                                                                                     | #20 (Ø0.039")                                                           |                                                                         |                             |
|                                                                                                                                                     | SM24W3- / SM24WL3-<br>SM20W3- / SM20WL3-                                | SC24W3- / SC24WL3-<br>SC20W3- / SC20WL3-                                | 0.157"                      |
| <b>Without insulation support</b><br>                            | #16 (Ø0.062")                                                           |                                                                         |                             |
|                                                                                                                                                     | SM16M1- / SM16ML1-                                                      | SC16M1- / SC16ML1-                                                      | 0.250"                      |
|                                                                                                                                                     | SM14M1- / SM14ML1-                                                      | SC14M1- / SC14ML1-                                                      | 0.250"                      |
| <b>Power Contacts Machined</b><br>                               | #12 (Ø0.094")                                                           |                                                                         |                             |
|                                                                                                                                                     | 82911457- / 82911459-<br>82911461- / 82911463-<br>82911465- / 82911467- | 82911456- / 82911458-<br>82911460- / 82911462-<br>82911464- / 82911466- | 0.275" to 0.314"            |
|                                                                                                                                                     | #8 (Ø0.141")                                                            |                                                                         |                             |
|                                                                  | 82913601- / 82913603-<br>82913605- / 82913607-<br>82913609-             | 82913600- / 82913602-<br>82913604- / 82913606-<br>82913608-             | 0.255" to 0.295"            |

Note: See page 165 for plating options and other contact details

## Wire Stripping Solder and Screw Versions

|                                                                                                                                       |                               | Stripping length L |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------------|
| <b>Solder contact delivered with connector</b><br> | #16 (Ø0.062") & #20 (Ø0.039") |                    |
|                                                                                                                                       |                               | 0.196"             |
| <b>Screw contact delivered with connector</b><br>  | #16 (Ø0.062")                 |                    |
|                                                                                                                                       |                               | 0.228"             |

Note: all dimensions are in inches

## Crimping


One of the key factors which affects the performance of a connector is the way contacts are terminated. Crimped connections are nowadays seen as the best solution to ensure quality throughout the lifetime of the product. Here are some reasons why we recommend this method of termination for UTS connectors:

### Advantages (Extract from the IEC 60352-2):

- Efficient processing of connections at each production level
- Processing by fully-automatic or semi-automatic crimping machines, or with hand operated tools
- No cold-soldered joints
- No degradation of the spring characteristic of female contacts by the soldering temperature

- No health risk from heavy metal and flux steam
- Preservation of conductor flexibility behind the crimped connection
- No burnt, discolored and overheated wire insulation
- Good connections with reproducible electrical and mechanical performances
- Easy production control.

To ensure that the crimp tooling is performing according to original specifications, it is important to carry out regular checks. A common way to check the performance of tooling is with a simple pull test, ideally using a dedicated electric pull tester. Minimum recommended pull forces are indicated in the tables below:

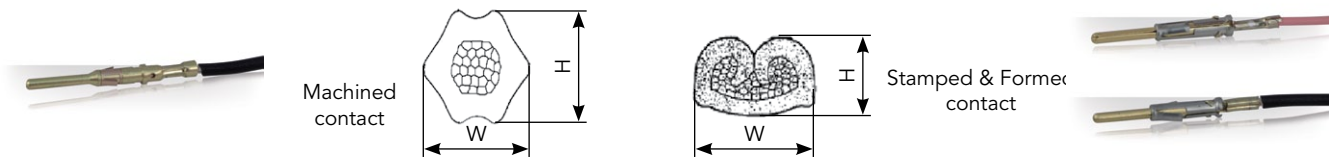

| Active contact part                | Contact type                                     | Die location on heads | Wire section range | Section (inches <sup>2</sup> ) | Tensile straight test (mini) | Height (inches) H (±0.002") | Width (inches) W (±0.002") | Tooling head p/n |
|------------------------------------|--------------------------------------------------|-----------------------|--------------------|--------------------------------|------------------------------|-----------------------------|----------------------------|------------------|
| Machined contacts size #20 Ø0.039" | RM24W3K<br>RC24W3K                               | 26/24                 | AWG 26             | 0.004" min                     | 15 N                         | 0.037"                      | 0.050"                     | S20RCM           |
|                                    |                                                  |                       | AWG 24             | 0.009" max                     | 32 N                         |                             |                            |                  |
|                                    | RM20W3K<br>RC20W3K                               | 22/20                 | AWG 22             | 0.012" min                     | 40 N                         | 0.049"                      | 0.070"                     |                  |
|                                    |                                                  |                       | AWG 20             | 0.019" max                     | 60 N                         |                             |                            |                  |
|                                    | RM18W3K<br>RC18W3K                               | 20/18                 | AWG 20             | 0.019" max                     | 60 N                         | 0.053"                      | 0.073"                     |                  |
|                                    |                                                  |                       | AWG 18             | 0.032" max                     | 90 N                         |                             |                            |                  |
| S & F contacts size #20 Ø0.039"    | SM24WL3TK6*<br>SC24WL3TK6*                       | 26/24                 | AWG 26             | 0.004" min                     | 15 N                         | 0.031"                      | 0.058"                     | S20SCM20         |
|                                    |                                                  |                       | AWG 24             | 0.009" max                     | 32 N                         |                             |                            |                  |
|                                    | SM20WL3TK6*<br>SC20WL3TK6*                       | 22/20                 | AWG 22             | 0.012" min                     | 40 N                         | 0.039"                      | 0.060"                     |                  |
|                                    |                                                  |                       | AWG 20             | 0.019" max                     | 60 N                         |                             |                            |                  |
| Machined contacts size #16 Ø0.062" | RM28M1K*<br>RC28M1K*                             | 30/28                 | AWG 30             | 0.001" min                     | 11 N                         | 0.044"                      | 0.055"                     | S16RCM20         |
|                                    |                                                  |                       | AWG 28             | 0.08 max                       | 11 N                         |                             |                            |                  |
|                                    | RM24M9K*<br>RC24M9K*                             | 26/24                 | AWG 26             | 0.004" min                     | 15 N                         | 0.045"                      | 0.055"                     |                  |
|                                    |                                                  |                       | AWG 24             | 0.009" max                     | 32 N                         |                             |                            |                  |
|                                    | RM20M13K*<br>RC20M13K*<br>RM20M12K*<br>RC20M12K* | 22/20                 | AWG 22             | 0.012" min                     | 40 N                         | 0.049"                      | 0.069"                     |                  |
|                                    |                                                  |                       | AWG 20             | 0.019" max                     | 60 N                         |                             |                            |                  |
|                                    |                                                  |                       | AWG 22             | 0.012" min                     | 40 N                         |                             |                            |                  |
|                                    |                                                  |                       | AWG 20             | 0.019" max                     | 60 N                         |                             |                            |                  |
|                                    | RM16M23K*<br>RC16M23K*                           | 20                    | AWG 20             | 0.019" max                     | 60 N                         | 0.065"                      | 0.085"                     | S16RCM16         |
|                                    |                                                  | 18                    | AWG 18             | 0.032" max                     | 90 N                         | 0.070"                      | 0.089"                     |                  |
|                                    |                                                  | 16                    | AWG 16             | 0.059" max                     | 150 N                        | 0.077"                      | 0.095"                     |                  |
|                                    | RM14M30K*<br>RC14M30K*                           | 16                    | AWG 16             | 0.059" min                     | 150 N                        | 0.082"                      | 0.105"                     | S16RCM14         |
|                                    |                                                  | 14                    | AWG 14             | 0.098" min                     | 230 N                        | 0.090"                      | 0.109"                     |                  |
| S & F contacts size #16 Ø0.062"    | SM24ML1TK6*<br>SC24ML1TK6*                       | 26/24                 | AWG 26             | 0.004" min                     | 15 N                         | 0.033"                      | 0.059"                     | S16SCM20         |
|                                    |                                                  |                       | AWG 24             | 0.009" max                     | 32 N                         |                             |                            |                  |
|                                    | SM20ML1TK6*<br>SC20ML1TK6*                       | 22/20                 | AWG 22             | 0.012" min                     | 40 N                         | 0.040"                      | 0.060"                     |                  |
|                                    |                                                  |                       | AWG 20             | 0.019" max                     | 60 N                         |                             |                            |                  |
|                                    | SM16ML11TK6*<br>SC16ML11TK6*                     | 18                    | AWG 18             | 0.032" min                     | 90 N                         | 0.051"                      | 0.082"                     | S16SCML11        |
|                                    |                                                  | 16                    | AWG 16             | 0.059" max                     | 150 N                        | 0.053"                      | 0.082"                     |                  |
|                                    | SM16ML1TK6*<br>SC16ML1TK6*                       | 18                    | AWG 18             | 0.032" min                     | 90 N                         | 0.058"                      | 0.079"                     | S16SCML1         |
|                                    |                                                  | 16                    | AWG 16             | 0.059" max                     | 150 N                        | 0.066"                      | 0.080"                     |                  |
|                                    | SM14ML1TK6*<br>SC14ML1TK6*                       | 14                    | AWG 14             | 0.098" max                     | 230 N                        | 0.070"                      | 0.1001"                    |                  |

\* example of plating options, for other plating see page 164


## Handle & Interchangeable Heads

### User Guide

- 1) Fully close then release the tool, keep it open.  
Open the 2 pins.




- 2) Choose the adapter head (sold separately), keep vertical and slide it into the handle until the mechanical end.

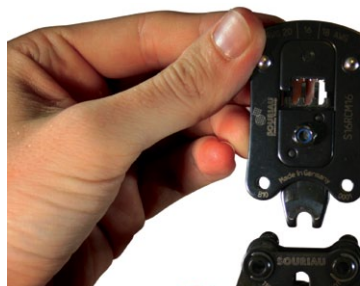

- 3) Close the two pins simultaneously to maintain the head.



- 4) Strip the cable properly check the recommended size in the catalog on page 180.

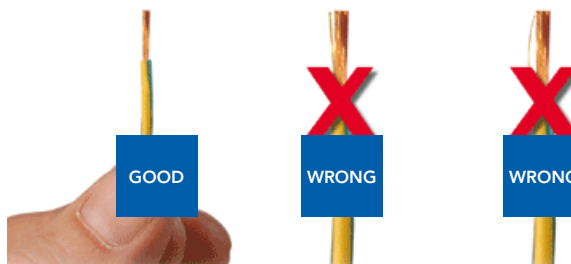

- 5) Place conductors, with no deteriorations, in the bucket contact.  
All strands to be located in the crimp bucket.




- 6) Position the contact in the bottom of the tool by checking its orientation.



- 7) To crimp contact assembly-cable, tighten sharply the clip to the end of the mechanism (maxi 175N).



- 8) To control crimp quality, slightly pull cable with two fingers to control retention.

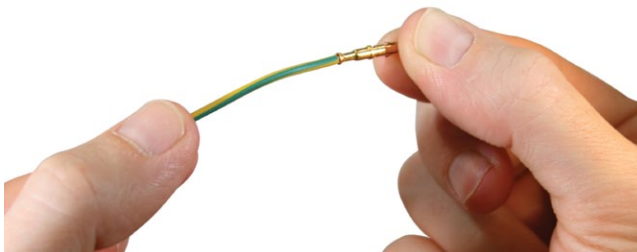

## Insertion & Extraction Tools

| Contact size   | Insertion tool |
|----------------|----------------|
| #20<br>Ø0.039" | RTM205         |
| #16<br>Ø0.062" | RTM205         |

| Contact size   | Extraction tools |
|----------------|------------------|
| #20<br>Ø0.039" | RX20D44          |
| #16<br>Ø0.062" | RX2025GE1        |
| #12<br>Ø0.094" | 51060210924      |
| #8<br>Ø0.141"  | 51060210936      |




## Contact extraction instruction

Place the tool into the cavity from front face of the connector, push on the handle, then remove the contact.



## Overmolded Cable Assembly Dimensions

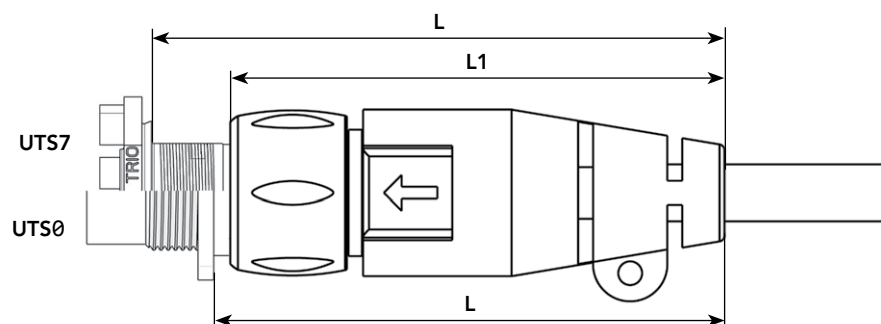

| Shell size | UTS0  |        | UTS7  |        |
|------------|-------|--------|-------|--------|
|            | L max | L1 max | L max | L1 max |
| 10         | 3.44" | 3.2"   | 3.67" | 3.2"   |
| 12         | 3.55" | 3.3"   | 3.79" | 3.3"   |
| 14         | 3.85" | 3.6"   | 4.08" | 3.6"   |


Note: all dimensions are in inches

# Assembly Instructions



## UTS0 Assembly (Mounting Suggestion)

- Strip wires, crimp or solder contacts (see pages 176 & 177)
- Insert contacts into connector cavities (insert manually or use tool RTM205 crimp contacts)
- Place receptacle in the panel cut-out
- Secure receptacle with screws (not supplied)  
Tighten screws: M2.5 (recommended torque: see table below)
- For complete sealing of the system use optional gasket and sealed screw solution (not sold by SOURIAU).


### Front mounting: Crimp version

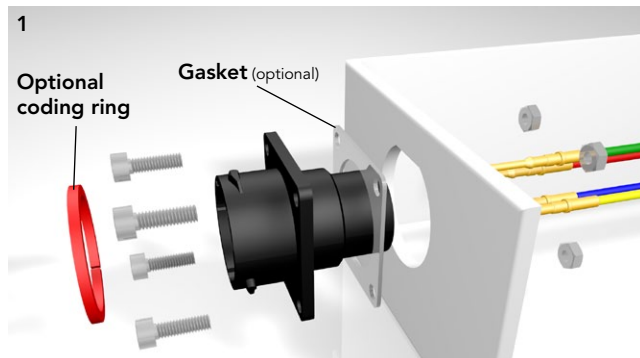



### Front mounting: Solder version

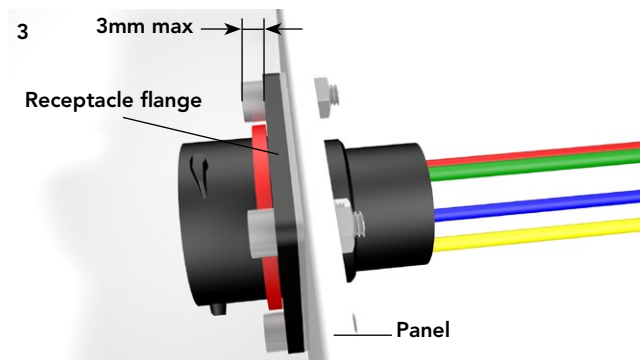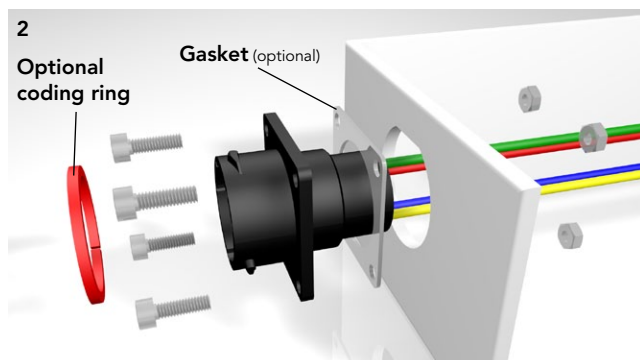

### Rear mounting: Crimp version

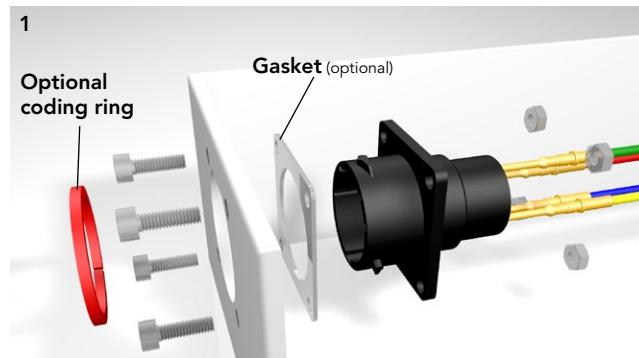

### Rear mounting: Solder version

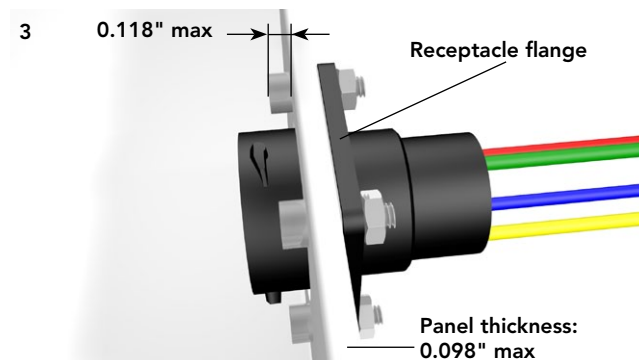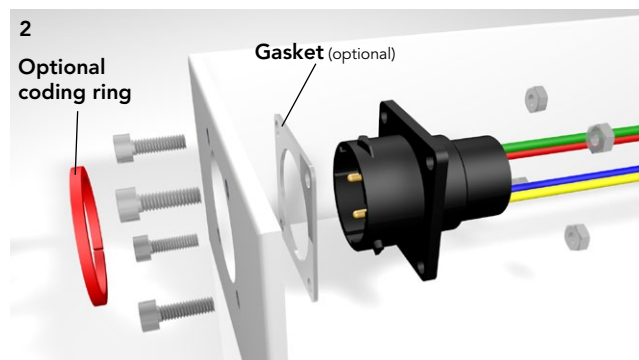

|                              | Shell size |           |           |           |           |
|------------------------------|------------|-----------|-----------|-----------|-----------|
|                              | 8          | 10        | 12        | 14        | 18        |
| Screw tightening torque (Nm) | 0.30/0.40  | 0.30/0.40 | 0.30/0.40 | 0.30/0.40 | 0.35/0.45 |





### UTS7 Assembly (Mounting Suggestion)

- Strip wires and crimp contacts (see pages 176 & 177)
- Insert contacts into connector cavities (insert manually or use tool RTM205 crimp contacts )
- Seat o-ring, place receptacle in the panel cut-out
- Tighten jam nut

| Shell size | Jam nut torque (Nm) maxi | Exterior jam nut dim. (inches) | Ø Wire           |                       |
|------------|--------------------------|--------------------------------|------------------|-----------------------|
|            |                          |                                | Standard version | Discrete wire sealing |
| 8          | 1.5                      | 0.748"                         | 0.125" max.      | From 0.066" to 0.118" |
| 10         | 3                        | 0.874"                         |                  |                       |
| 12         | 4                        | 1.063"                         |                  |                       |
| 14         | 5                        | 1.185"                         |                  |                       |
| 18         | 5                        | 1.437"                         |                  |                       |

#### Threaded receptacle


| Shell size | Jam nut torque (Nm) maxi | Threading | P mini (mm) |
|------------|--------------------------|-----------|-------------|
| 8          | 2.5                      | M12 x 1.5 | 0.303"      |
| 10         | 3.75                     | M16 x 1.5 | 0.303"      |
| 12         | 3.75                     | M20 x 1.5 | 0.409"      |
| 14         | 4.18                     | 1/2"      | 0.326"      |
| 18         | 4.76                     | 3/4"      | 0.456"      |

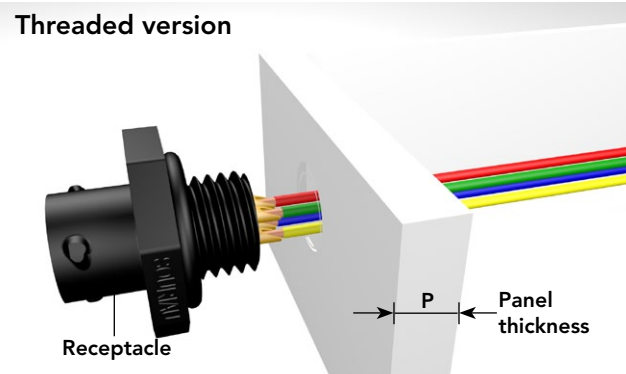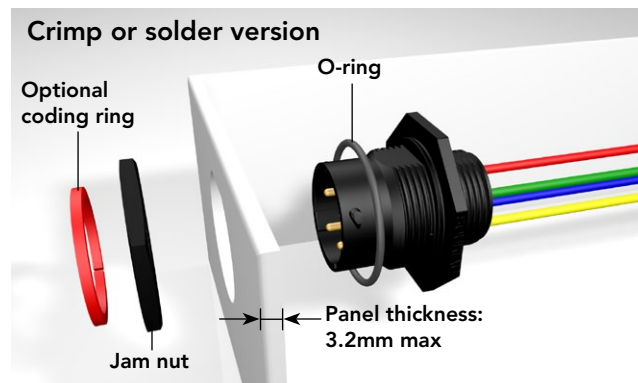

### UTS6 or UTS7 with GN Backshell Assembly

- Strip wires and crimp contacts (see pages 176 & 177)
- Insert first contact into the grommet (first contact in cavity A, no tool is required). Then insert the contact in the connector cavity A (insert manually or use tool RTM205)
- Insert the other contacts
- Tighten the nut to rear of either UTS6 or UTS7 (recommended torque values to be applied according to the table below).


| Shell size | layout | Nut tightening torque (Nm) | Ø Wire                |
|------------|--------|----------------------------|-----------------------|
| 10         | 4      | 1                          | From 0.066" to 0.118" |
| 12         | 8      | 1.5                        |                       |
| 14         | 7      | 1.5                        |                       |
| 14         | 12     | 1.5                        |                       |

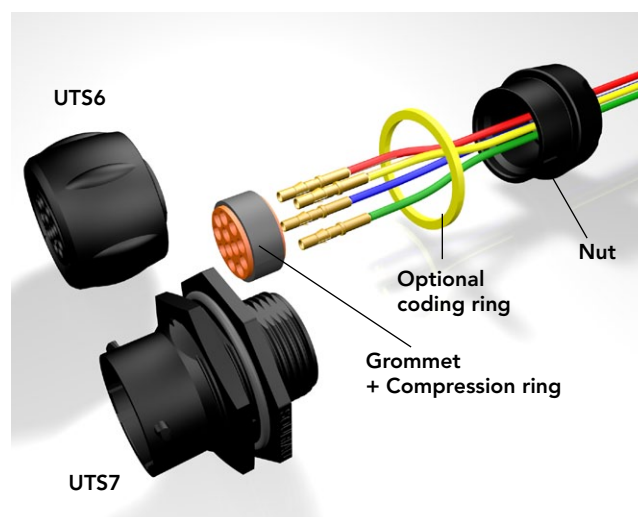

## Assembly Instructions (Continued)


### UTS1JC or UTS6JC Assembly: Crimp Version

- Slide accessories onto the cable

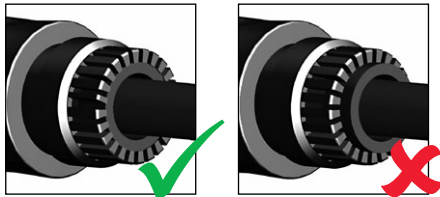

Make sure the seal is positioned as shown.


- Mate the plug with a corresponding counter part
- Strip external cable jacket
- Strip wires and crimp contacts (see pages 176 & 177)
- Insert contacts into connector cavities (insert manually or use tool RTM205)
- Tighten adapter with plug UTS6 or receptacle UTS1, choose right seal (waste the other seal)
- Tighten the nut to rear of either UTS1 or UTS6 (recommended torque values to be applied according table to the right)
- Caution: only one of both delivered gasket should be used !

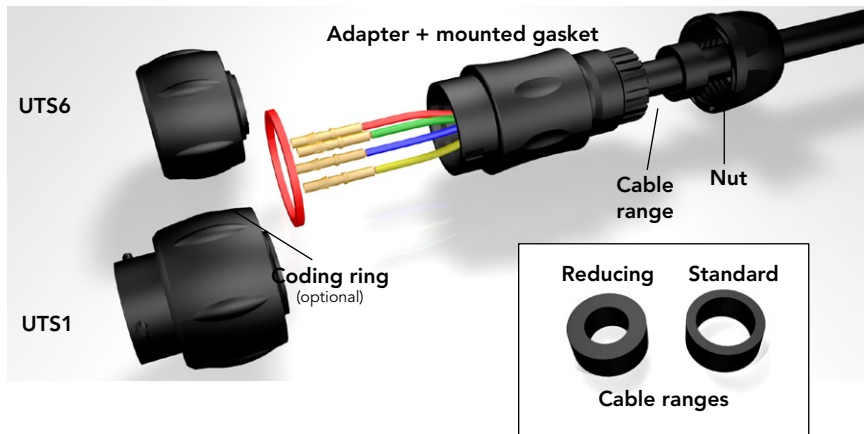

| Shell size | Recommended jacket strip length (inches) |        | Adapter tightening torque (Nm) | Nut tightening torque (Nm) | Ø Cable range Standard seal (inches) | Ø Cable range Reducing seal (inches) | Ø Wire (inches)       |
|------------|------------------------------------------|--------|--------------------------------|----------------------------|--------------------------------------|--------------------------------------|-----------------------|
|            | Male                                     | Female |                                |                            |                                      |                                      |                       |
| 10         | 0.826"                                   | 1.141" | 1.5                            | 1                          | 0.098"/0.0314"                       | 0.059"/0.196"                        | From 0.066" to 0.118" |
| 12         | 0.984"                                   | 1.299" | 2                              | 2.5                        | 0.196"/0.472"                        | 0.118"/0.354"                        |                       |
| 14         | 1.141"                                   | 1.417" | 3                              | 2.5                        | 0.275"/0.551"                        | 0.196"/0.472"                        |                       |
| 18         | 1.456"                                   | 1.771" | 4                              | 3.5                        | 0.354"/0.708"                        | 0.275"/0.629"                        |                       |


### UTS6JC Assembly: Solder Version

- Slide accessories onto the cable

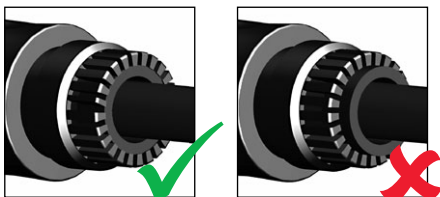

Make sure the seal is positioned as shown.

- Mate the plug with a corresponding receptacle
- Strip external cable jacket
- Strip wires and crimp contacts (see pages 176 & 177)
- Insert contacts into connector cavities (insert manually or use tool RTM205)
- Tighten adapter with plug, choose right seal (waste the other seal)
- Tighten the nut to rear of either UTS6 (recommended torque values to be applied according table to the right)
- Caution: only one of both delivered gasket should be used !

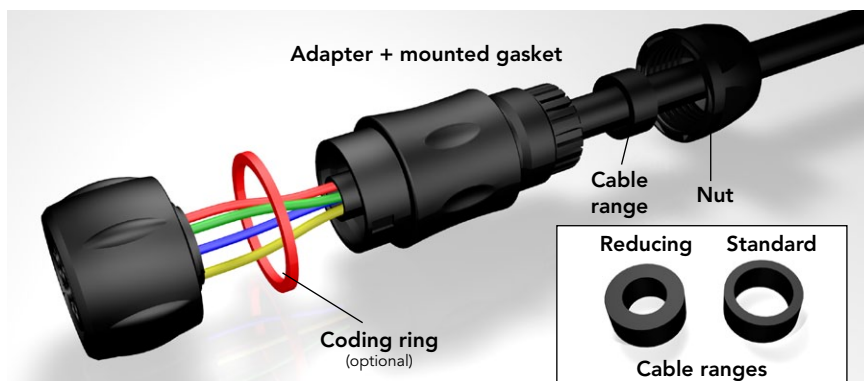


| Shell size | Recommended jacket strip length (inches) | Adapter tightening torque (Nm) | Nut tightening torque (Nm) | Ø Cable range Standard seal (inches) | Ø Cable range Reducing seal (inches) | Ø Wire (inches)       |
|------------|------------------------------------------|--------------------------------|----------------------------|--------------------------------------|--------------------------------------|-----------------------|
|            | Male                                     |                                |                            |                                      |                                      |                       |
| 8          | 0.669"                                   | 1                              | 0.75                       | 0.098"/0.255"                        | 1.5/0.196"                           | From 0.066" to 0.118" |
| 10         | 0.826"                                   | 1.5                            | 1                          | 0.098"/0.314"                        | 1.5/0.196"                           |                       |
| 12         | 0.984"                                   | 2                              | 2.5                        | 0.196"/0.472"                        | 0.118"/0.354"                        |                       |
| 14         | 1.141"                                   | 3                              | 2.5                        | 0.275"/0.551"                        | 0.196"/0.472"                        |                       |

Note: all dimensions are in inches




## UTS6JC Screw Termination Assembly

- Mate the plug with a corresponding receptacle equipped with its contacts
- Choose and place right seal depending on cable diameter (see table below)

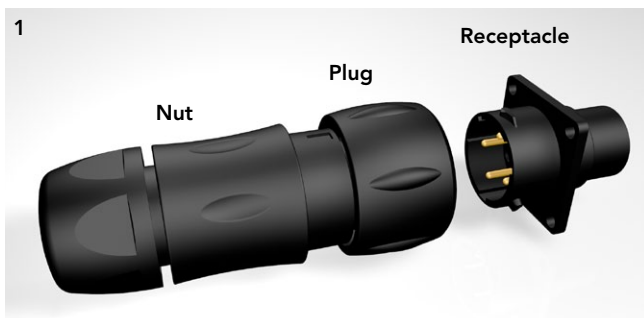


- Strip the wires (strip length 0.228")

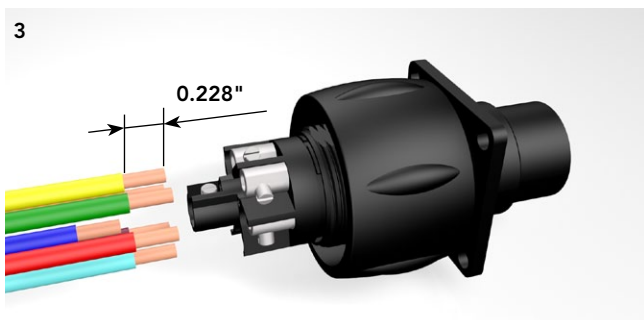


- Check the mechanical cable retention, by gently pulling the cable with 2 fingers
- Tighten adapter with the plug (recommended torque: see table)



- Slide accessories on the cable
- Strip external jacket (see table below).

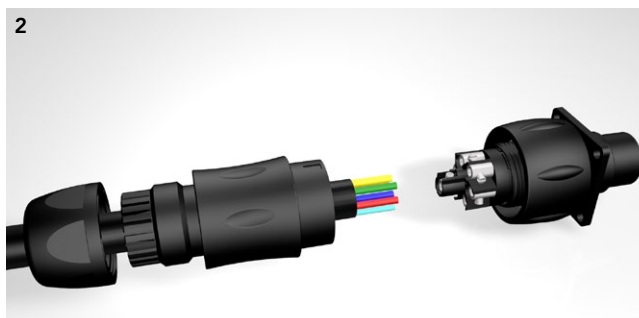

- Place the conductors in the contact barrel. Make sure all conductor strands are inside the barrel
- Tight the contact screws, advised torque 20 Ncm

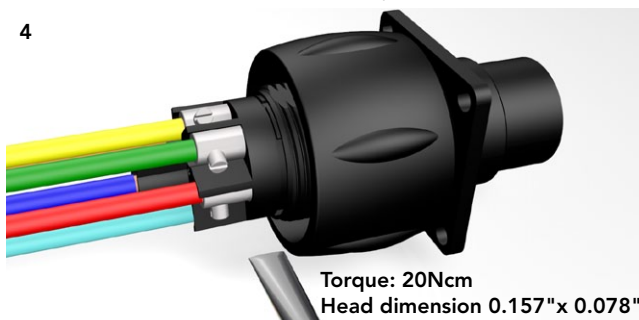

- Tighten backshell nut with adapter (recommended torque: see table below) (cables should not turn into the backshell during this operation).




| Shell size | Recommended jacket strip length (inches) |            | Adapter tightening torque (Nm) | Nut tightening torque (Nm) | Ø Cable range Standard seal (inches) | Ø Cable range Reducing seal (inches) | Ø Wire (inches)       |
|------------|------------------------------------------|------------|--------------------------------|----------------------------|--------------------------------------|--------------------------------------|-----------------------|
|            | Male                                     | Female     |                                |                            |                                      |                                      |                       |
| 12         | 0.897" max                               | 0.594" max | 2                              | 2.5                        | 0.196"/0.472"                        | 0.118"/0.354"                        | From 0.066" to 0.118" |
| 14         | 1.051" max                               | 0.74" max  | 3                              | 2.5                        | 0.275"/0.551"                        | 0.196"/0.472"                        |                       |

Note: all dimensions are in inches

## Assembly Instructions (Continued)



### UTS1GJC or UTS6GJC Assembly

- Slide accessories onto the cable (make sure to keep compression ring on the grommet)
- Strip external cable jacket
- Strip wires and crimp contacts (see pages 176 & 177)
- Insert first contact into the grommet (first contact in cavity A, no tool is required). Then insert the contact in the connector cavity A (insert manually or use tool RTM205)
- Place the grommet and compression ring on the insulator
- Insert the other contacts
- Tighten adapter with plug UTS6 or receptacle UTS1, choose right seal (waste the other seal)
- Tighten the nut to rear of either UTS1 or UTS6 (recommended torque values to be applied according to the table right).

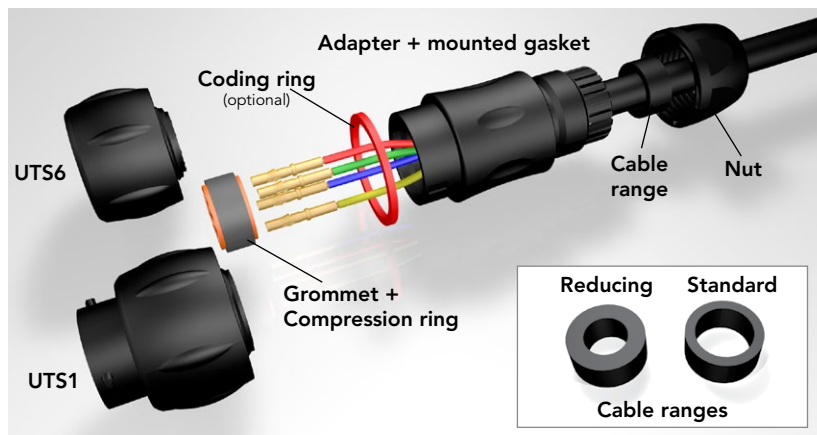

| Shell size | Recommended jacket strip length (inches) |        | Adapter tightening torque (Nm) | Nut tightening torque (Nm) | Ø Cable range Standard seal (inches) | Ø Cable range Reducing seal (inches) | Ø Wire (inches)       |
|------------|------------------------------------------|--------|--------------------------------|----------------------------|--------------------------------------|--------------------------------------|-----------------------|
|            | Male                                     | Female |                                |                            |                                      |                                      |                       |
| 10         | 0.826"                                   | 1.141" | 1.5                            | 2                          | 0.098"/0.80                          | 0.059"/0.196"                        | From 0.066" to 0.118" |
| 12         | 0.984"                                   | 1.299" | 2                              | 2.5                        | 0.196"/0.472"                        | 0.118"/0.354"                        |                       |
| 14         | 1.141"                                   | 1.417" | 3                              | 2.5                        | 0.275"/0.551"                        | 0.196"/0.472"                        |                       |

### Mated Connector Lengths

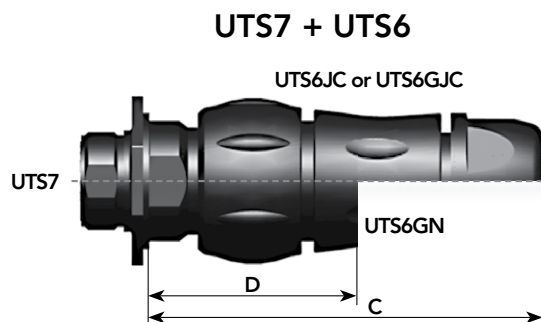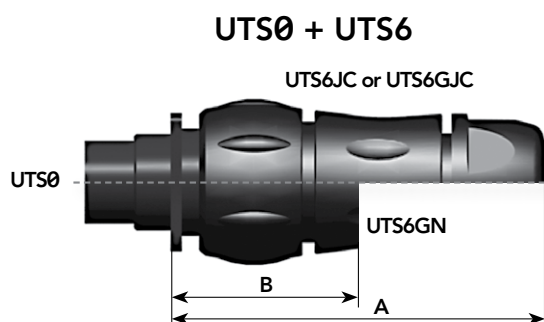

| Shell size | UTS0 + UTS6GJC or UTS6GJC | UTS0 + UTS6GN | UTS7 + UTS6GJC or UTS6GJC | UTS7 + UTS6GN |
|------------|---------------------------|---------------|---------------------------|---------------|
|            | A max                     | B max         | C max                     | D max         |
| 8          | 2.405"                    | -             | 3.622"                    | -             |
| 10         | 2.881"                    | 1.559"        | 3.043"                    | 1.720"        |
| 12         | 3.055"                    | 1.551"        | 3.216"                    | 1.712"        |
| 14         | 3.287"                    | 1.574"        | 3.448"                    | 1.736"        |
| 18         | 3.665"                    | -             | 3.826"                    | -             |

Note: all dimensions are in inches

## Mating Procedure


### UTS Coupling Procedure

The pictures below provide step by step instructions on how to mate a plug and receptacle connector in order to avoid damaging any of the contacts.

- Identify the primary key of each connector.




- Align the primary keys of the connectors.

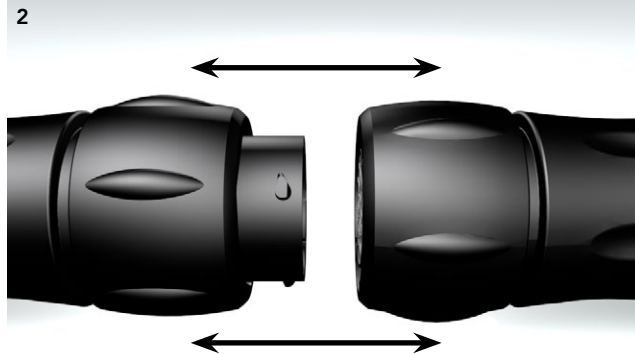


- Incorrect positioning:



- Offer the plug to the receptacle.

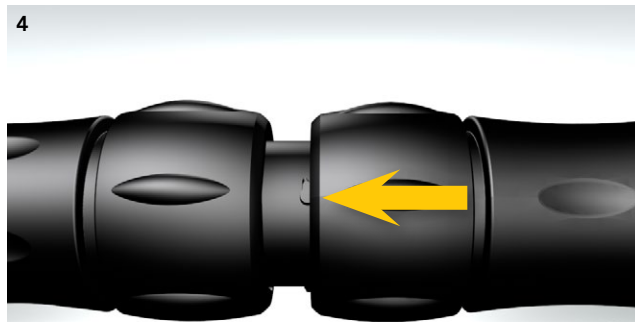

- Turn coupling ring until you hear a 'click'

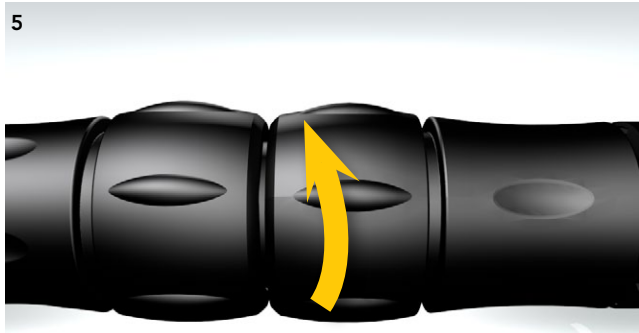

- If the cable is free, a mechanical stress can appear on the plug and receptacle, at the end you can have a break of the plug or receptacle if there is a high vibration level.



Example of installation

## Rated Current & Working Voltage

### Current Carrying Capacity

The current carrying capacity of a connector is limited by the thermal properties of materials used in its construction. The amount of current that can be handled depends on the size of cable used, the ambient temperature and the heat that is generated inside the connector. Part 3 of the IEC 60512 standard determines through a derating curve, the maximum current permissible, which varies from one layout to another (Fig.1 & Fig.2). Wire size plays an important role in dissipating heat and avoid overheating (Fig.1 & Fig.3).

Please note that the curve should be adjusted when dealing with potential hot spots, which can occur as a result of unequal loading of current across a number of contacts. As a general rule, it is best to avoid placing power handling contacts in the middle of the connector; try to locate them towards the edge where heat can be dissipated more effectively. Eventually you should find a level which represents the permissible operating range:

Fig.1: UTS 12-4 – 1.5mm<sup>2</sup> wires

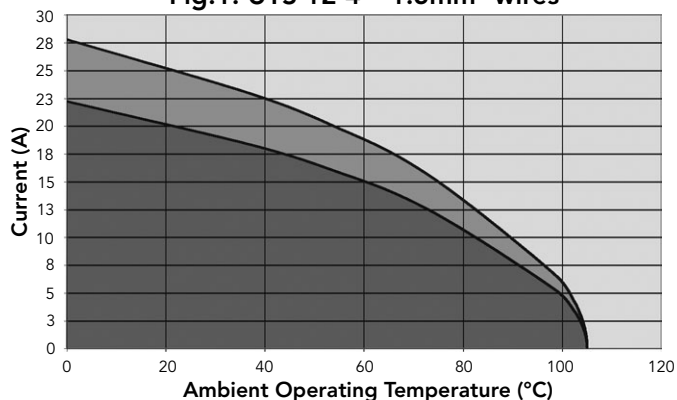


Fig.2: UTS 12-8 – 1.5mm<sup>2</sup> wires



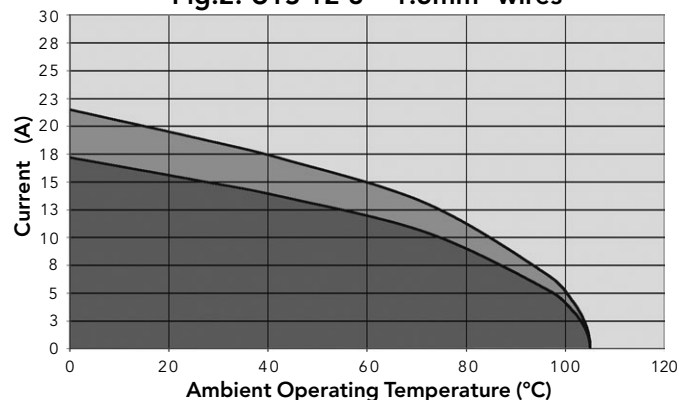


Fig.3: UTS 12-4 – 2.5mm<sup>2</sup> wires

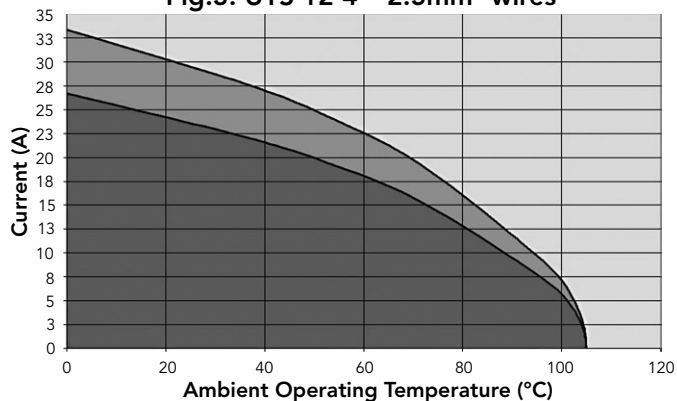

The **rated current** is defined as uninterrupted continuous current that a connector can take when all contacts are energized simultaneously without exceeding the maximum limit of temperature. The earth contact is never loaded.

## UV Resistance

### Exposure in Natural Environment

Solar radiation affects all materials, but plastics can be susceptible to extreme degradation over time. The choice of materials for the UTS series was therefore a critical consideration.


All over the world we are not exposed to the same amount of energy given by the sun. The chart shown here clearly illustrates this.

So we performed test according to the ISO 4892-2 and simulated 5 years exposure to outdoor environments (temperature, humidity, etc.).

After this period there was no significant colour variation, no crazing, no cracking and no major variation of mechanical properties.

In addition, we asked UL to perform UV test per the UL746C. Our material has been rated F1 which is the highest level in this standard.

Yearly mean of daily irradiation in UV (280-400 nm)  
on horizontal plane (J/cm<sup>2</sup>) (1990-2004)

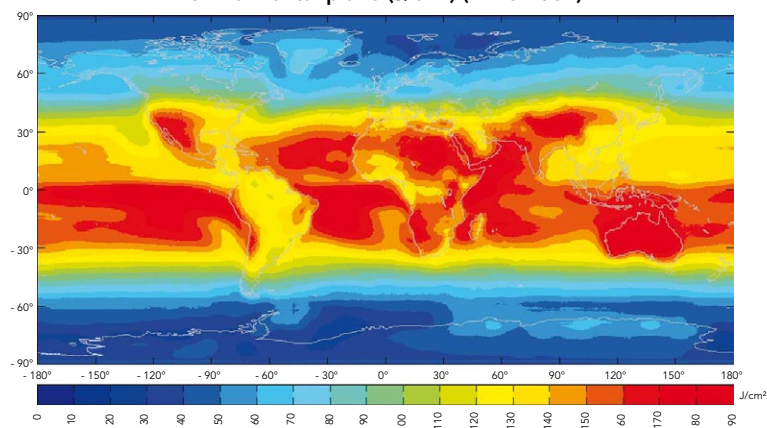

## UL94 + UL1977

Underwriter Laboratories



There are two main standards for industrial connectors: UL94 & UL1977

### UL94


This standard is dedicated to plastics flammability. It characterises how the material burns in various orientation and thicknesses.

The UTS series has been rated at **V-0 for UTS sealed mated & HB for UTS sealed unmated.**

Procedure: A specimen is supported in a vertical or horizontal position and a flame is applied to the bottom of the specimen. The flame is applied for ten seconds and then removed until flaming stops, at which time the flame is reapplied for another ten seconds and then removed. Two sets of five specimens are tested.


#### V-0 Vertical burning:

- Specimens must not burn with flaming combustion for more than 10 seconds after each test flame application
- Total flaming combustion time must not exceed 50 seconds for each set of 5 specimens
- Specimens must not burn with flaming or glowing combustion up to the specimen holding clamp
- Specimens must not drip flaming particles that ignite the cotton
- No specimen can have glowing combustion remain for longer than 30 seconds after removal of the test flame.

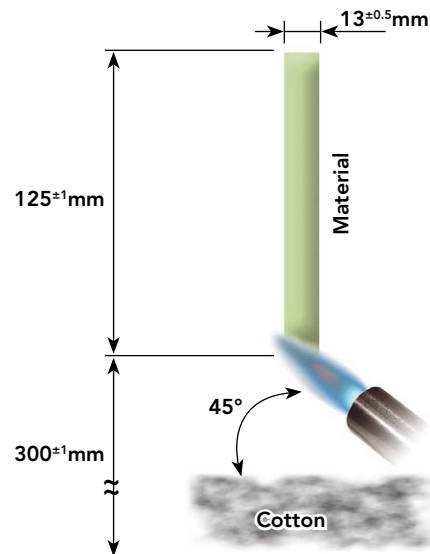

#### HB Horizontal burning:

- A material classified HB shall not have a burning rate exceeding 40 mm per minute over a 75 mm span for specimens having a thickness of 3.0 to 13 mm
- A material classified HB shall not have a burning rate exceeding 75 mm per minute over a 75 mm span for specimens having a thickness less than 3.0 mm
- A material classified HB shall cease to burn before the 100 mm reference mark.

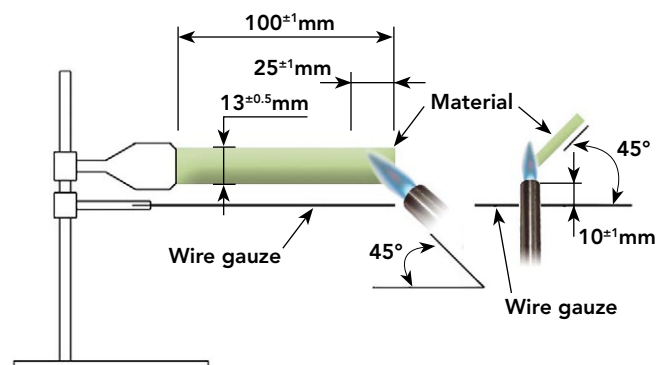

## UL1977

There are several standards which deal with plug and receptacle. Each of them is only for a small area of applications. It could be telecommunication, etc. The UL 1977 covers single and multipole connectors intended for factory assembly.

Requirements apply to devices taking into account intensity and voltage. The categories are as follows:

|        | 0       | 30 V<br>(42 V peak) | 600 V   |
|--------|---------|---------------------|---------|
| 0      | Type 0  |                     | Type 1A |
| 31 A   | Type 1B |                     | Type 2  |
|        |         |                     | Type 3  |
| 1000 A | Type 4  |                     |         |

According to above table, the level of performance that has to be reached could be different. Most of them are explained in the following page.

## Insulating materials:

Material uses for electrical insulation, as a minimum, have to comply with the characteristics shown below:

### • Minimum ratings for polymeric materials

| Type | Flame rating | Relative thermal index (RTI)<br>Electrical/mechanical w/o impact */** |
|------|--------------|-----------------------------------------------------------------------|
| 0    | -            | 50/50                                                                 |
| 1A   | HB           | 50/50                                                                 |
| 1B   | HB           | 50/50                                                                 |
| 2    | HB           | 50/50                                                                 |
| 3    | HB           | 50/50                                                                 |
| 4    | HB           | 50/50                                                                 |

\* The RTI of the material shall not be lower than the temperature measured during the Temperature Test.

\*\* For a thickness less than that for which a value has been established, the RTI of the minimum thickness with an established value shall be used.

## Assembly:

Connector has to be keyed to prevent any mismatching that can damage the machine or hurt the user. In the same way, plugs and sockets have to be equipped to protect persons against contact with live parts.

Finally the identified grounding contact shall be located so that the corresponding electrical continuity has to be completed before any other contact.



## UL94 + UL1977 (Continued)

Underwriter Laboratories  US

## UL1977

## Spacing:

For a 250V max connector, distance through air or over material shall be 1.2mm whereas from 250V to 600V connector the spacing is 3.2mm minimum. These distances have to be taken between uninsulated live parts as shown in the matrix below:

## • Applicability of spacing requirements

| Type | Uninsulated live part - uninsulated live part of opposite polarity | Uninsulated live part - uninsulated grounded metal part | Uninsulated live part - exposed dead metal part |
|------|--------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------|
| 0    | No                                                                 | No                                                      | No                                              |
| 1A   | Yes                                                                | Yes                                                     | Yes                                             |
| 1B   | Yes                                                                | Yes                                                     | No                                              |
| 2    | Yes                                                                | Yes                                                     | Yes                                             |
| 3    | Yes                                                                | Yes                                                     | Yes                                             |
| 4    | Yes                                                                | Yes                                                     | Yes                                             |

An alternative way to determine voltage rating is with the Dielectric-Withstand test. If during one minute there is no arc-over or breakdown the rated voltage is given as shown below:

- a) 500 volts for a type 1B device
- b) 1000 volts plus twice rated voltage for types 1A, 2, 3 and 4 devices.

## Marking:

A device shall be legibly marked with the manufacturer's trade name, trade mark, or other descriptive marking by which the organization responsible for the product may be identified. (Exception: If the device is too small, or where the legibility would be difficult to attain, the manufacturer's name, trademark, or other descriptive marking may appear on the smallest unit container or carton)

The following shall be marked on the device or on the smallest unit container or carton or on a stuffer sheet in the smallest unit container or carton:

- a) The catalog number or an equivalent designation
- b) The electrical rating in both volts and amperes, if assigned
- c) Whether ac or dc, if restricted
- d) Flammability class, if identified

Example - Marking for the arrangement 10-3:

10A 500V UL94 V-0

## IEC 61984 & IP Codes Explained

### IEC 61984

The norm is dedicated to connectors with rated voltage above 50V and up to 1000V and rated currents up to 125A per contact. Depending on your application connectors should be compliant with another standard. This has to be double checked with the customer.


There are a lot of constructional requirements and performances specified in that standard. Most of them are illustrated in greater details hereafter.

### Provisions for earthing:

The UTS connector is intended to be used on Class I or Class III (see IEC 61140) systems. Even if the purpose of our connector is not to interrupt current, there is a need to add a protective earth contact. This one shall be a "First mate, last break" style. Critically, among all of the normal assumptions we make in designing a connector, this contact has to be considered as a live part and must be protected attached to the ground wire.

### IP Code:

IP is a coding system defined by the IEC 60529 to indicate the degrees of protection provided by an enclosure. The aim of this is to give information regarding the accessibility of live parts against ingress of water and other foreign bodies.

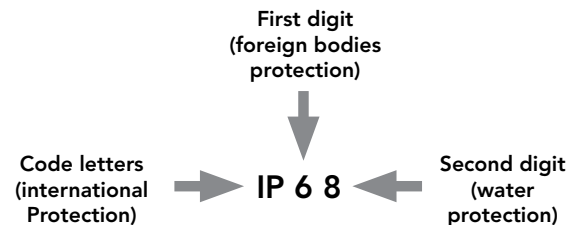

| 1 <sup>st</sup> digit | Degree of protection                                                                                                                                                | 2 <sup>nd</sup> digit | Degree of protection                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------|
| 0                     | No protection against accidental contact.<br>No protection against solid foreign bodies.                                                                            | 0                     | No protection against water.                                                   |
| 1                     | Protection against contact with any large area by hand and against large solid foreign bodies with a diameter bigger than 50 mm.                                    | 1                     | Drip-proof.<br>Protection against vertical water drips.                        |
| 2                     | Protection against contact with the fingers.<br>Protection against solid foreign bodies with a diameter bigger than 12 mm.                                          | 2                     | Drip-proof.<br>Protection against water drips up to a 15° angle.               |
| 3                     | Protection against tools, wires or similar objects with a diameter bigger than 2.5 mm.<br>Protection against small solid bodies with a diameter bigger than 2.5 mm. | 3                     | Spray-proof.<br>Protection against diagonal water drips up to a 60° angle.     |
| 4                     | Same as 3 however diameter is bigger than 1 mm.                                                                                                                     | 4                     | Splash-proof.<br>Protection against splashed water from all directions.        |
| 5                     | Full protection against contact. Protection against interior injurious dust deposits.                                                                               | 5                     | Hose-proof.<br>Protection against water (out of a nozzle) from all directions. |
| 6                     | Total protection against contact.<br>Protection against penetration of dust.                                                                                        | 6                     | Protection against temporary flooding.                                         |
|                       |                                                                                                                                                                     | 7                     | Protection against temporary immersions.                                       |
|                       |                                                                                                                                                                     | 8                     | Protection against water pressure.<br>Pressure to be specified by supplier.    |

UTS offers high sealing performance IP68 / 69K...  
Even in dynamic situations.

In addition to the IEC 60529 we conjointly use the DIN 40050 part 9 which are dedicated to road vehicles. The main differences are:

- **First digit:** 5 replaced by 5K, 6 by 6K. In the DIN the tested equipment is not depressurized as it is in the IEC.
- **Second digit:** 5K and 6K has been added and are equivalent respectively to 5 and 6 but with higher pressure. 9K which represents the High pressure cleaning.

|    |                                                                                                            |
|----|------------------------------------------------------------------------------------------------------------|
| 9K | High pressure hose-proof.<br>Protection against high pressure water (out of a nozzle) from all directions. |
|----|------------------------------------------------------------------------------------------------------------|

## IEC 61984 & IP Codes Explained (Continued)

### IEC 61984

#### Overvoltage

UTS connectors are qualified to be used on systems rated at Overvoltage category III

Per the IEC 60664-1 (formerly VDE 0110) each category is linked to the end application and where the device will be implemented:

- **Category IV** (primary overcurrent protection equipment):  
Origin of the installation
- **Category III** (any fixed installation with a permanent connection)  
Fixed installation and equipment and for cases where the reliability and the availability is subject to special requirements
- **Category II** (domestic appliances):  
Energy consuming equipment to be supplied from the fixed installation
- **Category I** (protected electronic circuit):  
For connection to circuit in which measures are taken to limit transient overvoltage.

#### Pollution degree

Per the IEC 60664-1 (formerly VDE 0110) the environment affects the performance of the insulation. Particles can build a bridge between two metal parts. As a rule dust mixed with water can be conductive and more generally speaking metal dust is conductive. Finally, the standard defines 4 levels of pollution:

- **Degree 1** (Air conditioned dry room):  
No pollution or only dry, non conductive pollution occurs. The pollution has no influence.
- **Degree 2** (Personal computer in a residential area):  
Only non conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.
- **Degree 3** (Machine tools):  
Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.
- **Degree 4** (Equipments on roof, locomotives):  
Continuous conductivity occurs due to conductive dust, rain or other wet conditions.

Finally, the harsher the environment is, the longer clearance and creepage distances should be. Nonetheless, according the IEC 61984, enclosure rated at IP54 or higher can be dimensioned for a lower pollution degree. This applies to mated connectors disengaged for test and maintenance.

#### Marking

The marking should give enough details to the user to know what the main characteristics are and without going deep in technical documentation. Below examples identify the suitability of the connector:

- **Example 1:**  
Marking of a connector with rated current 16A, rated voltage 400V, rated impulse voltage 6kV and pollution degree 3, 2 and 1 for use in any system, preferably unearthed or delta-earthed systems:

**16A 400V 6kV 3**

- **Example 2:**  
Marking of a connector with rated current 16A, rated insulation voltages line-to-earth 250V, line-to-line 400V, rated impulse voltage 4kV and pollution degree 3, 2 and 1 for use in earthed systems:

**16A 250V 400V 4kV 3**

## IEC 61140 Explained

### IEC 61140

On a daily basis, we are using many electrical appliances, some are grounded, and some are not. The levels of grounding protection are clearly defined by the International Electrotechnical Commission standard IEC 61140, a standard that has an influence on our connectors and how they should be used; our customers therefore need to pay particular attention to the three categories defined within this standard to ensure compatibility with their system. Everything explained hereafter is valid for connectors not intended to interrupt current.

#### Class I:

Devices which belong to this category have their chassis grounded via the ground wire (green/yellow in Europe, green in the US, Canada and Japan). A fault in the appliance might cause a live conductor to energize the casing. In this case, the current flows to the ground conductor and the circuit interrupter will cut off the power supply. In case of the UTS series, it means the envelope (coupling ring, backshell and housing) may become live, therefore, care needs to be taken to attach the connector to the ground. This is usually done via the ground conductor using a splice between the ground contact and the housing.

#### Class II:

Products in this category have reinforced insulation, meaning that the casing does not need to be connected to ground. In this case, the possibility of electric shock has been removed. Most of the time, reinforced insulation means double insulation, i.e. the second layer will take over the first one in case the first one fails. The UTS series is not designed to comply with this standard, so we cannot recommend it for this product category.

Note: UL 1310 also defines a class II device, but in that case this is just to set the upper limit of use, like a wall charger for our cell phone.

#### Class III:

In this category, electrical appliances are fed by a low voltage source (<48VAC or < 120VDC). In normal conditions live conductors can be accessible without any risk for the end user. No particular attention needs to be taken in regards to UTS series when it comes to a class III device.

### Conclusion:

UTS series can be used in class I and class III environments, but each category affects the product performance. Throughout the catalog, current and voltage ratings have been given for class I devices keeping in mind the ground conductor needs to be attached according to recommended wiring instructions.

Note: Special applications like recreational vehicles are not under the scope of the IEC 61140.

## What is NEMA Rating ?

- NEMA ratings vs IP ratings

Whereas IP ratings only consider protection against ingress of foreign bodies (first digit) and ingress of water (second digit), NEMA ratings consider these but also verify protection from external ice, corrosive materials, oil immersion, etc.

The correlation between NEMA & IP being limited only to dust and water, we can state that a NEMA type is equivalent to an IP rating but it is not possible to say the contrary.

Below a list of some NEMA standards:

| Enclosure rating | IP20 | IP22 | IP55 | IP64 | IP65 | IP66 | IP67 | IP68 |
|------------------|------|------|------|------|------|------|------|------|
| Type 1           | •    |      |      |      |      |      |      |      |
| Type 3           |      |      |      | •    |      |      |      |      |
| Type 3R          |      | •    |      |      |      |      |      |      |
| Type 3S          |      |      |      | •    |      |      |      |      |
| Type 4           |      |      |      |      |      | •    |      |      |
| Type 4X          |      |      |      |      |      | •    |      |      |
| Type 6           |      |      |      |      |      |      | •    |      |
| Type 6P          |      |      |      |      |      |      |      | •    |
| Type 12          |      |      | •    |      |      |      |      |      |
| Type 13          |      |      |      |      | •    |      |      |      |

• indicates compliance


Type 6 rating can be either Type 6 or Type 6P - please see below:



|    |      |                                                                                                                                                                                                                                                                                                                               |
|----|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6  | IP67 | Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment, falling dirt, hose-directed water, the entry of water during <b>occasional temporary</b> submersion at a limited depth and damage from external ice formation. |
| 6P | IP68 | Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment, falling dirt, hose-directed water, the entry of water <b>during prolonged</b> submersion at a limited depth and damage from external ice formation.            |

## Ethernet for the Layman

In order to explain basic Ethernet theory, we can use a functional comparison to a busy city with highways, buildings and cars. To illustrate this, the table below provides correlation between the different components/pieces/links that encompass Ethernet network connectivity, and the larger scale infrastructure of a metropolitan city.

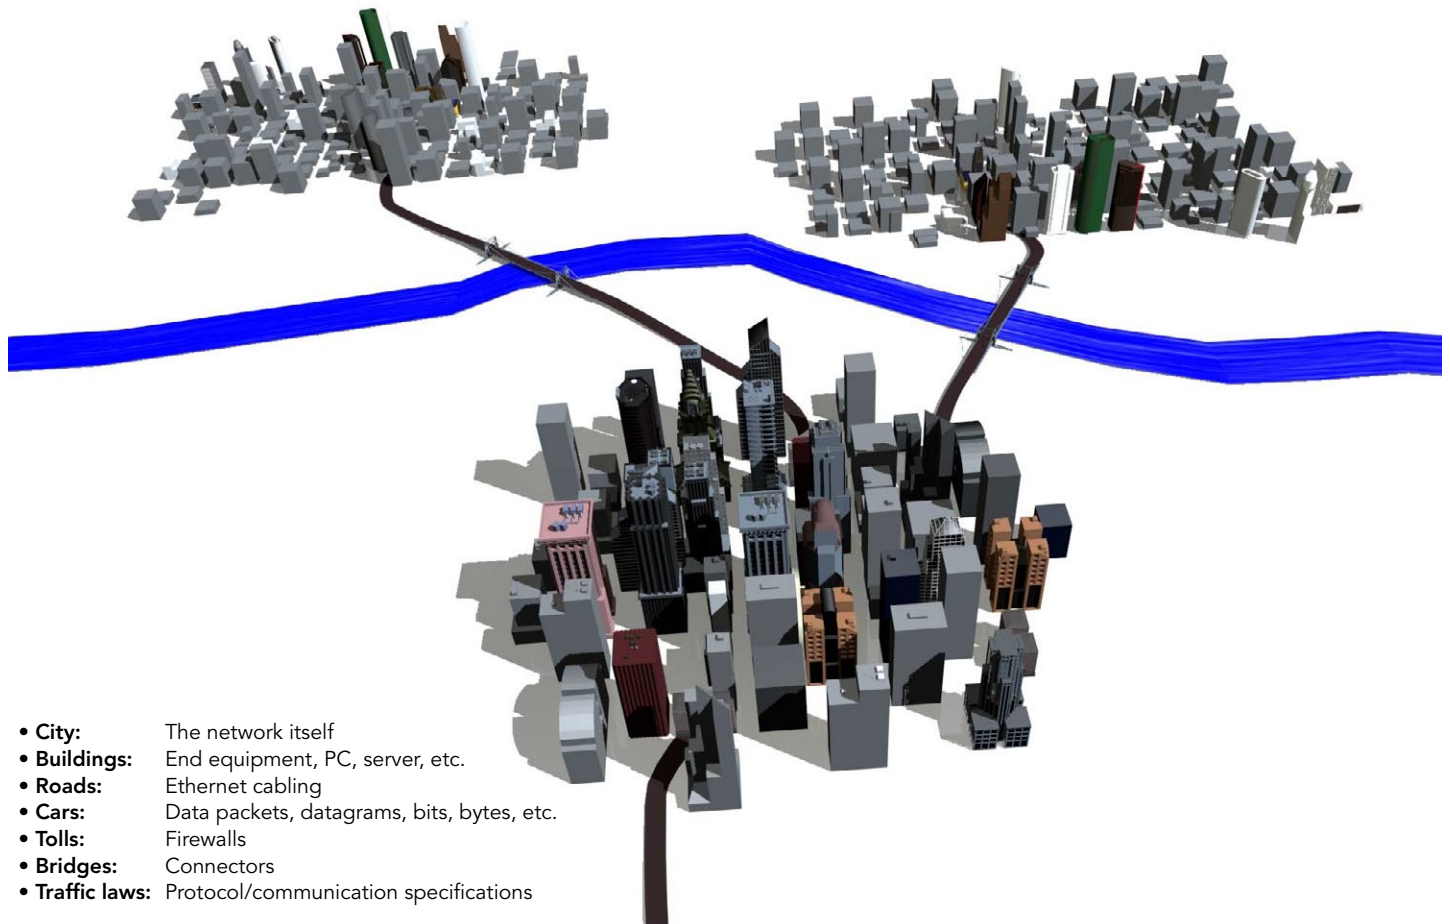

- **City:** The network itself
- **Buildings:** End equipment, PC, server, etc.
- **Roads:** Ethernet cabling
- **Cars:** Data packets, datagrams, bits, bytes, etc.
- **Tolls:** Firewalls
- **Bridges:** Connectors
- **Traffic laws:** Protocol/communication specifications

## Ethernet Basics

Ethernet is a widely used communications protocol that is used to transmit data packets (datagrams) between network devices. Imagine a highway in a large metropolitan area six lanes wide at rush hour. The vehicles on the highway need rules to follow so that they get to their destination without crashing into each other. In an Ethernet network link, there could be 100 million bits of information transmitted in one second. In the Ethernet standard, there exist rules to govern packet structure, transmission requirements, error correction, communication with end equipment, etc.

## Examining the differences between 100Mhz, 100 Base TX, Cat5e/Cat6. What does it all mean?

When discussing connectors and Ethernet, there are a few key details to be aware of:




- 100Mhz is a measurement of Frequency for the signal
  - Comparable to the Speed Limit of a highway
- 100BaseTX (or Fast Ethernet) is an Ethernet link standard and identifies available link bandwidth. The bandwidth is measured in units of Mbits/S (megabits per second)
  - Comparable to the number of cars that pass a point in one second
- Cat5e/Cat6 are an EIA/TIA standard for performance and physical characteristics for cables and connectors
  - Comparable to performance specifications of the car and highway.

In connectors and cables, Fast Ethernet uses 2 pairs. One for transmit and one for receive. This way data traffic can flow in both directions simultaneously.

## Ethernet for the Layman (Continued)

### Souriau offering:

Standard solutions.

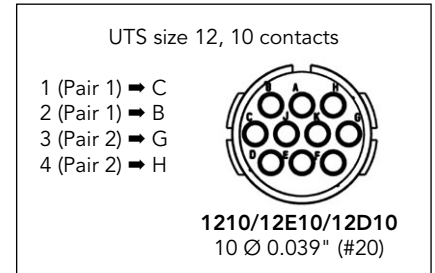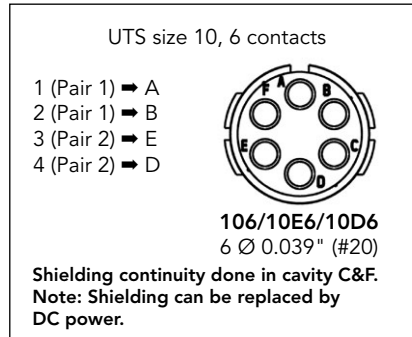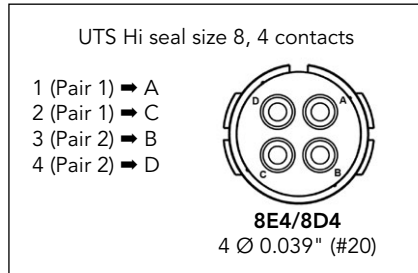

### What about using coax contacts ?

Ethernet twisted pairs carry a symmetrical (balanced) signal. Once terminated into a coax contact, the inner core will be protected by a shield - but not the outer contact. Because of EMI issues, the signal will no longer be balanced. Conclusion - it does not work and is not recommended.

### What about using Quadrax contacts ?

The Quadrax contact is used in railway applications because of the use of quad cable. In this specific market, the standard Ethernet twisted pairs wires cannot be offered, they are too thin and often solid (not stranded).

In the rest of industry, UTP (Unshielded Twisted Pairs) cables are widely used. The Quadrax contact is not designed to terminate them. And thus, are not advised for industrial applications.

### Conclusion

To carry 100Mb/s data signal, 100BaseTX or Fast Ethernet recommends the use of Cat5e connectors as well as Cat5e cable with the support of a 100MHz signal. Nevertheless, a 100Mb/s signal can be transmitted in certain conditions (short distance, only one connector, lower frequency but a different code) thru many other connection materials - not necessarily Cat5e rated.





# UTS SERIES

# Appendices

|                                              |     |
|----------------------------------------------|-----|
| ■ #16 Coaxial Contacts/Cabling Notices ..... | 200 |
| ■ Glossary of Terms .....                    | 207 |
| ■ Discrimination/Keying Methods .....        | 208 |
| ■ Part Number Index .....                    | 209 |

# #16 Coaxial Contacts

## Coaxial Cable - Contact Monocrimp and Multipiece

| Cable type                    | Impe-<br>dance | Contact<br>type | Ø over<br>jacket |          | Ø over<br>dielectric |       | Inner<br>cond<br>size<br><br>Ext.<br>Ø<br>mm | Ø outer braid |          | Male contact kit<br>for coaxial cable | Female contact kit<br>for coaxial cable |
|-------------------------------|----------------|-----------------|------------------|----------|----------------------|-------|----------------------------------------------|---------------|----------|---------------------------------------|-----------------------------------------|
|                               |                |                 | inch             | mm       | inch                 | mm    |                                              | inch          | mm       |                                       |                                         |
| RG161/U                       | 75             | Multi<br>piece  | 0.09"            | 2.29     | 0.057"               | 1.45  | -                                            | -             | -        | RMDXK10D28                            | RCDXK1D28                               |
| RG179A/U                      | 75             |                 | 0.105"           | 2.67     | 0.063"               | 1.6   | 0.3                                          | 0.084"        | 2.13 max |                                       |                                         |
| RG179B/U                      | 75             |                 | 0.105"           | 2.67     | 0.063"               | 1.6   | 0.3                                          | 0.084"        | 2.13 max |                                       |                                         |
| RG187/U                       | 75             |                 | 0.11"            | 2.79 max | 0.06"                | 1.52  | 0.3                                          | -             | -        |                                       |                                         |
| RG188/U                       | 50             |                 | 0.11"            | 2.79 max | 0.06"                | 1.52  | 0.51                                         | 0.078"        | 1.98 max |                                       |                                         |
| RG174/U                       | 50             |                 | 0.11"            | 2.92     | 0.06"                | 1.52  | 0.48                                         | 0.088"        | 2.24 max |                                       |                                         |
| AMPHENOL 21-598               | 50             |                 | 0.105"           | 2.67     | 0.06"                | 1.52  | 0.48                                         | -             | -        |                                       |                                         |
| RG196/U                       | 50             |                 | 0.08"            | 2.03 max | 0.034"               | 0.086 | 0.3                                          | -             | -        |                                       |                                         |
| RG178A/U                      | 50             |                 | 0.075"           | 1.91     | 0.034"               | 0.86  | 0.3                                          | 0.054"        | 1.37 max |                                       |                                         |
| RG/188A/U                     | 50             | Mono<br>crimp   | 0.110"           | 2.79     | 0.06"                | 1.52  | 0.51                                         | 0.078"        | 1.98 max | RMDX6036D28                           | RCDX6036D28                             |
| KX21TVT (europe)<br>RG178 B/U | 50             |                 | 0.075"           | 1.91     | 0.034"               | 0.86  | 0.3                                          | 0.054"        | 1.37 max | RMDX6034D28                           | RCDX6034D28                             |
| RG178 / BU                    | 50             |                 | 0.075"           | 1.91     | 0.034"               | 0.86  | 0.3                                          | 0.054"        | 1.37 max | RMDX6050D28                           | RCDX6016D28                             |
| RG174/U                       | 50             |                 | 0.115"           | 2.92     | 0.06"                | 1.52  | 0.48                                         | 0.088"        | 2.24 max | RMDX6032D28                           | RCDX6032D28                             |
| RG188A/U                      | 50             |                 | 0.11"            | 2.79     | 0.06"                | 1.52  | 0.51                                         | 0.078"        | 1.98 max | RMDX6036D28                           | RCDX6036D28                             |
| RG316/U                       | 50             |                 | 0.107"           | 2.72     | 0.06"                | 1.52  | 0.51                                         | 0.078"        | 2.05 max | RMDX6036D28                           | RCDX6036D28                             |
| raychem 5024A3111             | 50             |                 | 0.12"            | 3.05     | 0.083"               | 2.11  | 0.64                                         | 0.097"        | 2.46     | RMDX6052D28                           | RCDX6052D28                             |
| raychem 5026e1614             | 50             |                 | 0.083"           | 2.11     | 0.05"                | 1.27  | 0.48                                         | 0.067"        | 1.7      | RMDX6036D28                           | RCDX6036D28                             |
| surprenant pn 8134            | -              | Multi<br>piece  | 0.1"             | 2.54     | 0.058"               | 1.47  | 0.3                                          | -             | -        | RMDXK10D28                            | RCDXK1D28                               |
| PRD PN 247AS-<br>C1123-001    | -              | Mono<br>crimp   | 0.103"           | 2.62     | 0.06"                | 1.52  | 0.51                                         | 0.078"        | 1.98     | RMDX6018D28                           | RCDX6018D28                             |
| PRD PN 247AS-C1251            | -              |                 | 0.092"           | 2.34     | 0.05"                | 1.27  | 0.64                                         | 0.067"        | 1.7      | RMDX6018D28                           | RCDX6018D28                             |
| JUDD C15013010902             | -              |                 | 0.087"           | 2.13     | 0.05"                | 1.27  | 0.48                                         | 0.066"        | 1.67     | RMDX6036D28                           | RCDX6036D28                             |
| CDC PIN22939200               | -              |                 | 0.09"            | 2.29     | 0.048"               | 1.22  | 0.3                                          | 0.064"        | 1.63     | RMDX6046D28                           | RCDX6016D28                             |
| CDC PIN22939200               | -              |                 | 0.09"            | 2.29     | 0.048"               | 1.22  | 0.3                                          | 0.064"        | 1.63     | RMDX6050D28                           | RCDX6016D28                             |
| CDC PIN245670000              | -              |                 | 0.104"           | 2.64     | 0.067"               | 1.7   | 0.3                                          | 0.083"        | 2.11     | RMDX6050D28                           | RCDX6016D28                             |
| ampex                         | -              |                 | 0.114"           | 2.9      | 0.075"               | 1.91  | 0.38                                         | 0.09"         | 1.29     | RMDX6032D28                           | RCDX6032D28                             |
| TI PN 920580                  | -              |                 | 0.7"             | 1.78     | 0.038"               | 0.96  | 0.48                                         | 0.054v        | 1.37     | RMDX6024D28                           | RCDX6024D28                             |
| Honeywell PN 58000062         | -              |                 | 0.12"            | 3.05     | 0.077"               | 1.96  | 0.41<br>solid                                | 0.096"        | 2.44     | RMDX6026D28                           | RCDX6026D28                             |
| -                             | -              |                 | 0.104"           | 2.64     | 0.067"               | 1.7   | 0.3                                          | -             | 2.11     | RMDX6050D28                           | -                                       |
| -                             | -              |                 | 0.09"            | 2.29     | 0.048"               | 1.22  | 0.3                                          | -             | 1.63     | RMDX6050D28                           | -                                       |
| -                             | -              |                 | 0.114"           | 2.9      | 0.075"               | 1.91  | 0.38                                         | -             | 1.29     | RMDX6032D28                           | RCDX6032D28                             |
| -                             | -              |                 | 0.07"            | 1.78     | 0.038"               | 0.96  | 0.48                                         | -             | 1.37     | RMDX6024D28                           | RCDX6024D28                             |
| -                             | -              |                 | 0.12"            | 3.05     | 0.077"               | 1.96  | 0.41                                         | -             | 2.44     | RMDX6026D28                           | RCDX6026D28                             |

## Twisted Cable - Contact Monocrimp and Multipiece


| Cable type                                                | Contact type | Inner AWG cond | Ø over jacket (single wire) |          | Inner cond size     |           | Ø outer braid |         | Male contact kit for coaxial cable | Female contact kit for coaxial cable |
|-----------------------------------------------------------|--------------|----------------|-----------------------------|----------|---------------------|-----------|---------------|---------|------------------------------------|--------------------------------------|
|                                                           |              |                | inch                        | mm       | Stranded definition | Ext. Ø mm | inch          | mm      |                                    |                                      |
| 2#24 stranded MIL-W-16878 type B                          | Multi piece  | 24             | 0.049"                      | 1.24 max | 7/.008              | -         | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| 2 #24 solid MIL-W-76 type LW                              |              | 24             | 0.047"                      | 1.12 max | 1/.0201             | -         | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| 2 #26 stranded MIL-W-76 type LW or MIL-W-16878 type B&E   |              | 26             | 0.043"                      | 1.09 max | 7/.0063             | 0.16      | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| 2 #28 solid MIL-W-81822/3                                 |              | 28             | 0.028"                      | 0.71 max | -                   | -         | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| Twisted pair 1/.201 solid MIL-W-76 type LW or MIL-W-16878 |              | 26             | 0.044"                      | 1.12 max | 1/.0201             | 0.511     | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| Twisted pair solid MIL-W-81822/3                          |              | 28             | 0.028"                      | 0.71 max | 1/.0126             | 0.32      | -             | -       | RMDXK10D28                         | RCDXK1D28                            |
| #28 7/.0036 per Hitachi spec ec-711 (13-2820)             | Mono crimp   | -              | 0.046"                      | 1.17     | 7/.0036             | -         | -             | -       | RMDX6031D28 + YORX090              | RCDX6031D28 + YORX090                |
| 20218201                                                  |              | -              | 0.028"                      | 0.71     | -                   | -         | -             | -       | RMDX6031D28 + YORX090              | RCDX6031D28 + YORX090                |
| #30 solid                                                 |              | -              | 0.025"                      | 0.64     | -                   | -         | -             | -       | RMDX6015D28 + YORX090              | RCDX6015D28 + YORX090                |
| #26 7/.0063                                               |              | 26             | 0.028"                      | 0.71     | 7/.063              | 0.16      | -             | -       | RMDX6031D28 + YORX090              | RCDX6031D28 + YORX090                |
| #26 19/.004                                               |              | 26             | 0.049"                      | 1.24     | 19/.004             | -         | -             | -       | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| #24 7/.008                                                |              | 24             | 0.049"                      | 1.24     | 7/.008              | -         | -             | -       | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| #24 19/.005                                               |              | 24             | 0.057"                      | 1.45     | 19/.005             | -         | -             | -       | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| -                                                         |              | 26             | -                           | 1.25     | -                   | -         | -             | 19x0.1  | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| -                                                         |              | 24             | -                           | 1.25     | -                   | -         | -             | 7x0.2   | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| -                                                         |              | 24             | -                           | 1.45     | -                   | -         | -             | 19x0.13 | RMDX6019D28 + YORX090              | RCDX6019D28 + YORX090                |
| -                                                         |              | 26             | -                           | 0.7      | -                   | -         | -             | 7x0.16  | RMDX6031D28 + YORX090              | RCDX6031D28 + YORX090                |

# #16 Coaxial Contacts (Continued)


## Twisted Pair Cable Multipiece Contact Cabling

| Cable reference                                           | Contact type | Male contact | Female contact | Crimp tool | Die set | Stop bushing | Cable strip length |   |   | Inner conductor crimp |       | Braid crimp |       |
|-----------------------------------------------------------|--------------|--------------|----------------|------------|---------|--------------|--------------------|---|---|-----------------------|-------|-------------|-------|
|                                                           |              |              |                |            |         |              | A                  | B | C | g dim                 | t dim | g dim       | t dim |
| 2#24 stranded mil w 16878 type B                          | Multi piece  | RMDXK10D28   | RCDXK1D28      | M10S1J     | -       | -            |                    |   |   | See assembly notice   |       |             |       |
| 2 #24 solid mil-w-76 type LW                              |              |              |                |            |         |              |                    |   |   |                       |       |             |       |
| 2 #26 stranded mil w 76 type LW or mil w16878 type B & E  |              |              |                |            |         |              |                    |   |   |                       |       |             |       |
| 2 #28 solid mil-w-81822/3                                 |              |              |                |            |         |              |                    |   |   |                       |       |             |       |
| twisted pair 1/.201 solid mil w 76 type LW or mil w 16878 |              |              |                |            |         |              |                    |   |   |                       |       |             |       |
| twisted pair solid mil w 81822/3                          |              |              |                |            |         |              |                    |   |   |                       |       |             |       |

### Female contact

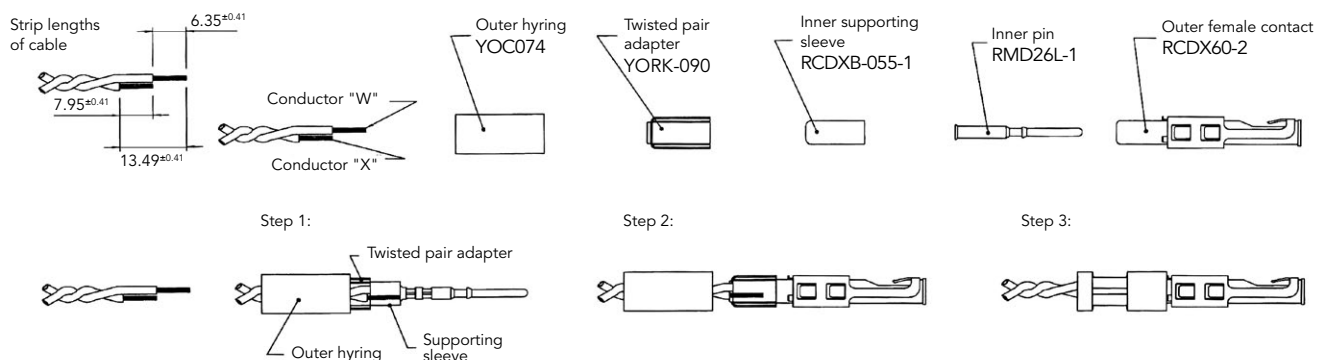

### Male contact



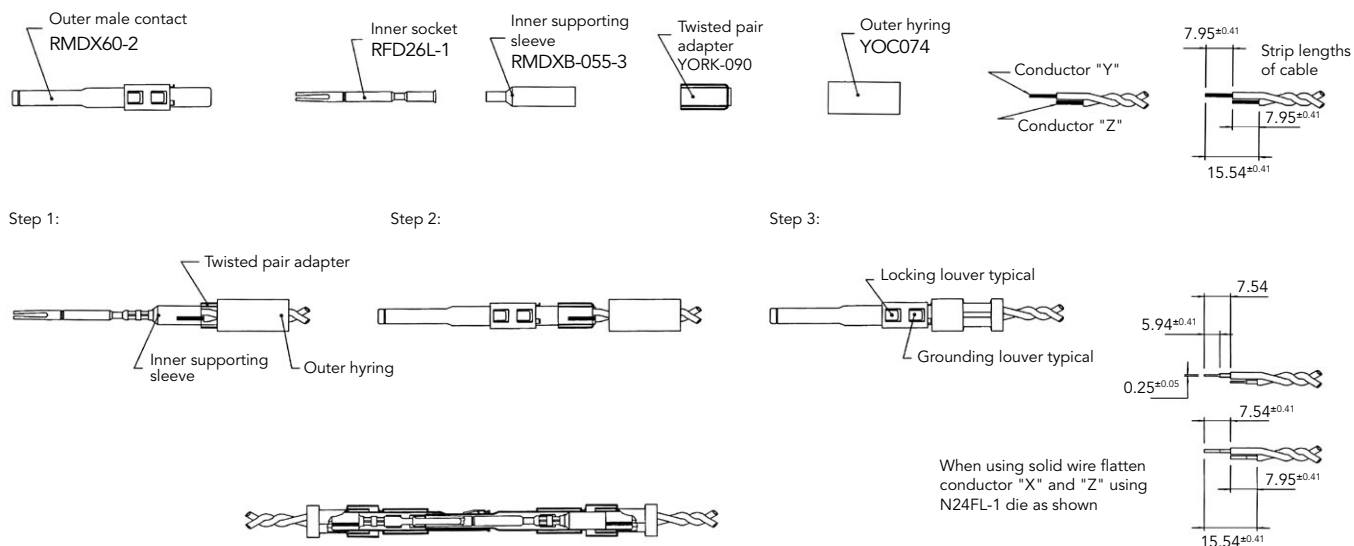


## Twisted Pair Cable Monocrimp Contact Cabling


| Cable reference                               | Contact type | Male contact          | Female contact        | Crimp tool | Die set                                             | Stop bushing | Cable strip length |     |      | Inner conductor crimp |              | Braid crimp  |              |
|-----------------------------------------------|--------------|-----------------------|-----------------------|------------|-----------------------------------------------------|--------------|--------------------|-----|------|-----------------------|--------------|--------------|--------------|
|                                               |              |                       |                       |            |                                                     |              | A                  | B   | C    | g dim                 | t dim        | g dim        | t dim        |
| #28 7/.0036 per Hitachi spec ec-711 (13-2820) | Mono crimp   | RMDX6031D28 + YORX090 | RCDX6031D28 + YORX090 | M10S1J     | S80                                                 | SL105        | 4.7                | 6.1 | 4.32 | 1.30 to 1.12          | 1.4 to 1.22  | 2.97 to 2.84 | 3.07 to 2.9  |
| 20218204                                      |              |                       |                       |            | S80                                                 | SL105        | 3.94               | 6.1 | 3.16 | 1.30 to 1.17          | 1.4 to 1.22  | 2.97 to 2.84 | 3.07 to 2.79 |
| #30 solid                                     |              |                       |                       |            | S83                                                 | SL105        | 4.7                | 6.1 | 4.06 | 1.22 to 1.12          | 1.35 to 1.22 | 2.97 to 2.84 | 3.12 to 2.95 |
| #26 7/.0063                                   |              |                       |                       |            | S80                                                 | SL105        | 4.7                | 6.1 | 4.06 | 1.30 to 1.17          | 1.4 to 1.22  | 2.97 to 2.84 | 3.07 to 2.9  |
| #26 19/.004                                   |              |                       |                       |            | M10SG8 ASSY'Y TOOL DIE SET STOP BUSHING M10S1J TOOL |              | 4.7                | 6.1 | 4.06 | 1.22 to 1.17          | 1.35 to 1.22 | 2.84 to 2.79 | 3.12 to 2.97 |
| #24 7/.008                                    |              |                       |                       |            |                                                     |              | 4.7                | 6.1 | 4.06 | 1.22 to 1.17          | 1.35 to 1.22 | 2.84 to 2.79 | 3.12 to 2.97 |
| #24 19/.005                                   |              |                       |                       |            |                                                     |              | 4.7                | 6.1 | 4.06 | 1.22 to 1.17          | 1.35 to 1.22 | 2.84 to 2.79 | 3.12 to 2.97 |
| AWG26 (19x0.1)                                |              |                       |                       |            | M10SG8 crimping kit                                 |              | 4.7                | 6   | 4    |                       |              |              |              |
| AWG24 (7x0.2)                                 |              |                       |                       |            |                                                     |              |                    |     |      |                       |              |              |              |
| AWG24 (19x0.13)                               |              |                       |                       |            |                                                     |              |                    |     |      |                       |              |              |              |
| AWG26 (7x0.16)                                |              |                       |                       |            | S80                                                 | SL105        |                    |     |      |                       |              |              |              |

- Select appropriate monocrimp coax twisted pair contact and cable combination.
- Select appropriate crimp tooling (hand tool, S-die set, stop bushing).
- Strip the twisted pair cable to the designated wire strip lengths.
- Insert the stripped cable into the contact. One cable is to be inserted into the inside diameter of hyring, and pushed forward into the inner contact. The second cable is to be inserted between the outside diameter of hyring and the inside diameter of the outer contact body.
- Crimp the contact.

Cable strip length

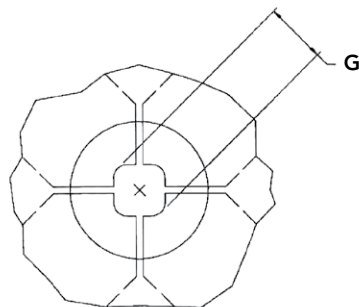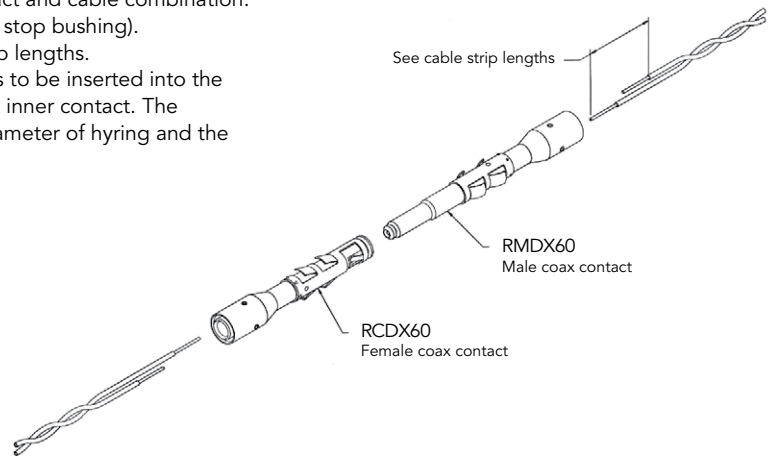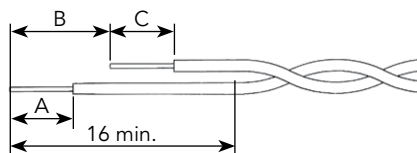

Braid crimp (G) to be measured with die set fully closed



Inner conductor crimp (G) to be measured with die set fully closed

Note : all dimensions are in mm



## #16 Coaxial Contacts (Continued)


### Multipiece Male Contact with Coax Cable

| Cable<br>reference    | Contact                 | Hyring<br>complementary<br>compoments | Outer contact crimp tool |              | Inner contact crimp tool |              | Cable strip length |      |       |
|-----------------------|-------------------------|---------------------------------------|--------------------------|--------------|--------------------------|--------------|--------------------|------|-------|
|                       |                         |                                       | Crimp tool M10S1J        |              | Crimp tool M10S1J        |              |                    |      |       |
|                       |                         |                                       | Die set                  | Stop bushing | Die set                  | Stop bushing | A                  | B    | C     |
| RG161U                | Male:<br><br>RMDXK10D28 | YOC074                                | S221                     | SL471        | S23D2                    | SL46D2       | 4.37               | 7.95 | 15.88 |
| RG179                 |                         |                                       |                          |              |                          |              | 4.37               | 7.95 | 15.88 |
| RG187U                |                         |                                       |                          |              |                          |              | 4.37               | 7.95 | 15.88 |
| RG188/U               |                         |                                       |                          |              |                          |              | 4.37               | 7.95 | 15.88 |
| RG174/U               |                         |                                       |                          |              | S26D2                    |              | 4.37               | 7.95 | 15.88 |
| RG178A/U              |                         | YOC074 +<br>RMDXB0553                 |                          |              | S23D2                    |              | 7.54               | 9.12 | 17.53 |
| RG196U                |                         |                                       |                          |              |                          |              | 7.54               | 9.12 | 17.53 |
| AMPHENOL<br>21-598    |                         | YOC074                                |                          |              | -                        |              | 4.37               | 7.95 | 15.88 |
| surprenant pn<br>8134 |                         |                                       |                          |              | -                        |              | 4.37               | 7.95 | 15.88 |


#### Multipiece kit details

|                     |            |                         |
|---------------------|------------|-------------------------|
| RMDXK10D28 includes | RMDX60D28  | Outer contact           |
|                     | RFD26L1D28 | Inner contact           |
|                     | YOC074     | Outer hyring            |
|                     | RMDXB0553  | Inner supporting sleeve |


#### Cable strip length

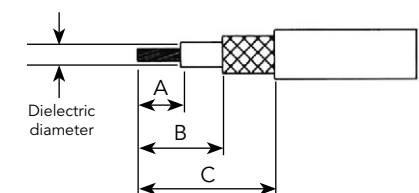

#### Contact assembly with dielectric diameter over 1.4mm - without inner supporting sleeve

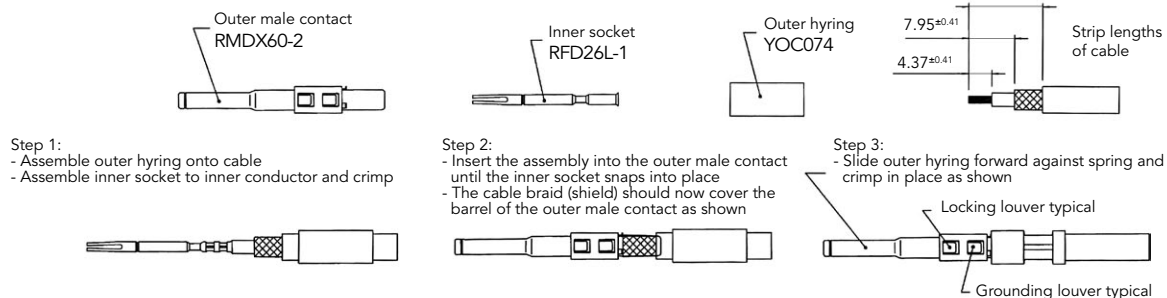

#### Contact assembly with dielectric diameter under 1.4mm - with inner supporting sleeve

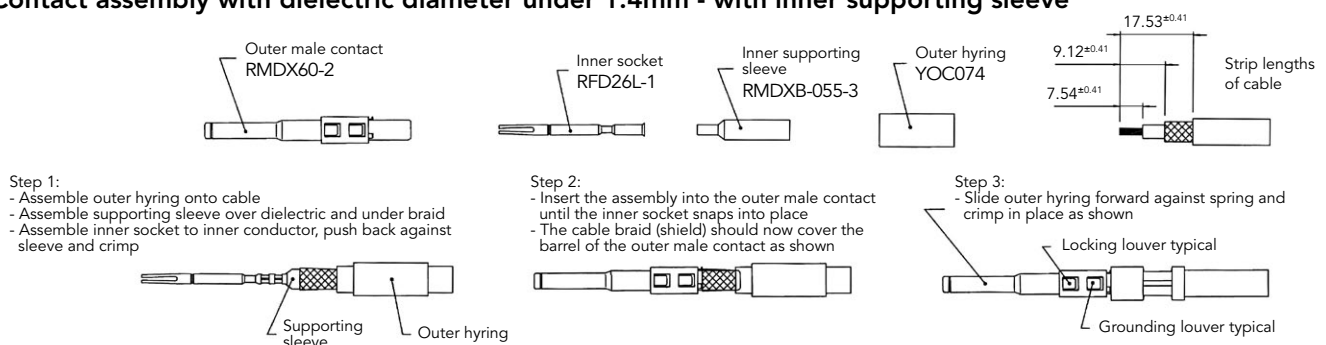

Note : all dimensions are in mm


## Multipiece Female Contact with Coax Cable

| Cable<br>reference    | Contact              | Hying<br>complementary<br>compoments | Outer contact crimp tool |              | Inner contact crimp tool |              | Cable strip length |   |       |
|-----------------------|----------------------|--------------------------------------|--------------------------|--------------|--------------------------|--------------|--------------------|---|-------|
|                       |                      |                                      | Crimp tool M10S1J        |              | Crimp tool M10S1J        |              |                    |   |       |
|                       |                      |                                      | Die set                  | Stop bushing | Die set                  | Stop bushing | A                  | B | C     |
| RG161U                | Female:<br>RCDXK1D28 | YOC074                               | S221                     | SL471        | S23D2                    | SL46D2       | 4.37               | - | 11.13 |
| RG179                 |                      |                                      |                          |              |                          |              | 4.37               |   | 11.13 |
| RG187U                |                      |                                      |                          |              |                          |              | 4.37               |   | 11.13 |
| RG188/U               |                      |                                      |                          |              | 4.37                     |              | 11.13              |   |       |
| RG174/U               |                      | S26D2                                |                          |              | 4.37                     |              | 11.13              |   |       |
| RG178A/U              |                      | YOC074 +<br>RMDXB0553                |                          |              | S23D2                    |              | 6.35               |   | 11.13 |
| RG196U                |                      |                                      |                          |              | 6.35                     |              | 11.13              |   |       |
| AMPHENOL<br>21-598    |                      | YOC074                               |                          |              | -                        |              | 4.37               |   | 11.13 |
| surprenant pn<br>8134 |                      |                                      |                          |              | -                        |              | 4.37               |   | 11.13 |


### Multipiece kit details

|                    |            |                         |
|--------------------|------------|-------------------------|
| RCDXK1D28 includes | RCDX602D28 | Outer contact           |
|                    | RMD26L1D28 | Inner contact           |
|                    | YOC074     | Outer hying             |
|                    | RCDXB0553  | Inner supporting sleeve |


### Cable strip length

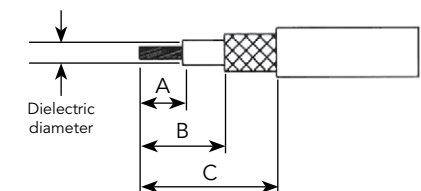

### Contact assembly with dielectric diameter over 1.4mm - without inner supporting sleeve

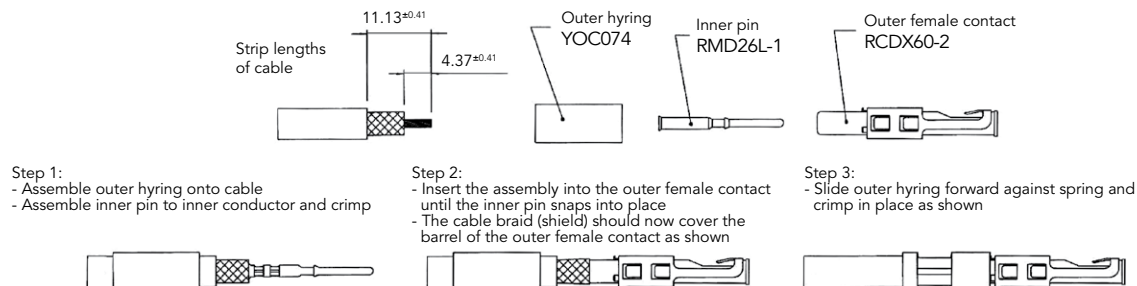

### Contact assembly with dielectric diameter under 1.4mm - with inner supporting sleeve

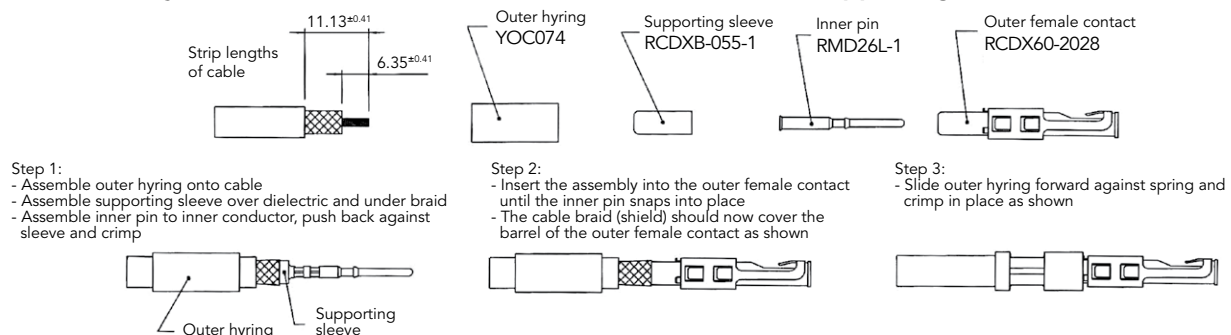

Note : all dimensions are in mm



## #16 Coaxial Contacts (Continued)

### Coax Cable with Monocrimp Contact Cabling

| Cable reference                     | Male contact | Female contact | Crimp tool | Die set                                                      | Stop bushing | Cable strip length |      |       | Inner conductor crimp |           | Braid crimp |           |
|-------------------------------------|--------------|----------------|------------|--------------------------------------------------------------|--------------|--------------------|------|-------|-----------------------|-----------|-------------|-----------|
|                                     |              |                |            |                                                              |              | A                  | B    | C     | g dim                 | t dim     | g dim       | t dim     |
| CDC PIN22939200                     | RMDX6046D28  | RCDX6016D28    | M10S1J     | S80                                                          | SL105        | 4.19               | 5.97 | 8.51  | 1.30/1.17             | 1.40/1.22 | 2.77/2.64   | 3.02/2.84 |
| CDC PIN22939200                     | RMDX6046D28  | RCDX6016D28    |            | S87                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.30/1.17             | 1.40/1.22 | 2.77/2.64   | 3.02/2.84 |
| CDC PIN245670000                    | RMDX6050D28  | RCDX6016D28    |            | S80                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.30/1.17             | 1.40/1.22 | 2.97/2.84   | 3.12/2.95 |
| KX21TVT (europe)<br>RG178 B/U       | RMDX6034D28  | RCDX6034D28    |            | S82                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.30/1.17             | 1.32/1.17 | 2.84/2.74   | 3.07/2.9  |
| RG178 / BU                          | RMDX6050D28  | RCDX6016D28    |            | S87                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.30/1.17             | 1.40/1.22 | 2.77/2.64   | 3.02/2.84 |
| ampex                               | RMDX6032D28  | RCDX6032D28    |            | S80                                                          | SL105        | 5.08               | 6.35 | 11.68 | 1.30/1.17             | 1.40/1.22 | 2.97/2.84   | 3.12/2.95 |
| TI PN 920580                        | RMDX6024D28  | RCDX6024D28    |            | S82                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.35/1.19             | 1.42/1.27 | 2.87/2.74   | 3.07/2.9  |
| RG174/U                             | RMDX6032D28  | RCDX6032D28    |            | S80                                                          | SL105        | 5.08               | 6.35 | 11.68 | 1.30/1.17             | 1.40/1.22 | 2.97/2.84   | 3.12/2.95 |
| Honeywell PN 58000062               | RMDX6026D28  | RCDX6026D28    |            | S82                                                          | SL105        | 5.08               | 6.35 | 8.89  | 1.35/1.19             | 1.42/1.27 | 2.87/2.74   | 3.07/2.9  |
| RG188A/U                            | RMDX6036D28  | RCDX6036D28    |            | S80                                                          | SL105        | 5.08               | 6.35 | 11.68 | 1.30/1.17             | 1.40/1.22 | 2.97/2.84   | 3.12/2.95 |
| RG316/U                             | RMDX6036D28  | RCDX6036D28    |            | S80                                                          | SL105        | 5.08               | 6.35 | 11.68 | 1.30/1.17             | 1.40/1.22 | 2.97/2.84   | 3.12/2.95 |
| PRD PN 247AS-C1123-001              | RMDX6018D28  | RCDX6018D28    |            | M10SG8 ASSY'Y<br>TOOL DIE SET<br>STOP BUSHING<br>M10S1J TOOL |              | 5.08               | 6.35 | 8.89  | 1.22/1.17             | 1.35/1.22 | 2.92/2.79   | 3.12/2.97 |
| PRD PN 247AS-C1251                  | RMDX6018D28  | RCDX6018D28    |            |                                                              |              | 5.08               | 6.35 | 8.89  | 1.22/1.17             | 1.35/1.22 | 2.92/2.79   | 3.12/2.97 |
| raychem 5024A3111                   | RMDX6052D28  | RCDX6052D28    |            | S88                                                          | SL105        | 5.08               | 6.35 | 11.68 | 1.37/1.27             | 1.45/1.32 | 2.92/2.79   |           |
| raychem 5026e1614                   | RMDX6036D28  | RCDX6036D28    |            | M10SG8 ASSY'Y<br>TOOL DIE SET<br>STOP BUSHING<br>M10S1J TOOL |              | 5.08               | 6.35 | 8.89  | 1.22/1.17             | 1.35/1.22 | 2.92/2.79   | 3.12/2.97 |
| JUDD C15013010902                   | RMDX6036D28  | RCDX6036D28    |            |                                                              |              | 5.08               | 6.35 | 8.89  | 1.22/1.17             | 1.35/1.22 | 2.92/2.79   | 3.12/2.97 |
| inner cond. #30,<br>braid diam 2.64 | RMDX6050D28  | -              |            | S80                                                          | SL105        | 5.1                | 6.35 | 8.9   | -                     | -         | -           | -         |
| inner cond. #30,<br>braid diam 2.29 | RMDX6050D28  | -              |            | S87                                                          | SL105        | 4.2                | 6.35 | 8.5   | -                     | -         | -           | -         |
| inner cond. #28,<br>braid diam 2.9  | RMDX6032D28  | RCDX6032D28    |            | S80                                                          | SL105        | 5.1                | 6.35 | 11.7  | -                     | -         | -           | -         |
| inner cond. #26,<br>braid diam 1.78 | RMDX6024D28  | RCDX6024D28    |            | S82                                                          | SL105        | 5.1                | 6.35 | 8.9   | -                     | -         | -           | -         |
| inner cond. #26,<br>braid diam 3.05 | RMDX6026D28  | RCDX6026D28    |            | S82                                                          | SL105        | 5.1                | 6.35 | 8.9   | -                     | -         | -           | -         |

- Select appropriate cable and contact combination.
- Select appropriate crimp tooling (hand tool, S-die set, stop bushing).
- Strip coax cable to the designated wire strip lengths.
- Insert the stripped coax into the rear of the contact.
- Crimp the contact.

Cable strip length

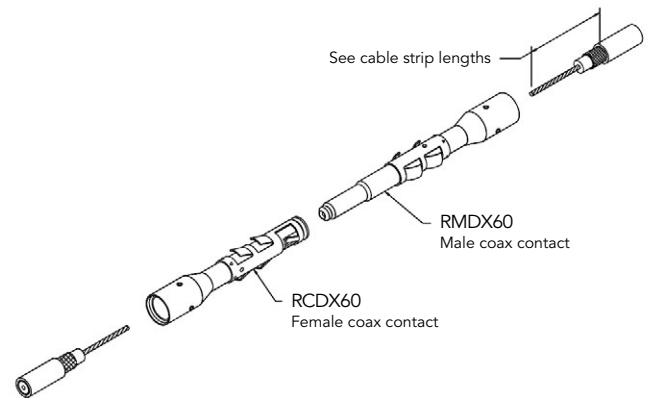


## Glossary of Terms

### • Clearance

Per the IEC 60664-1 it is the shortest distance between two conductive parts even over the air.

### • Creepage distance

Per the IEC 60664-1 it represents the shortest distance along the surface of the insulating material between two conductive parts.



### • Working voltage

Per the IEC 60664-1 it is the highest r.m.s. value of A.C. or D.C. voltage across any particular insulation which can occur when the equipment is supplied at rated voltage.

### • Rated impulse voltage

Impulse withstands voltage value assigned by the manufacturer to the equipment or to a part of it characterizing the specified withstand capability of its insulation against transient overvoltage.

### • Working current

It is the maximum continuous and not interrupted current able to be carried by all contacts without exceeding the maximum temperature of the insulating material.

### • Transient voltage

Extract from the IEC 60664-1: Short duration overvoltage of a few millisecond or less, oscillatory or non-oscillatory, usually highly damped.

### • CTI (Comparative Tracking Index)

The CTI value is commonly used to characterise the electrical breakdown properties of an insulating material. It allows users to know the tendency to create creepage paths. This value represents the maximum voltage after 50 drops of ammonium chloride solution without any breakdown.

### • RTI (Relative temperature Index):

Extract from ULs website:


Maximum service temperature for a material, where a class of critical property will not be unacceptably compromised through chemical thermal degradation, over the reasonable life of an electrical product, relative to a reference material having a confirmed, acceptable corresponding performance defined RTI.

- **RTI Elec:** Electrical RTI, associated with critical electrical insulating properties.
- **RTI Mech Imp:** Mechanical Impact RTI, associated with critical impact resistance, resilience and flexibility properties.
- **RTI Mech Str:** Mechanical Strength (Mechanical without Impact) RTI, associated with critical mechanical strength where impact resistance, resilience and flexibility are not essential.

## Discrimination/Keying Methods

In applications where similar connectors are used next to each other, mismatching can cause disturbances, system failure or even danger to operating personnel.

To eliminate mismatching, some Trim Trio® connectors are offered with discrimination keys to avoid interconnection system errors. In addition, the connector insert can also be rotated inside the shell to create custom keying options.

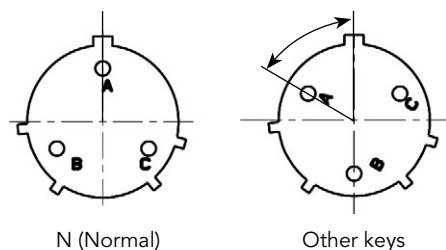

Note: Insert rotated in body (viewed from front face of male insert)

Connectors with rotated inserts can be ordered by adding the suffix W, X, Y or Z to the standard part number.

e.g. **UTS6JC104S** (N key) → **UTS6JC104SW** (W key)

Consult us for overmolded harnesses.

| Shell size | Layout      | Discrimination keys degrees |      |      |      |
|------------|-------------|-----------------------------|------|------|------|
|            |             | W                           | X    | Y    | Z    |
| 8          | 8E2/8D2     | 58°                         | 122° | -    | -    |
|            | 8E3/8D3     | 60°                         | 210° | -    | -    |
|            | 8E3A/ 8D3A  |                             |      |      |      |
|            | 8E98/8D98   | 45°                         | -    | -    | -    |
| 10         | 8E4/8D4     |                             |      |      |      |
|            | 8E33/8D33   | 90°                         | -    | -    | -    |
|            | 103         | -                           | -    | -    | -    |
|            | 104         | 45°                         | -    | -    | -    |
|            | 102W2/103W3 | -                           | -    | -    | -    |
|            | 106         | 90°                         | -    | -    | -    |
|            | 10E6/10D6   |                             |      |      |      |
| 12         | 10E7/10D7   | 90°                         | -    | -    | -    |
|            | 10E98/10D98 | 90°                         | 180° | 240° | 270° |
|            | 12E2/12D2   | -                           | -    | -    | -    |
|            | 12E3/12D3   | -                           | -    | 180° | -    |
|            | 124         | -                           | -    | -    | -    |
|            | 12E4/12D4   |                             |      |      |      |
|            | 128         | 26°                         | -    | -    | -    |
|            | 12E8/12D8   | 90°                         | 112° | 203° | 292° |
|            | 1210        | 60°                         | 155° | 270° | 295° |
|            | 12E10/12D10 |                             |      |      |      |
|            | 12E14/12D14 | 45°                         | -    | -    | -    |
|            | 14E5/14D5   | 40°                         | 92°  | 184° | 273° |
| 14         | 142G1       | -                           | -    | -    | -    |
|            | 147         | -                           | -    | -    | -    |
|            | 14E7/14D7   |                             |      |      |      |
|            | 148         | -                           | -    | -    | -    |
|            | 1412        | 60°                         | -    | -    | -    |
|            | 1492        | 49°                         | 71°  | 145° | -    |
|            | 14E12/14D12 | 43°                         | 90°  | -    | -    |
|            | 14E15/14D15 | 17°                         | 110° | 155° | 234° |
|            | 14E18/14D18 | 15°                         | 90°  | 180° | 270° |
|            | 1419        | 30°                         | 165° | 315° | -    |
|            | 14E19/14D19 | 30°                         | 165° | 315° | -    |
| 18         | 183G1       | -                           | -    | -    | -    |
|            | 18X2M3      | -                           | -    | -    | -    |
|            | 1823        | -                           | 158° | -    | 270° |
|            | 1832        | 85°                         | 138° | 222° | 265° |
|            | 18E32       |                             |      |      |      |

### SMSPE0 (only for UTS layouts using #16 contacts)

When one of these dummy contacts is used, the UTS connector will only mate with a connector which has a vacant cavity at the corresponding position.

The material used is polyamide 6.6.



# Part Number Index

## Connectors

|                   |        |                    |        |                     |        |
|-------------------|--------|--------------------|--------|---------------------|--------|
| UTS0104P .....    | P. 68  | UTS014D12S .....   | P. 120 | UTS1GN1412P .....   | P. 116 |
| UTS0104S .....    | P. 68  | UTS014D15P .....   | P. 132 | UTS1GN147P .....    | P. 92  |
| UTS010D6P .....   | P. 84  | UTS014D15S .....   | P. 132 | UTS1JC102W2P .....  | P. 64  |
| UTS010D6S .....   | P. 84  | UTS014D18P .....   | P. 136 | UTS1JC102W2S .....  | P. 64  |
| UTS710D6P .....   | P. 84  | UTS014D18S .....   | P. 136 | UTS1JC103P .....    | P. 28  |
| UTS710D6P32 ..... | P. 84  | UTS014D19P .....   | P. 140 | UTS1JC103S .....    | P. 28  |
| UTS710D6S .....   | P. 84  | UTS014D19S .....   | P. 140 | UTS1JC103W3P .....  | P. 80  |
| UTS710D6S32 ..... | P. 84  | UTS014D5P .....    | P. 72  | UTS1JC103W3S .....  | P. 80  |
| UTS010D98P .....  | P. 88  | UTS014D5S .....    | P. 72  | UTS1JC104P .....    | P. 68  |
| UTS010D98S .....  | P. 88  | UTS014E12P .....   | P. 120 | UTS1JC104S .....    | P. 68  |
| UTS010E6P .....   | P. 84  | UTS014E12S .....   | P. 120 | UTS1JC106P .....    | P. 84  |
| UTS010E6S .....   | P. 84  | UTS014E15P .....   | P. 132 | UTS1JC106S .....    | P. 84  |
| UTS010D7P .....   | P. 96  | UTS014E15S .....   | P. 132 | UTS1JC1210P .....   | P. 112 |
| UTS010D7S .....   | P. 96  | UTS014E18P .....   | P. 136 | UTS1JC1210S .....   | P. 112 |
| UTS010E7P .....   | P. 96  | UTS014E18S .....   | P. 136 | UTS1JC124P .....    | P. 52  |
| UTS010E7S .....   | P. 96  | UTS014E19P .....   | P. 140 | UTS1JC124PSCR ..... | P. 52  |
| UTS010E98P .....  | P. 88  | UTS014E19S .....   | P. 140 | UTS1JC124S .....    | P. 52  |
| UTS010E98S .....  | P. 88  | UTS014E5P .....    | P. 72  | UTS1JC128P .....    | P. 100 |
| UTS0124P .....    | P. 52  | UTS014E5S .....    | P. 72  | UTS1JC128S .....    | P. 100 |
| UTS0128P .....    | P. 100 | UTS014E7P .....    | P. 92  | UTS1JC1412P .....   | P. 116 |
| UTS0128S .....    | P. 100 | UTS014E7S .....    | P. 92  | UTS1JC1412S .....   | P. 116 |
| UTS012D10P .....  | P. 112 | UTS01823P .....    | P. 144 | UTS1JC1419P .....   | P. 140 |
| UTS012D10S .....  | P. 112 | UTS01823S .....    | P. 144 | UTS1JC1419S .....   | P. 140 |
| UTS012D14P .....  | P. 128 | UTS018E32P .....   | P. 148 | UTS1JC142G1P .....  | P. 32  |
| UTS012D14S .....  | P. 128 | UTS08D2P .....     | P. 20  | UTS1JC142G1S .....  | P. 32  |
| UTS012D2P .....   | P. 24  | UTS08D2S .....     | P. 20  | UTS1JC147P .....    | P. 92  |
| UTS012D2S .....   | P. 24  | UTS08D33P .....    | P. 44  | UTS1JC1492P .....   | P. 124 |
| UTS012D3P .....   | P. 48  | UTS08D33S .....    | P. 44  | UTS1JC1492S .....   | P. 124 |
| UTS012D3S .....   | P. 48  | UTS08D3AP .....    | P. 40  | UTS1JC147PSCR ..... | P. 92  |
| UTS012D4P .....   | P. 52  | UTS08D3AS .....    | P. 40  | UTS1JC147S .....    | P. 92  |
| UTS012D4S .....   | P. 52  | UTS08D3P .....     | P. 36  | UTS1JC148P .....    | P. 108 |
| UTS012D8P .....   | P. 104 | UTS08D3S .....     | P. 36  | UTS1JC148S .....    | P. 108 |
| UTS012D8S .....   | P. 104 | UTS08D4P .....     | P. 60  | UTS1JC1823P .....   | P. 144 |
| UTS012E10P .....  | P. 112 | UTS08D4S .....     | P. 60  | UTS1JC1823S .....   | P. 144 |
| UTS012E10S .....  | P. 112 | UTS08D98P .....    | P. 40  | UTS1JC1832P .....   | P. 148 |
| UTS012E14P .....  | P. 128 | UTS08D98S .....    | P. 40  | UTS1JC1832S .....   | P. 148 |
| UTS012E14S .....  | P. 128 | UTS08E2P .....     | P. 20  | UTS1JC18LCN .....   | P. 152 |
| UTS012E2P .....   | P. 24  | UTS08E2S .....     | P. 20  | UTS1JC18MPN .....   | P. 156 |
| UTS012E2S .....   | P. 24  | UTS08E33P .....    | P. 44  | UTS6102W2P .....    | P. 64  |
| UTS012E3P .....   | P. 48  | UTS08E33S .....    | P. 44  | UTS6102W2S .....    | P. 64  |
| UTS012E3S .....   | P. 48  | UTS08E3AP .....    | P. 40  | UTS6103P .....      | P. 28  |
| UTS012E4P .....   | P. 52  | UTS08E3AS .....    | P. 40  | UTS6103S .....      | P. 28  |
| UTS012E4S .....   | P. 52  | UTS08E3P .....     | P. 36  | UTS6103W3P .....    | P. 80  |
| UTS012E8P .....   | P. 104 | UTS08E3S .....     | P. 36  | UTS6103W3S .....    | P. 80  |
| UTS012E8S .....   | P. 104 | UTS08E4P .....     | P. 60  | UTS6104P .....      | P. 68  |
| UTS01412P .....   | P. 116 | UTS08E4S .....     | P. 60  | UTS6104S .....      | P. 68  |
| UTS01412S .....   | P. 116 | UTS08E98P .....    | P. 40  | UTS6106P .....      | P. 84  |
| UTS0142G1P .....  | P. 32  | UTS08E98S .....    | P. 40  | UTS6106S .....      | P. 84  |
| UTS0147P .....    | P. 92  | UTS1GJC104P .....  | P. 68  | UTS610E6P .....     | P. 84  |
| UTS0147S .....    | P. 92  | UTS1GJC128P .....  | P. 100 | UTS610E6S .....     | P. 84  |
| UTS014D7P .....   | P. 92  | UTS1GJC1412P ..... | P. 116 | UTS610E7P .....     | P. 96  |
| UTS014D7S .....   | P. 92  | UTS1GJC147P .....  | P. 92  | UTS610E7S .....     | P. 96  |
| UTS014D12P .....  | P. 120 | UTS1GN104P .....   | P. 68  | UTS610E98P .....    | P. 88  |
|                   |        | UTS1GN128P .....   | P. 100 | UTS610E98S .....    | P. 88  |

## Part Number Index (Continued)

|                   |        |                     |        |                     |        |
|-------------------|--------|---------------------|--------|---------------------|--------|
| UTS61210P .....   | P. 112 | UTS68E3P .....      | P. 36  | UTS6JC142G1P .....  | P. 32  |
| UTS61210S .....   | P. 112 | UTS68E3S .....      | P. 36  | UTS6JC142G1S .....  | P. 32  |
| UTS6124P .....    | P. 52  | UTS68E4P .....      | P. 60  | UTS6JC147P .....    | P. 92  |
| UTS6124PSCR ..... | P. 52  | UTS68E4S .....      | P. 60  | UTS6JC147PSCR ..... | P. 92  |
| UTS6124SSCR ..... | P. 52  | UTS68E98P .....     | P. 40  | UTS6JC147S .....    | P. 92  |
| UTS6128P .....    | P. 100 | UTS68E98S .....     | P. 40  | UTS6JC147SSCR ..... | P. 92  |
| UTS6128S .....    | P. 100 | UTS6GJC104S .....   | P. 68  | UTS6JC1492P .....   | P. 124 |
| UTS612E10P .....  | P. 112 | UTS6GJC128S .....   | P. 100 | UTS6JC1492S .....   | P. 124 |
| UTS612E10S .....  | P. 112 | UTS6GJC1412S .....  | P. 116 | UTS6JC148P .....    | P. 108 |
| UTS612E14P .....  | P. 128 | UTS6GJC147S .....   | P. 92  | UTS6JC148S .....    | P. 108 |
| UTS612E14S .....  | P. 128 | UTS6GN104S .....    | P. 68  | UTS6JC14E12P .....  | P. 120 |
| UTS612E2P .....   | P. 24  | UTS6GN128S .....    | P. 100 | UTS6JC14E12S .....  | P. 120 |
| UTS612E2S .....   | P. 24  | UTS6GN1412S .....   | P. 116 | UTS6JC14E15P .....  | P. 132 |
| UTS612E3P .....   | P. 48  | UTS6GN147S .....    | P. 92  | UTS6JC14E15S .....  | P. 132 |
| UTS612E3S .....   | P. 48  | UTS6JC102W2P .....  | P. 64  | UTS6JC14E18P .....  | P. 136 |
| UTS612E4P .....   | P. 52  | UTS6JC102W2S .....  | P. 64  | UTS6JC14E18S .....  | P. 136 |
| UTS612E4S .....   | P. 52  | UTS6JC103P .....    | P. 28  | UTS6JC14E19P .....  | P. 140 |
| UTS612E8P .....   | P. 104 | UTS6JC103S .....    | P. 28  | UTS6JC14E19S .....  | P. 140 |
| UTS612E8S .....   | P. 104 | UTS6JC103W3P .....  | P. 80  | UTS6JC14E5P .....   | P. 72  |
| UTS61412P .....   | P. 116 | UTS6JC103W3S .....  | P. 80  | UTS6JC14E5S .....   | P. 72  |
| UTS61412S .....   | P. 116 | UTS6JC104P .....    | P. 68  | UTS6JC14E7P .....   | P. 92  |
| UTS61419P .....   | P. 140 | UTS6JC104S .....    | P. 68  | UTS6JC14E7S .....   | P. 92  |
| UTS61419S .....   | P. 140 | UTS6JC106P .....    | P. 84  | UTS6JC1823P .....   | P. 144 |
| UTS6142G1P .....  | P. 32  | UTS6JC106S .....    | P. 84  | UTS6JC1823S .....   | P. 144 |
| UTS6142G1S .....  | P. 32  | UTS6JC10E6P .....   | P. 84  | UTS6JC1832P .....   | P. 148 |
| UTS6147P .....    | P. 92  | UTS6JC10E6S .....   | P. 84  | UTS6JC1832S .....   | P. 148 |
| UTS6147S .....    | P. 92  | UTS6JC10E7P .....   | P. 96  | UTS6JC183G1P .....  | P. 56  |
| UTS6148P .....    | P. 108 | UTS6JC10E7S .....   | P. 96  | UTS6JC18LCN .....   | P. 152 |
| UTS6148S .....    | P. 108 | UTS6JC10E98P .....  | P. 88  | UTS6JC18MPN .....   | P. 156 |
| UTS61492P .....   | P. 124 | UTS6JC10E98S .....  | P. 88  | UTS6JC18X2M3P ..... | P. 76  |
| UTS61492S .....   | P. 124 | UTS6JC1210P .....   | P. 112 | UTS6JC18X2M3S ..... | P. 76  |
| UTS614E12P .....  | P. 120 | UTS6JC1210S .....   | P. 112 | UTS6JC8E2P .....    | P. 20  |
| UTS614E12S .....  | P. 120 | UTS6JC124P .....    | P. 52  | UTS6JC8E2S .....    | P. 20  |
| UTS614E15P .....  | P. 132 | UTS6JC124PSCR ..... | P. 52  | UTS6JC8E33P .....   | P. 44  |
| UTS614E15S .....  | P. 132 | UTS6JC124S .....    | P. 52  | UTS6JC8E33S .....   | P. 44  |
| UTS614E18P .....  | P. 136 | UTS6JC124SSCR ..... | P. 52  | UTS6JC8E3AP .....   | P. 40  |
| UTS614E18S .....  | P. 136 | UTS6JC128P .....    | P. 100 | UTS6JC8E3AS .....   | P. 40  |
| UTS614E19P .....  | P. 140 | UTS6JC128S .....    | P. 100 | UTS6JC8E3P .....    | P. 36  |
| UTS614E19S .....  | P. 140 | UTS6JC12E10P .....  | P. 112 | UTS6JC8E3S .....    | P. 36  |
| UTS614E5P .....   | P. 72  | UTS6JC12E10S .....  | P. 112 | UTS6JC8E4P .....    | P. 60  |
| UTS614E5S .....   | P. 72  | UTS6JC12E14P .....  | P. 128 | UTS6JC8E4S .....    | P. 60  |
| UTS61823P .....   | P. 144 | UTS6JC12E14S .....  | P. 128 | UTS6JC8E98P .....   | P. 40  |
| UTS61823S .....   | P. 144 | UTS6JC12E2P .....   | P. 24  | UTS6JC8E98S .....   | P. 40  |
| UTS61832P .....   | P. 148 | UTS6JC12E2S .....   | P. 24  | UTS7102W2P .....    | P. 64  |
| UTS61832S .....   | P. 148 | UTS6JC12E3P .....   | P. 48  | UTS7102W2S .....    | P. 64  |
| UTS6183G1P .....  | P. 56  | UTS6JC12E3S .....   | P. 48  | UTS7103P .....      | P. 28  |
| UTS618X2M3P ..... | P. 76  | UTS6JC12E4P .....   | P. 52  | UTS7103S .....      | P. 28  |
| UTS618X2M3S ..... | P. 76  | UTS6JC12E4S .....   | P. 52  | UTS7103W3P .....    | P. 80  |
| UTS68E2P .....    | P. 20  | UTS6JC12E8P .....   | P. 104 | UTS7103W3S .....    | P. 80  |
| UTS68E2S .....    | P. 20  | UTS6JC12E8S .....   | P. 104 | UTS7104P .....      | P. 68  |
| UTS68E33P .....   | P. 44  | UTS6JC1412P .....   | P. 116 | UTS7104S .....      | P. 68  |
| UTS68E33S .....   | P. 44  | UTS6JC1412S .....   | P. 116 | UTS7106P .....      | P. 84  |
| UTS68E3AP .....   | P. 40  | UTS6JC1419P .....   | P. 140 | UTS7106S .....      | P. 84  |
| UTS68E3AS .....   | P. 40  | UTS6JC1419S .....   | P. 140 | UTS710D98P .....    | P. 88  |



|                      |        |                     |        |                     |        |
|----------------------|--------|---------------------|--------|---------------------|--------|
| UTS710D98P32 .....   | P. 88  | UTS712E10P.....     | P. 112 | UTS714E18P.....     | P. 136 |
| UTS710D98S .....     | P. 88  | UTS712E10S.....     | P. 112 | UTS714E18S.....     | P. 136 |
| UTS710D98S32 .....   | P. 88  | UTS712E14P.....     | P. 128 | UTS714E19P.....     | P. 140 |
| UTS710E6P.....       | P. 84  | UTS712E14S.....     | P. 128 | UTS714E19S.....     | P. 140 |
| UTS710E6S.....       | P. 84  | UTS712E2P.....      | P. 24  | UTS714E5P.....      | P. 72  |
| UTS710E6PM16.....    | P. 84  | UTS712E2S.....      | P. 24  | UTS714E5S.....      | P. 72  |
| UTS710E6SM16.....    | P. 84  | UTS712E3P.....      | P. 48  | UTS714E7P.....      | P. 92  |
| UTS710D7P.....       | P. 96  | UTS712E3S.....      | P. 48  | UTS714E7S.....      | P. 92  |
| UTS710D7P32 .....    | P. 96  | UTS712E4P.....      | P. 52  | UTS71823P.....      | P. 144 |
| UTS710D7S .....      | P. 96  | UTS712E4S.....      | P. 52  | UTS71823S.....      | P. 144 |
| UTS710D7S32 .....    | P. 96  | UTS712E8P.....      | P. 104 | UTS71832P.....      | P. 148 |
| UTS710E7P.....       | P. 96  | UTS712E8S.....      | P. 104 | UTS71832S.....      | P. 148 |
| UTS710E7S.....       | P. 96  | UTS71412P.....      | P. 116 | UTS7183G1SNPT ..... | P. 56  |
| UTS710E7PM16.....    | P. 96  | UTS71412S.....      | P. 116 | UTS718LCN.....      | P. 152 |
| UTS710E7SM16.....    | P. 96  | UTS71419P.....      | P. 140 | UTS718MPN.....      | P. 156 |
| UTS710E98P.....      | P. 88  | UTS71419S.....      | P. 140 | UTS718X2M3PNPT..... | P. 76  |
| UTS710E98S.....      | P. 88  | UTS7142G1P.....     | P. 32  | UTS718X2M3SNPT..... | P. 76  |
| UTS71210P.....       | P. 112 | UTS7142G1S.....     | P. 32  | UTS78D2P.....       | P. 20  |
| UTS71210S.....       | P. 112 | UTS7142G1SNPT ..... | P. 32  | UTS78D2P32 .....    | P. 20  |
| UTS7124P.....        | P. 52  | UTS7147P.....       | P. 92  | UTS78D2S.....       | P. 20  |
| UTS7124PSCR .....    | P. 52  | UTS7147PSCR .....   | P. 92  | UTS78D2S32 .....    | P. 20  |
| UTS7124S.....        | P. 52  | UTS7147PSEK9.....   | P. 92  | UTS78D33P.....      | P. 44  |
| UTS7124SSCR .....    | P. 52  | UTS7147S.....       | P. 92  | UTS78D33P32 .....   | P. 44  |
| UTS7128P.....        | P. 100 | UTS71492P.....      | P. 124 | UTS78D33S.....      | P. 44  |
| UTS7128PM20.....     | P. 100 | UTS71492S.....      | P. 124 | UTS78D33S32 .....   | P. 44  |
| UTS7128PM20NUT ..... | P. 100 | UTS7147SSCR .....   | P. 92  | UTS78D3AP.....      | P. 40  |
| UTS7128PSEK9.....    | P. 100 | UTS714D7P.....      | P. 92  | UTS78D3AP32.....    | P. 40  |
| UTS7128S.....        | P. 100 | UTS714D7P32 .....   | P. 92  | UTS78D3AS.....      | P. 40  |
| UTS7128SM20.....     | P. 100 | UTS714D7S.....      | P. 92  | UTS78D3AS32 .....   | P. 40  |
| UTS7128SM20NUT ..... | P. 100 | UTS714D7S32 .....   | P. 92  | UTS78D3P.....       | P. 36  |
| UTS712D10P .....     | P. 112 | UTS714D12P.....     | P. 120 | UTS78D3P32 .....    | P. 36  |
| UTS712D10P32 .....   | P. 112 | UTS714D12P32 .....  | P. 120 | UTS78D3S.....       | P. 36  |
| UTS712D10S.....      | P. 112 | UTS714D12S.....     | P. 120 | UTS78D3S32 .....    | P. 36  |
| UTS712D10S32 .....   | P. 112 | UTS714D12S32 .....  | P. 120 | UTS78D4P.....       | P. 60  |
| UTS712D14P.....      | P. 128 | UTS714D15P.....     | P. 132 | UTS78D4P32 .....    | P. 60  |
| UTS712D14P32 .....   | P. 128 | UTS714D15P32 .....  | P. 132 | UTS78D4S.....       | P. 60  |
| UTS712D14S.....      | P. 128 | UTS714D15S.....     | P. 132 | UTS78D4S32 .....    | P. 60  |
| UTS712D14S32 .....   | P. 128 | UTS714D15S32 .....  | P. 132 | UTS78D98P.....      | P. 40  |
| UTS712D2P.....       | P. 24  | UTS714D18P.....     | P. 136 | UTS78D98P32 .....   | P. 40  |
| UTS712D2P32 .....    | P. 24  | UTS714D18P32 .....  | P. 136 | UTS78D98S.....      | P. 40  |
| UTS712D2S.....       | P. 24  | UTS714D18S.....     | P. 136 | UTS78D98S32 .....   | P. 40  |
| UTS712D2S32 .....    | P. 24  | UTS714D18S32 .....  | P. 136 | UTS78E2P.....       | P. 20  |
| UTS712D3P.....       | P. 48  | UTS714D19P.....     | P. 140 | UTS78E2S.....       | P. 20  |
| UTS712D3P32 .....    | P. 48  | UTS714D19P32 .....  | P. 140 | UTS78E33P.....      | P. 44  |
| UTS712D3S.....       | P. 48  | UTS714D19S.....     | P. 140 | UTS78E33S.....      | P. 44  |
| UTS712D3S32 .....    | P. 48  | UTS714D19S32 .....  | P. 140 | UTS78E3AP.....      | P. 40  |
| UTS712D4P.....       | P. 52  | UTS714D5P.....      | P. 72  | UTS78E3AS.....      | P. 40  |
| UTS712D4P32 .....    | P. 52  | UTS714D5P32 .....   | P. 72  | UTS78E3P.....       | P. 36  |
| UTS712D4S.....       | P. 52  | UTS714D5S.....      | P. 72  | UTS78E3S.....       | P. 36  |
| UTS712D4S32 .....    | P. 52  | UTS714D5S32 .....   | P. 72  | UTS78E4P.....       | P. 60  |
| UTS712D8P.....       | P. 104 | UTS714E12P.....     | P. 120 | UTS78E4S.....       | P. 60  |
| UTS712D8P32 .....    | P. 104 | UTS714E12S.....     | P. 120 | UTS78E98P.....      | P. 40  |
| UTS712D8S.....       | P. 104 | UTS714E15P.....     | P. 132 | UTS78E98S.....      | P. 40  |
| UTS712D8S32 .....    | P. 104 | UTS714E15S.....     | P. 125 | UTS7GJC104P.....    | P. 68  |

## Part Number Index (Continued)

|                    |        |
|--------------------|--------|
| UTS7GJC128P .....  | P. 100 |
| UTS7GJC1412P ..... | P. 116 |
| UTS7GJC147P .....  | P. 92  |
| UTS7GN104P .....   | P. 68  |
| UTS7GN128P .....   | P. 100 |
| UTS7GN1412P .....  | P. 116 |
| UTS7GN147P .....   | P. 92  |

### Overmolded Cable Assemblies

|                           |        |
|---------------------------|--------|
| UTS6V0V104P03FT00 .....   | P. 68  |
| UTS6V0V104PS03FT00 .....  | P. 68  |
| UTS6V0V104SS03FT00.....   | P. 68  |
| UTS6V0V104SST100.....     | P. 68  |
| UTS6V0V128P03FT00 .....   | P. 100 |
| UTS6V0V128PS03FT00 .....  | P. 100 |
| UTS6V0V128SS03FT00.....   | P. 100 |
| UTS6V0V128SST100.....     | P. 100 |
| UTS6V0V1412P03FT00 .....  | P. 116 |
| UTS6V0V1412PS03FT00 ..... | P. 116 |
| UTS6V0V1412SS03FT00.....  | P. 116 |
| UTS6V0V1412SST100.....    | P. 116 |

### Accessories

|                  |        |
|------------------|--------|
| 85005585A .....  | P. 22  |
| 85005586A .....  | P. 30  |
| 85005587A .....  | P. 26  |
| 85005588A .....  | P. 34  |
| 85005590A .....  | P. 58  |
| 85005594.....    | P. 22  |
| 85005595.....    | P. 30  |
| 85005596.....    | P. 26  |
| 85005597.....    | P. 34  |
| 85005599.....    | P. 58  |
| UTS18DCG2 .....  | P. 154 |
| UTS610CCRG ..... | P. 30  |
| UTS610CCRR.....  | P. 30  |
| UTS610CCRY ..... | P. 30  |
| UTS612CCRG ..... | P. 26  |
| UTS612CCRR.....  | P. 26  |
| UTS612CCRY ..... | P. 26  |
| UTS614CCRG ..... | P. 34  |
| UTS614CCRR.....  | P. 34  |
| UTS614CCRY ..... | P. 34  |
| UTS618CCRG ..... | P. 58  |
| UTS618CCRR.....  | P. 58  |
| UTS618CCRY ..... | P. 58  |
| UTFD11B .....    | P. 22  |
| UTFD12B .....    | P. 30  |
| UTFD13B .....    | P. 26  |
| UTFD14B .....    | P. 34  |
| UTFD16B .....    | P. 58  |
| UTS10DCG .....   | P. 30  |
| UTS10DCGE .....  | P. 70  |
| UTS10DCGR.....   | P. 30  |

|                  |        |
|------------------|--------|
| UTS12DCG .....   | P. 26  |
| UTS12DCGE.....   | P. 26  |
| UTS12DCGR.....   | P. 26  |
| UTS14DCG .....   | P. 34  |
| UTS14DCGE.....   | P. 74  |
| UTS14DCGR.....   | P. 34  |
| UTS18DCG .....   | P. 58  |
| UTS18DCGE.....   | P. 146 |
| UTS18DCGR.....   | P. 58  |
| UTS610DCG .....  | P. 30  |
| UTS612DCG .....  | P. 26  |
| UTS614DCG .....  | P. 34  |
| UTS618DCG .....  | P. 58  |
| UTS618DCG2.....  | P. 154 |
| UTS68C .....     | P. 22  |
| UTS68CCRG .....  | P. 22  |
| UTS68CCRR.....   | P. 22  |
| UTS68CCRY.....   | P. 22  |
| UTS710CCRG ..... | P. 30  |
| UTS710CCRR.....  | P. 30  |
| UTS710CCRY.....  | P. 30  |
| UTS712CCRG ..... | P. 26  |
| UTS712CCRR.....  | P. 26  |
| UTS712CCRY.....  | P. 26  |
| UTS714CCRG ..... | P. 34  |
| UTS714CCRR.....  | P. 34  |
| UTS714CCRY.....  | P. 34  |
| UTS718CCRG ..... | P. 58  |
| UTS718CCRR.....  | P. 58  |
| UTS718CCRY.....  | P. 58  |
| UTS78CCRG .....  | P. 22  |
| UTS78CCRR.....   | P. 22  |
| UTS78CCRY.....   | P. 22  |
| UTS8DCGE .....   | P. 22  |
| UTS8DCGR.....    | P. 22  |

### Contacts

|                  |        |
|------------------|--------|
| 82911456A .....  | P. 165 |
| 82911456K .....  | P. 165 |
| 82911457NA ..... | P. 165 |
| 82911457NK ..... | P. 165 |
| 82911458A .....  | P. 165 |
| 82911458K .....  | P. 165 |
| 82911459NA ..... | P. 165 |
| 82911459NK ..... | P. 165 |
| 82911460A .....  | P. 165 |
| 82911460K .....  | P. 165 |
| 82911461NA ..... | P. 165 |
| 82911461NK ..... | P. 165 |
| 82911462A .....  | P. 165 |
| 82911462K .....  | P. 165 |
| 82911463NA ..... | P. 165 |
| 82911463NK ..... | P. 165 |
| 82911464A .....  | P. 165 |

|                   |        |
|-------------------|--------|
| 82911464K .....   | P. 165 |
| 82911465NA .....  | P. 165 |
| 82911465NK .....  | P. 165 |
| 82911466A .....   | P. 165 |
| 82911466K .....   | P. 165 |
| 82911467NA .....  | P. 165 |
| 82911467NK .....  | P. 165 |
| 82911684NPC ..... | P. 168 |
| 82911685NPC ..... | P. 168 |
| 82913600A .....   | P. 165 |
| 82913601A .....   | P. 165 |
| 82913602A .....   | P. 165 |
| 82913603A .....   | P. 165 |
| 82913604A .....   | P. 165 |
| 82913605A .....   | P. 165 |
| 82913606A .....   | P. 165 |
| 82913607A .....   | P. 165 |
| 82913608A .....   | P. 165 |
| 82913609A .....   | P. 165 |
| RC14M30GE7K ..... | P. 166 |
| RC14M30J .....    | P. 165 |
| RC14M30K .....    | P. 165 |
| RC16M23GE7K ..... | P. 166 |
| RC16M23J .....    | P. 165 |
| RC16M23K .....    | P. 165 |
| RC18W3K .....     | P. 165 |
| RC20M12E83K ..... | P. 168 |
| RC20M12E84K ..... | P. 168 |
| RC20M12E85K ..... | P. 168 |
| RC20M12E86K ..... | P. 168 |
| RC20M12E87K ..... | P. 168 |
| RC20M12E8K .....  | P. 168 |
| RC20M12GE7K ..... | P. 166 |
| RC20M12K .....    | P. 165 |
| RC20M13GE7K ..... | P. 166 |
| RC20M13K .....    | P. 165 |
| RC20W3K .....     | P. 165 |
| RC24M9GE7K .....  | P. 166 |
| RC24M9K .....     | P. 165 |
| RC24W3K .....     | P. 165 |
| RC28M1GE7K .....  | P. 166 |
| RC28M1K .....     | P. 165 |
| RCDX6015D28 ..... | P. 201 |
| RCDX6016D28 ..... | P. 200 |
| RCDX6018D28 ..... | P. 200 |
| RCDX6019D28 ..... | P. 201 |
| RCDX6024D28 ..... | P. 200 |
| RCDX6026D28 ..... | P. 200 |
| RCDX602D28 .....  | P. 205 |
| RCDX6031D28 ..... | P. 201 |
| RCDX6032D28 ..... | P. 200 |
| RCDX6034D28 ..... | P. 200 |
| RCDX6036D28 ..... | P. 200 |
| RCDX6052D28 ..... | P. 200 |

|                  |        |                   |        |                  |        |
|------------------|--------|-------------------|--------|------------------|--------|
| RCDXB0553.....   | P. 205 | SC16M1TK6 .....   | P. 165 | SM20WL3TK6.....  | P. 165 |
| RCDXK1D28 .....  | P. 200 | SC16ML11S18 ..... | P. 165 | SM24M1S18 .....  | P. 165 |
| RCPOF1000B.....  | P. 171 | SC16ML11S31 ..... | P. 165 | SM24M1S31 .....  | P. 165 |
| RCW5016K .....   | P. 168 | SC16ML11TK6.....  | P. 165 | SM24M1TK6.....   | P. 165 |
| RCW50A7K.....    | P. 168 | SC16ML1S18 .....  | P. 165 | SM24ML1S18 ..... | P. 165 |
| RFD26L1D28 ..... | P. 204 | SC16ML1S31 .....  | P. 165 | SM24ML1S31 ..... | P. 165 |
| RM14M30GE1K..... | P. 166 | SC16ML1TK6.....   | P. 165 | SM24ML1TK6.....  | P. 165 |
| RM14M30K.....    | P. 165 | SC20M1S18.....    | P. 165 | SM24W3S26.....   | P. 165 |
| RM16M23GE1K..... | P. 166 | SC20M1S31.....    | P. 165 | SM24W3TK6.....   | P. 165 |
| RM16M23K.....    | P. 165 | SC20M1TK6 .....   | P. 165 | SM24WL3S26 ..... | P. 165 |
| RM18W3K.....     | P. 165 | SC20ML1S18 .....  | P. 165 | SM24WL3TK6.....  | P. 165 |
| RM20M12E83K..... | P. 168 | SC20ML1S31 .....  | P. 165 |                  |        |
| RM20M12E84K..... | P. 168 | SC20ML1TK6.....   | P. 165 | <b>Tooling</b>   |        |
| RM20M12E8K.....  | P. 168 | SC20W3S25.....    | P. 165 | 51060210924..... | P. 179 |
| RM20M12GE1K..... | P. 166 | SC20W3TK6 .....   | P. 165 | 51060210936..... | P. 179 |
| RM20M12K.....    | P. 165 | SC20WL3S25.....   | P. 165 | M10S1J.....      | P. 202 |
| RM20M13GE1K..... | P. 166 | SC20WL3TK6 .....  | P. 165 | M10SG8.....      | P. 203 |
| RM20M13K.....    | P. 165 | SC24M1S18.....    | P. 165 | M317 .....       | P. 179 |
| RM20W3K.....     | P. 165 | SC24M1S31.....    | P. 165 | MH860.....       | P. 179 |
| RM24M9GE1K.....  | P. 166 | SC24M1TK6 .....   | P. 165 | MH86164G.....    | P. 179 |
| RM24M9K.....     | P. 165 | SC24ML1S18.....   | P. 165 | MH86186.....     | P. 179 |
| RM24W3K.....     | P. 165 | SC24ML1S31 .....  | P. 165 | RXTM205.....     | P. 179 |
| RM28M1GE1K.....  | P. 166 | SC24ML1TK6.....   | P. 165 | RX2025GE1 .....  | P. 179 |
| RM28M1J .....    | P. 165 | SC24W3S25.....    | P. 165 | RX20D44 .....    | P. 179 |
| RM28M1K.....     | P. 165 | SC24W3TK6 .....   | P. 165 | S16RCM14.....    | P. 175 |
| RMD26L1D28 ..... | P. 205 | SC24WL3S25.....   | P. 165 | S16RCM16.....    | P. 175 |
| RMDX6015D28..... | P. 201 | SC24WL3TK6 .....  | P. 165 | S16RCM20.....    | P. 175 |
| RMDX6018D28..... | P. 200 | SM14M1S18 .....   | P. 165 | S16SCM20.....    | P. 175 |
| RMDX6019D28..... | P. 201 | SM14M1S31 .....   | P. 165 | S16SCML1 .....   | P. 175 |
| RMDX6024D28..... | P. 200 | SM14M1TK6.....    | P. 165 | S16SCML11 .....  | P. 175 |
| RMDX6026D28..... | P. 200 | SM14ML1S18 .....  | P. 165 | S20RCM.....      | P. 175 |
| RMDX602D28.....  | P. 204 | SM14ML1S31 .....  | P. 165 | S20SCM20.....    | P. 175 |
| RMDX6031D28..... | P. 201 | SM14ML1TK6.....   | P. 165 | S221.....        | P. 204 |
| RMDX6032D28..... | P. 200 | SM16M11S18.....   | P. 165 | S23D2 .....      | P. 204 |
| RMDX6034D28..... | P. 200 | SM16M11S31 .....  | P. 165 | S26D2 .....      | P. 204 |
| RMDX6036D28..... | P. 200 | SM16M11TK6.....   | P. 165 | S80.....         | P. 203 |
| RMDX6050D28..... | P. 200 | SM16M1S18.....    | P. 165 | S82.....         | P. 206 |
| RMDX6052D28..... | P. 200 | SM16M1S31 .....   | P. 165 | S83.....         | P. 203 |
| RMDXB0553 .....  | P. 204 | SM16M1TK6.....    | P. 165 | S87.....         | P. 206 |
| RMDXK10D28 ..... | P. 200 | SM16ML11S18 ..... | P. 165 | S88.....         | P. 206 |
| RMPOF1000 .....  | P. 171 | SM16ML11S31 ..... | P. 165 | SHANDLES .....   | P. 175 |
| RMW5016K.....    | P. 168 | SM16ML11TK6 ..... | P. 165 | SL105.....       | P. 203 |
| RMW50A7K.....    | P. 168 | SM16ML1S18 .....  | P. 165 | SL46D2 .....     | P. 204 |
| SC14M1S18.....   | P. 165 | SM16ML1S31 .....  | P. 165 | SL471 .....      | P. 204 |
| SC14M1S31 .....  | P. 165 | SM16ML1TK6.....   | P. 165 | UH25 .....       | P. 175 |
| SC14M1TK6 .....  | P. 165 | SM20M1S18.....    | P. 165 | VGE10077A.....   | P. 175 |
| SC14ML1S18.....  | P. 165 | SM20M1S31 .....   | P. 165 | VGE10078A.....   | P. 175 |
| SC14ML1S31 ..... | P. 165 | SM20M1TK6.....    | P. 165 |                  |        |
| SC14ML1TK6.....  | P. 165 | SM20ML1S18 .....  | P. 165 |                  |        |
| SC16M11S18.....  | P. 165 | SM20ML1S31 .....  | P. 165 |                  |        |
| SC16M11S31.....  | P. 165 | SM20ML1TK6.....   | P. 165 |                  |        |
| SC16M11TK6 ..... | P. 165 | SM20W3S26.....    | P. 165 |                  |        |
| SC16M1S18.....   | P. 165 | SM20W3TK6.....    | P. 165 |                  |        |
| SC16M1S31.....   | P. 165 | SM20WL3S26 .....  | P. 165 |                  |        |

## Notes



# Reliable People, Reliable Solutions



Your local contact



Our contribution to environmental protection:  
This catalog is printed on PEFC certified paper  
Advancement of sustainable wood cultivation. [www.pefc.org](http://www.pefc.org)

# SOURIAU

[www.souriau-industrial.com](http://www.souriau-industrial.com)  
[technicalsupport@souriau.com](mailto:technicalsupport@souriau.com)

**Esterline**  
Connection Technologies