


P1: M-A21A

P2: M-A22A

Customer No.: NO.1

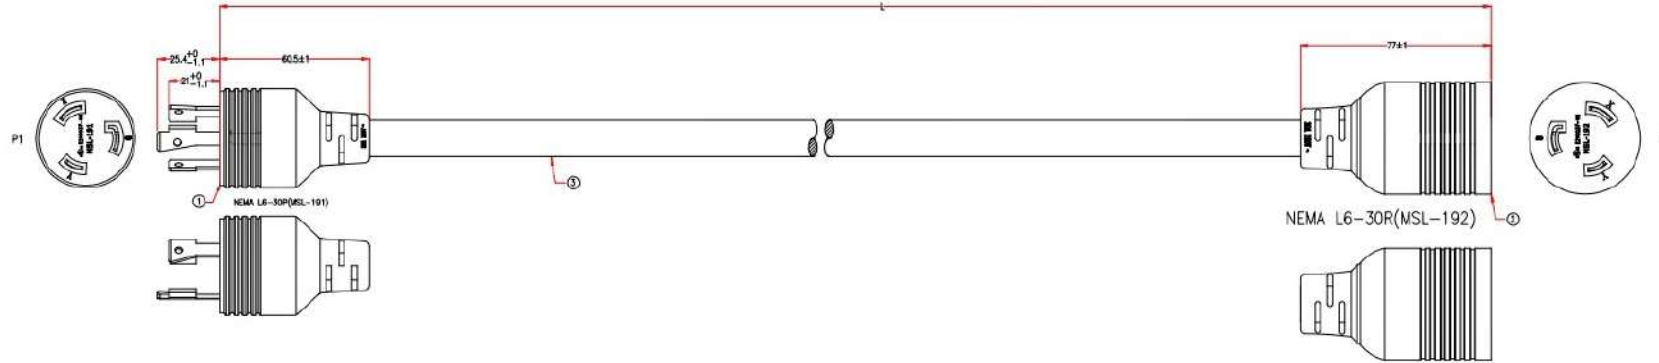


P/N.	LENGTH(L,mm)	CASE PACK QTY
AC-L630PR-06	1830mm	40PCS
AC-L630PR-08	2440mm	30PCS
AC-L630PR-10	3050mm	25PCS
AC-L630PR-15	4570mm	15PCS
AC-L630PR-25	7620mm	8PCS

PACKING A: <1FT

PACKING B: <2FT

PACKING C: >2FT



P1: cULUS E210337-VN

P2: cULUS E210337-VN

MARKING: (UL) SJTW 3/C 10AWG(5.26MM²) VW-1 105°C 300V E204978 C (UL)

SJTW 3/C 5.26MM²(10AWG) FT2 105°C 300V E204978 MSL

191192B3F10A(FP593-00)	
P1	P2
BLACK Y _____ Y	
WHITE X _____ X	
GREEN G _____ G	

* NOTE: ALL relevant materials are complied with RoHS directive.
THE MARKING IS CONCAVE LETTERING MOULD

3	UL SJTW 10AWG*3C OD 14.6mm, JACKET BLACK, DRAWING No. EPSJT011003C-202	H5TC60-0304K09	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: HC-05200-08AW0(NEMAL6-30R)	A1QC68-0406K09	1	M406
	TERMINAL: 95757BS-0	A1RT16-0257	2	M257
	TERMINAL: 95758BS-0(G)	A1RT18-0257	1	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YST-FB-6-30P(NEMAL6-30P)	A1QC78-0767	1	M767
	TERMINAL: 95657	A1RQ34-0257	1	M257
	TERMINAL: 95658	A1RQ35-0257	1	M257
	TERMINAL: 95659	A1RQ36-0257	1	M257

No.	DESCRIPTION		Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501 ~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DESIGNER	XJW			
DRAWING	WEI			
DATE	24/SEP/24			
ITEM NO.	AC-L630PR-XX		UNIT:mm	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm