


Specifications

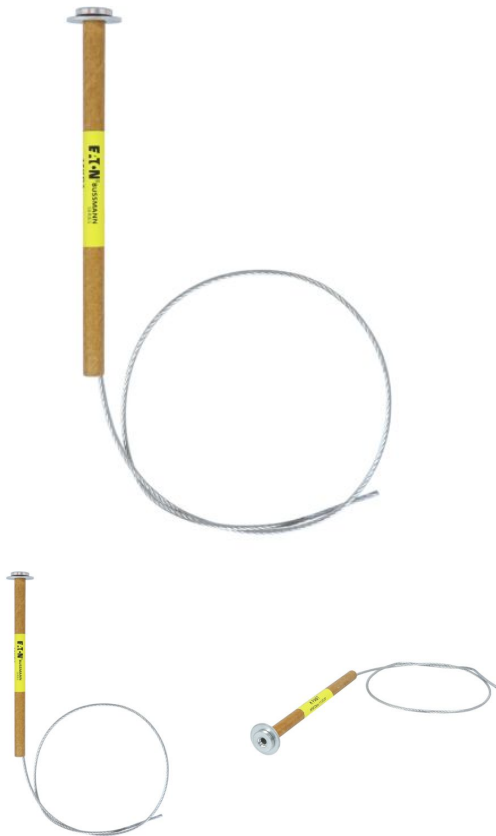

Eaton 15KB3

Expulsion fuse-link, medium voltage, 3 A, AC 15 kV, 533 mm, ANSI, K fast, style B termination

General specifications

PRODUCT NAME	Eaton Bussmann series medium voltage expulsion fuse
CATALOG NUMBER	15KB3
EAN	5027590435246
PRODUCT LENGTH/DEPTH	225 mm
PRODUCT HEIGHT	76 mm
PRODUCT WIDTH	106 mm
PRODUCT WEIGHT	18.96 g
COMPLIANCES	ANSI C37.42
GLOBAL CATALOG	15KB3



Powering Business Worldwide

Product specifications

AMPERAGE RATING	3 A
CURRENT CHARACTERISTIC TYPE	Type K - Complies with ANSI C 37-42 requirements for fast acting K Characteristics
RATED FREQUENCY - MAX	60 Hz
RATED FREQUENCY - MIN	50 Hz
RELEASE CHARACTERISTIC	K
STANDARD	ANSI
TYPE OF TERMINATION	Fixed buttonhead
VOLTAGE TYPE	AC
COLOR	Yellow
INTERRUPT RATING	8 kAIC
CONSTRUCTION SIZE	533 mm
VOLTAGE RATING	15 kV
TYPE	Medium Voltage Expulsion Fuse Link
APPLICATION	Primary side transformer protection, feeder protection, capacitor bank protection

Resources

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.

