


Specifications

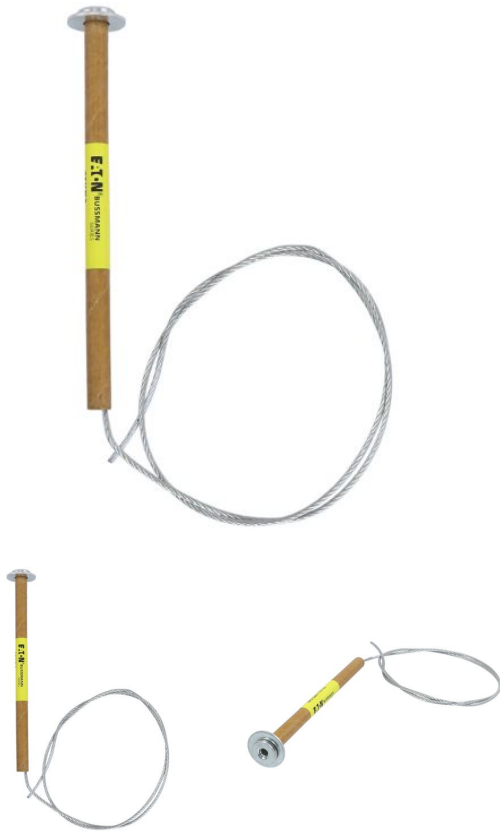

Eaton 25KB3

Expulsion fuse-link, medium voltage, 3 A, AC 25 kV, 660 mm, ANSI, K fast, style B termination

General specifications

PRODUCT NAME	Eaton Bussmann series medium voltage expulsion fuse
CATALOG NUMBER	25KB3
UPC	051712398596
EAN	5027590470285
PRODUCT LENGTH/DEPTH	225 mm
PRODUCT HEIGHT	76 mm
PRODUCT WIDTH	106 mm
PRODUCT WEIGHT	17.52 g
CERTIFICATIONS	ANSI/IEEE Std C37.42
GLOBAL CATALOG	25KB3



Powering Business Worldwide

Product specifications

AMPERAGE RATING	3 A
CURRENT CHARACTERISTIC TYPE	Type K - Complies with ANSI C 37-42 requirements for fast acting K Characteristics
RATED FREQUENCY - MAX	60 Hz
RATED FREQUENCY - MIN	50 Hz
RELEASE CHARACTERISTIC	K
STANDARD	ANSI
TYPE OF TERMINATION	Fixed buttonhead
VOLTAGE TYPE	AC
COLOR	Yellow
INTERRUPT RATING	8 kAIC
CONSTRUCTION SIZE	660 mm
VOLTAGE RATING	25 kV
TYPE	Medium Voltage Expulsion Fuse Link
APPLICATION	Primary side transformer protection, feeder protection, capacitor bank protection

Resources

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. All Rights Reserved.