



Main Product Characteristics

$V_{(BR)DSS}$	800V
$R_{DS(ON)}$	0.28Ω (max.)
I_D	17A



TO-220F

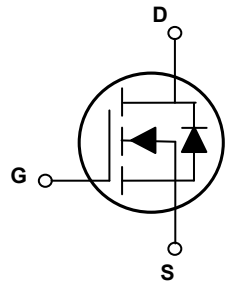

Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The GSFU80R280 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings (T_C=25°C unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V _{DS}	800	V
Gate-Source Voltage	V _{GS}	±30	V
Drain Current-Continuous, at Steady-State, (T _C =25°C)	I _D	17	A
Drain Current-Continuous, at Steady-State, (T _C =100°C)		7.6	
Drain Current-Pulsed	I _{DM}	68	A
Single Pulse Avalanche Energy ¹	E _{AS}	857	mJ
Power Dissipation (T _C =25°C)	P _D	42	W
Power Dissipation – Derate above 25°C		0.34	
Body Diode Reverse Voltage Slope ²	dv/dt	50	V/ns
MOS dv/dt Ruggedness ³	dv/dt	100	V/ns
Junction-to-Ambient (PCB Mounted, Steady-State)	R _{θJA}	62.5	°C/W
Thermal Resistance, Junction-to-Case	R _{θJC}	3.0	°C/W
Operating Junction Temperature Range	T _J	-55 To +150	°C
Storage Temperature Range	T _{STG}	-55 To +150	°C

Electrical Characteristics ($T_C=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	800	-	-	V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=800V, V_{GS}=0V$	-	-	1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	± 100	nA
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=8.0A$	-	0.24	0.28	Ω
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	2.4	-	4.6	V
Dynamic and Switching Characteristics						
Total Gate Charge ^{4,5}	Q_g	$V_{DD}=640V, I_D=17A, V_{GS}=10V$	-	44	-	nC
Gate-Source Charge ^{4,5}	Q_{gs}		-	14	-	
Gate-Drain ("Miller") Charge ^{4,5}	Q_{gd}		-	17	-	
Turn-On Delay Time ^{4,5}	$t_{d(on)}$	$V_{DD}=400V, R_G=25\Omega, V_{GS}=10V, I_D=17A$	-	31	-	nS
Rise Time ^{4,5}	t_r		-	78	-	
Turn-Off Delay Time ^{4,5}	$t_{d(off)}$		-	100	-	
Fall Time ^{4,5}	t_f		-	42	-	
Input Capacitance	C_{iss}	$V_{DS}=100V, V_{GS}=0V, F=1MHz$	-	1170	-	pF
Output Capacitance	C_{oss}		-	47	-	
Reverse Transfer Capacitance	C_{rss}		-	2.2	-	
Gate Resistance	R_g	$F=1MHz$	-	2.8	-	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current (Body Diode)	I_S	$T_C=25^\circ\text{C}$, MOSFET symbol showing the integral reverse p-n junction diode.	-	-	17	A
Pulsed Source Current	I_{SM}		-	-	68	A
Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=17A$	-	1.1	1.4	V
Reverse Recovery Time ²	t_{rr}	$V_{GS}=0V, I_F=17A, di_F/dt=100A/\mu s$	-	414	-	nS
Reverse Recovery Charge ²	Q_{rr}		-	6.2	-	μC

Note:

1. $L=79mH, I_{AS}=4.4A, V_{DD}=100V, R_g=25\Omega$, starting temperature $T_J=25^\circ\text{C}$.
2. $V_{DS}=0-400V, I_{SD}\leq I_S, T_J=25^\circ\text{C}$.
3. $V_{DS}=0-480V$.
4. Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
5. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

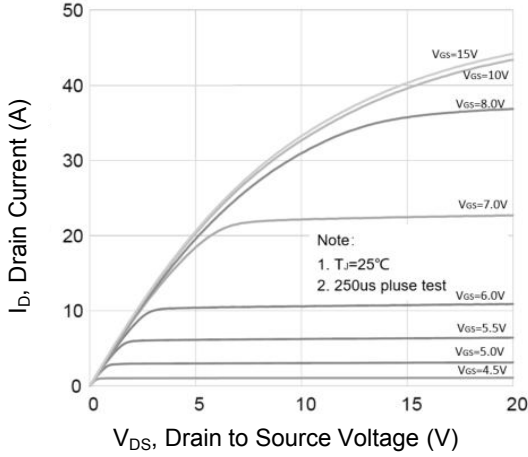


Figure 1. Typical Output Characteristics

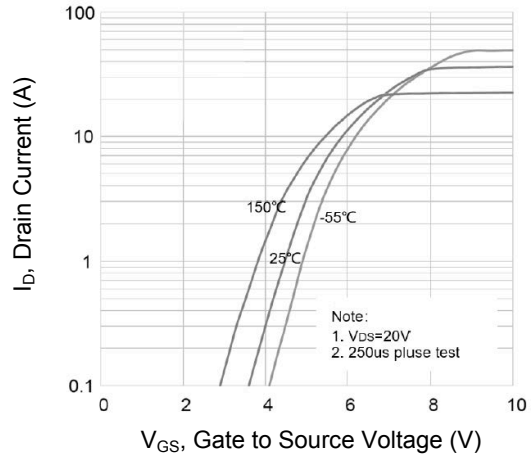


Figure 2. Transfer Characteristics

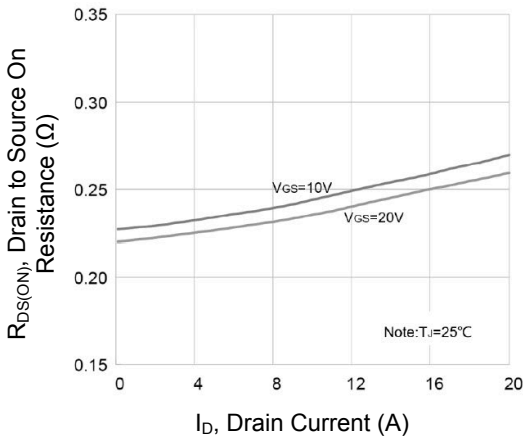


Figure 3. $R_{DS(ON)}$ vs. Drain Current

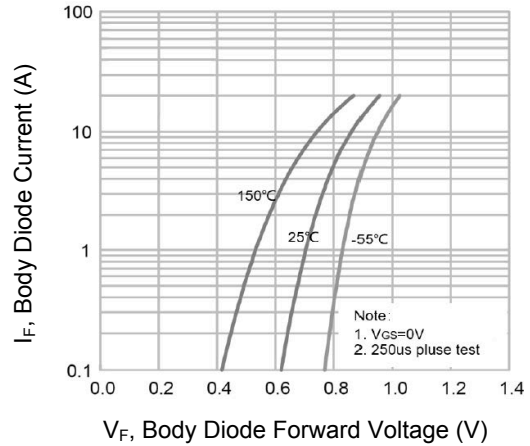


Figure 4. Body Diode Characteristics

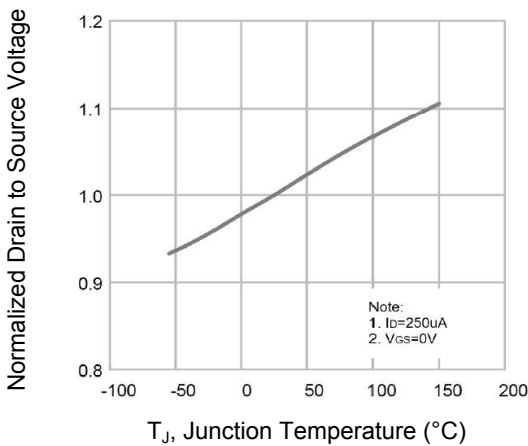


Figure 5. Normalized BV_{DSS} vs. Junction Temperature

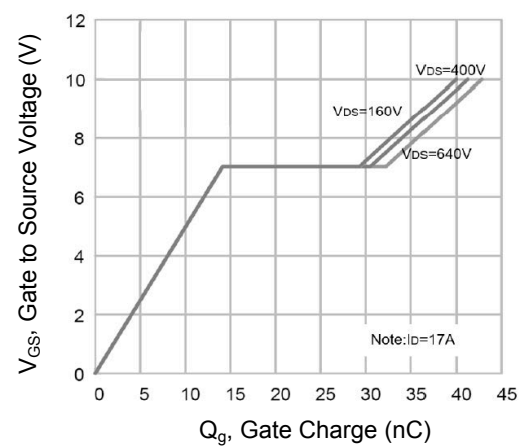


Figure 6. Gate Charge Characteristics

Typical Electrical and Thermal Characteristic Curves

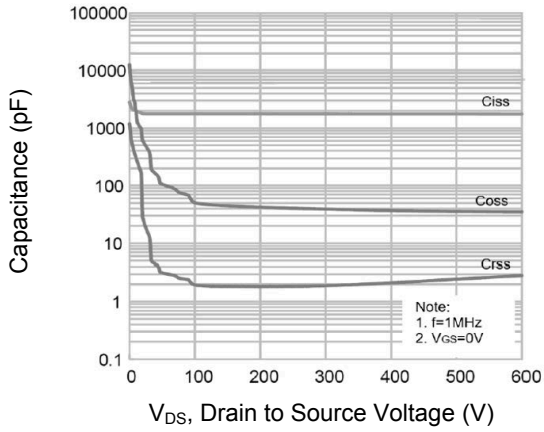


Figure 7. Capacitance Characteristics

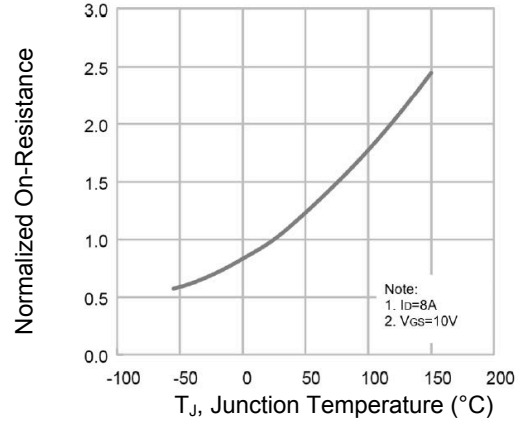


Figure 8. Normalized $R_{DS(ON)}$ vs. T_J


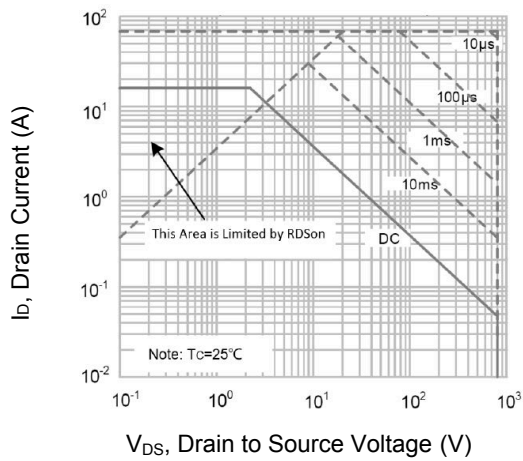


Figure 9. Safe Operation Area

Package Outline Dimensions (TO-220F)

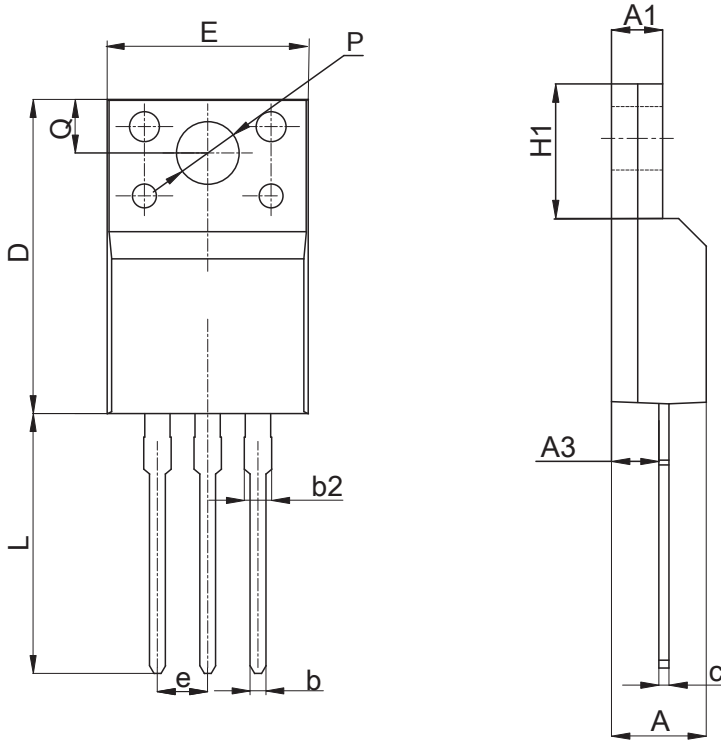

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.42	5.02	0.174	0.198
A1	2.30	2.83	0.091	0.111
A3	2.15	3.10	0.085	0.122
b	0.55	0.85	0.022	0.033
b2	0.96	1.46	0.038	0.057
c	0.35	0.65	0.014	0.026
D	15.25	16.25	0.600	0.640
E	9.73	10.50	0.383	0.413
e	2.50	2.60	0.098	0.102
H1	6.40	6.70	0.252	0.264
L	12.48	13.70	0.491	0.539
P	3.00	3.60	0.118	0.142
Q	3.05	3.60	0.120	0.142

Order Information

Device	Package	Marking	Carrier	Quantity
GSFU80R280	TO-220F	U80R280	Tube	50 pcs / Tube

For more information, please contact us at: inquiry@goodarksemi.com