

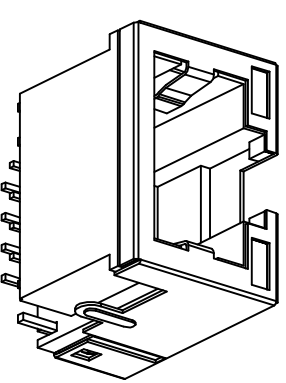
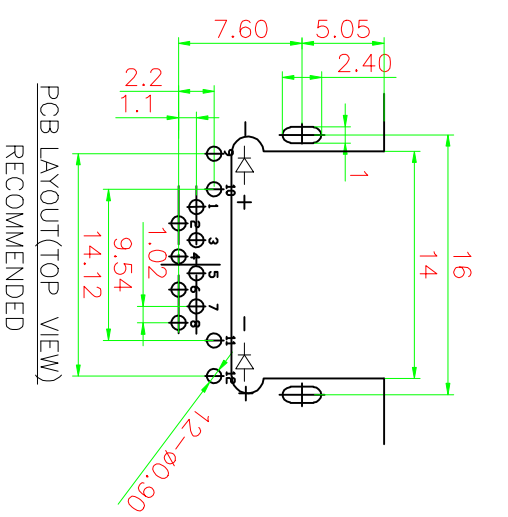
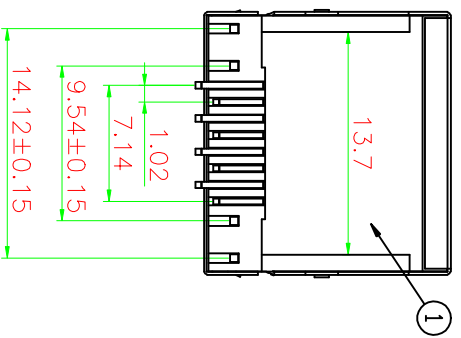


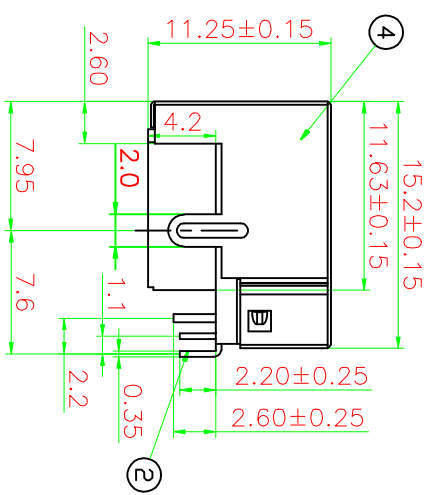

1 2 3 4 5 6 7 8 9 10 11



**General Specification**  
 Current Rating: 1.5A DC /Contact, 20mA DC for LED signals  
 Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals  
 Operating Environment  
 Standard Temperature: -20°C~+70°C  
 Industrial Temperature: -40°C~+85°C  
 Humidity: 20~70%  
 Contact Resistance:  $\leq 30m\Omega$   
 Insulation Resistance:  $\geq 500M\Omega$   
 Dielectric Strength: 500V AC/(50HZ)/Min  
 Mating And Unmating Force: 3~20N  
 Durability: 750 Cycles Min

**Material Specification**  
 Housing: Thermo-plastic, UL94V-0.  
 Contact: Alloy Copper  
 Shield: Alloy Copper  
 Please refer to the customer drawing when customer has specified

网络插座外形图

绘图: 吴鹏飞 日期: 2022.12.26  
 审核: 陈伟 日期:  
 核准: 陈伟 日期:

变更单号: 该图面供温州瑞川电子有限公司内部使用,不得私自复印

更改履历: 新出版发行

序号	名称	材料	数量	镀层/颜色	备注
4	外壳	PP2	1	NI	
3	LED灯	树脂/FE	2	NI/AG	
2	插针	PHOSPHOR BRONZE	8	10 $\mu$	
1	塑座	LCP	1	YELLOW	

**温州瑞川电子有限公司**  
 WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

一般公差	品名	规格	图号
30~	RCH-SP-32(带灯无弹) 黄绿 正负	RJ45	
10~30	料号: SP32-8TGG2001L722 (RC01561)		
±0.25	型号: RJ45		
±0.30	单位:mm		
±0.15	比例: 1:1		
±0.1	纸张: A4		

变更履历: 新出版发行

变更单号	日期	变更原因
1		新出版发行

该图面供温州瑞川电子有限公司内部使用,不得私自复印