



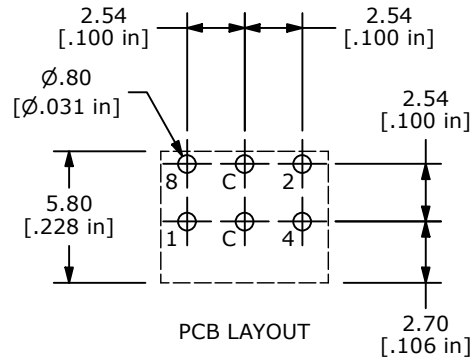


REAL CODE									
	C	1	2	4	8				
0	●								0
1	●	●							1
2	●		●						2
3	●	●	●						3
4	●			●					4
5	●	●		●					5
6	●		●	●					6
7	●	●	●	●					7
8	●				●				8
9	●	●			●				9
10			●		●	A			A
11	●	●			●	B			B
12	●			●	●	C			C
13	●		●	●	●	D			D
14	●	●	●	●	●	E			E
15	●	●	●	●	●	F			F

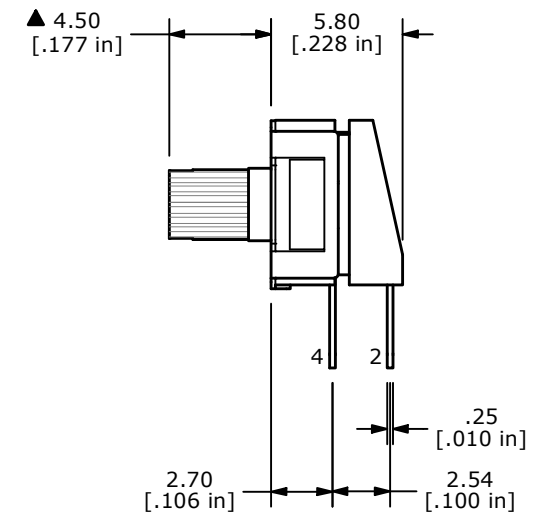

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REFERENCE ONLY
- OPERATING FORCE: 250gf MAX.
- CONTACT RATING: 100mA, 42V DC (SWITCHING)
400mA, 42V DC (NON-SWITCHING)
- CONTACT RESISTANCE: 80m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN @ 250VDC
- DIELECTRIC STRENGTH: 250VAC 1 MIN.
- LIFE: 25,000 STEPS
- OPERATING TEMPERATURE: -60°C to 125°C
- ▲ 11. PACKAGING: 65 PCS TUBE
12. IP RATING: IP67
- ▲ 13. ▲ DENOTES CRITICAL PARAMETER

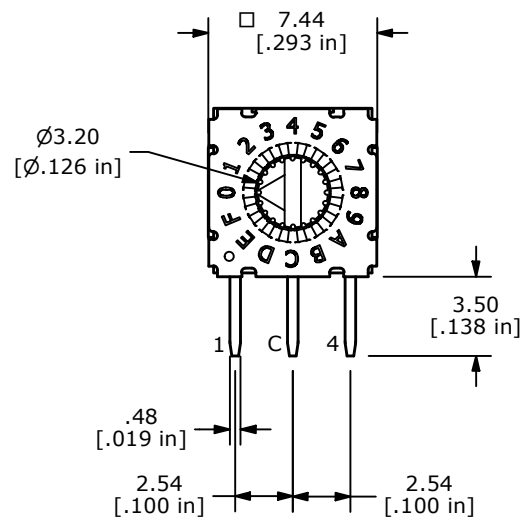

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102540	update operating force to 250fg Max.	02/18/24	MW	TITLE RDMBR16R2T				100123090
					SCALE 3:1	DATE 11/14/2022	DR JS	DWG U100021	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED