

1.Description

The PESDNC2FD5VB protects sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other voltage induced transient events. They feature large cross-sectional area junctions for conducting high transient currents, offer desirable electrical characteristics for board level protection, such as fast response time, low operating voltage. It gives designer the flexibility to protect one bi-directional line in applications where arrays are not practical.

3.Applications

- Cellular phones
- Portable devices

4.Mechanical Characteristics

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260°C


5.Pinning information

2.Features

- 80W peak pulse power per line ($t_p=8/20\mu s$)
- DFN1006 package
- Replacement for MLV(0402)
- Bidirectional configurations
- Response time is typically < 1ns
- Low clamping voltage
- RoHS compliant
- Transient protection for data lines to IEC61000-4-2(ESD) $\pm 30KV$ (air), $\pm 30KV$ (contact); IEC61000-4-4 (EFT) 40A (5/50ns)

- Digital cameras
- Power supplies

- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness: $\leq 3mil$

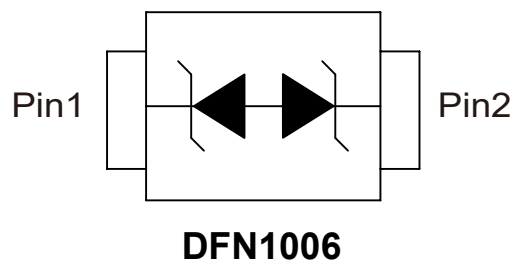



6. Absolute Maximum Ratings


Parameter	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	80	W
Junction Temperature	T_J	-55 to 150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$

7. Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T=1mA$	5.6	6.7	7.8	V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25^{\circ}C$			1	μA
Maximum Reverse Peak Pulse Current	I_{PP}			5.5		A
Clamping Voltage	V_C	$I_{PP}=1A$			10	V
		$I_{PP}=3A$			13	V
		$I_{PP}=5A$			15	V
Junction Capacitance	C_J	$V_R=0V, f=1MHz$		15	20	pF




8. Electrical Parameters (T_A=25°C unless otherwise noted)

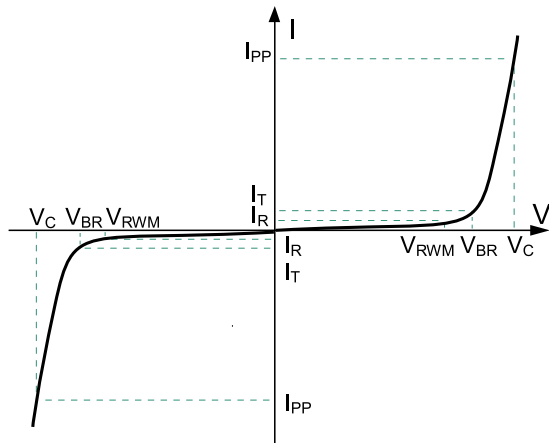

Symbol	Parameter
V _{RWM}	Peak Reverse Working Voltage
I _R	Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
P _{PP}	Peak Pulse Power
C _J	Junction Capacitance
I _F	Forward Current
V _F	Forward Voltage @ I _F



9.1 Typical characteristic

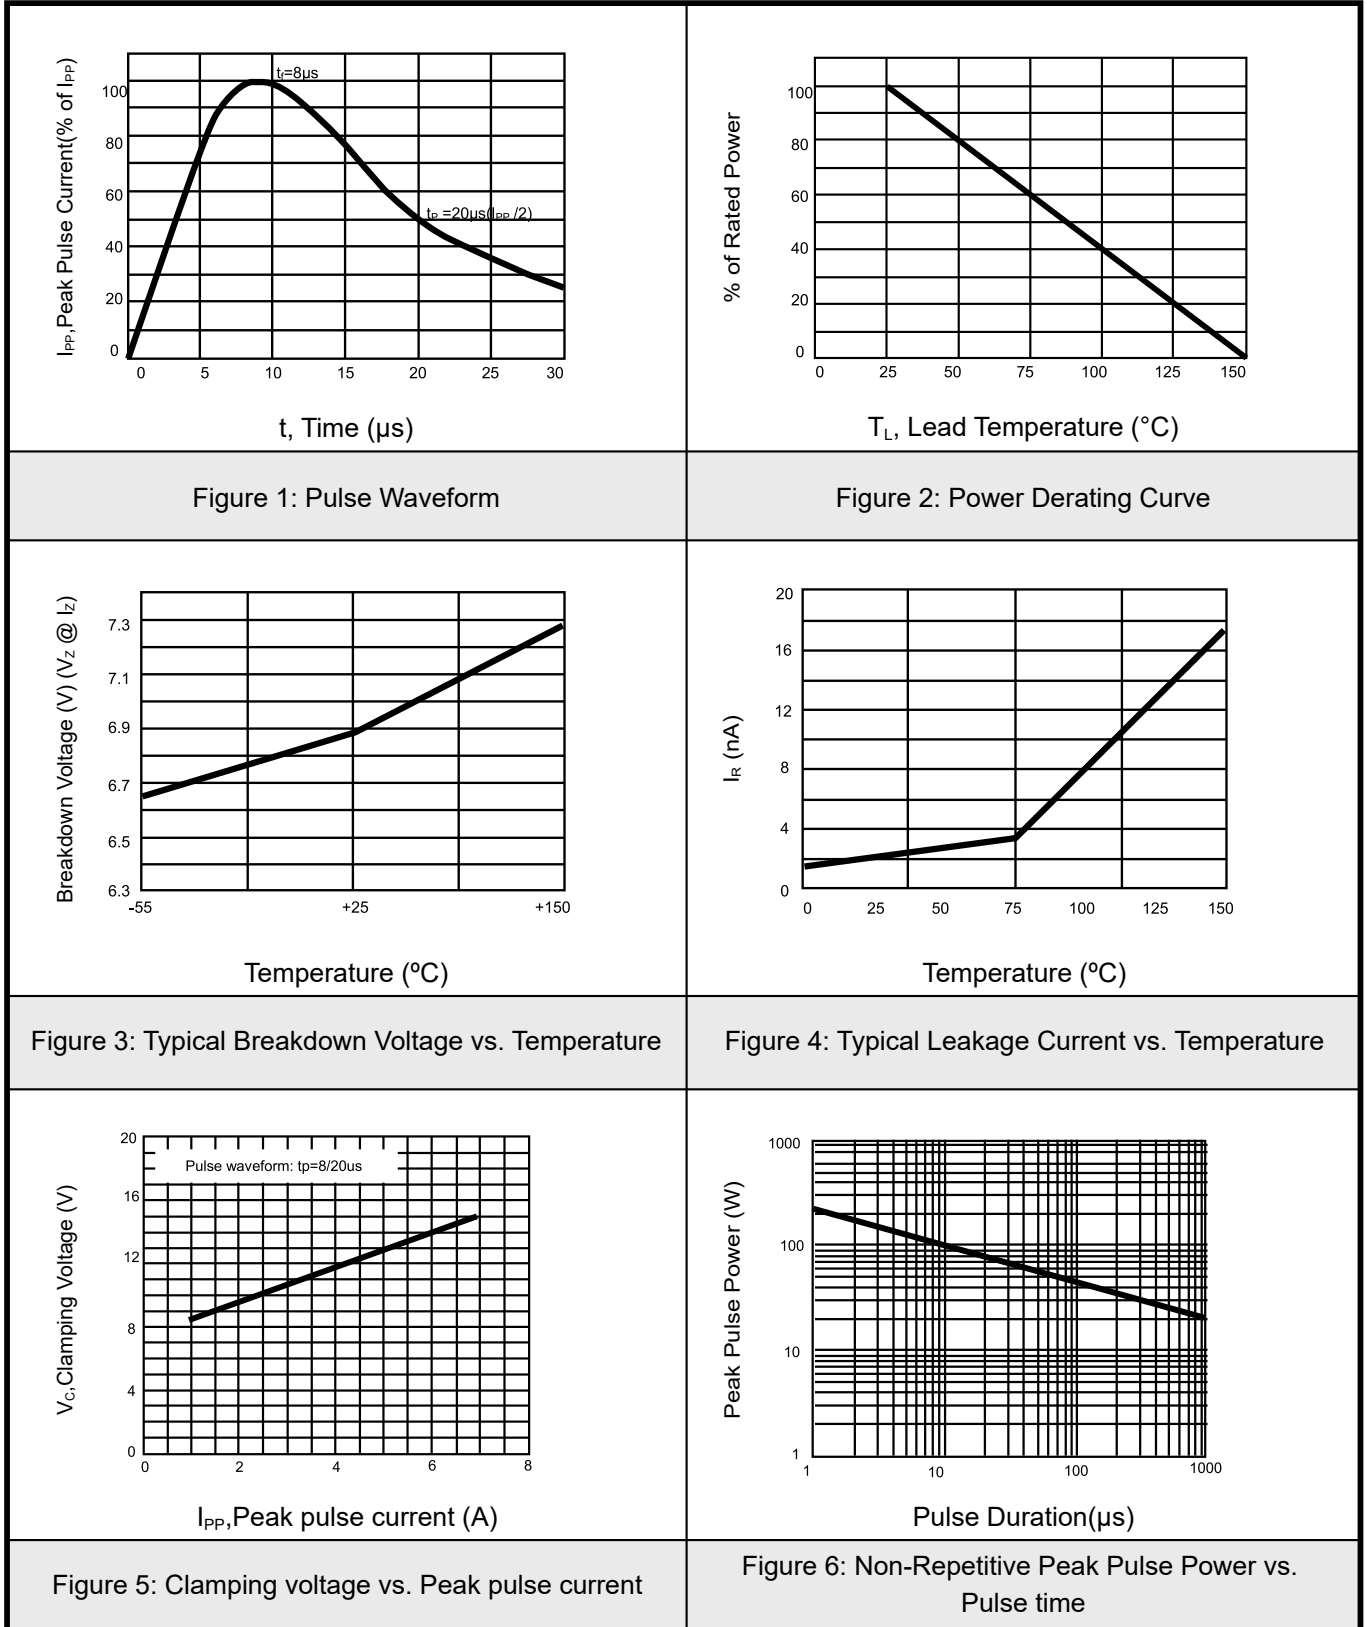



9.2 Typical characteristic


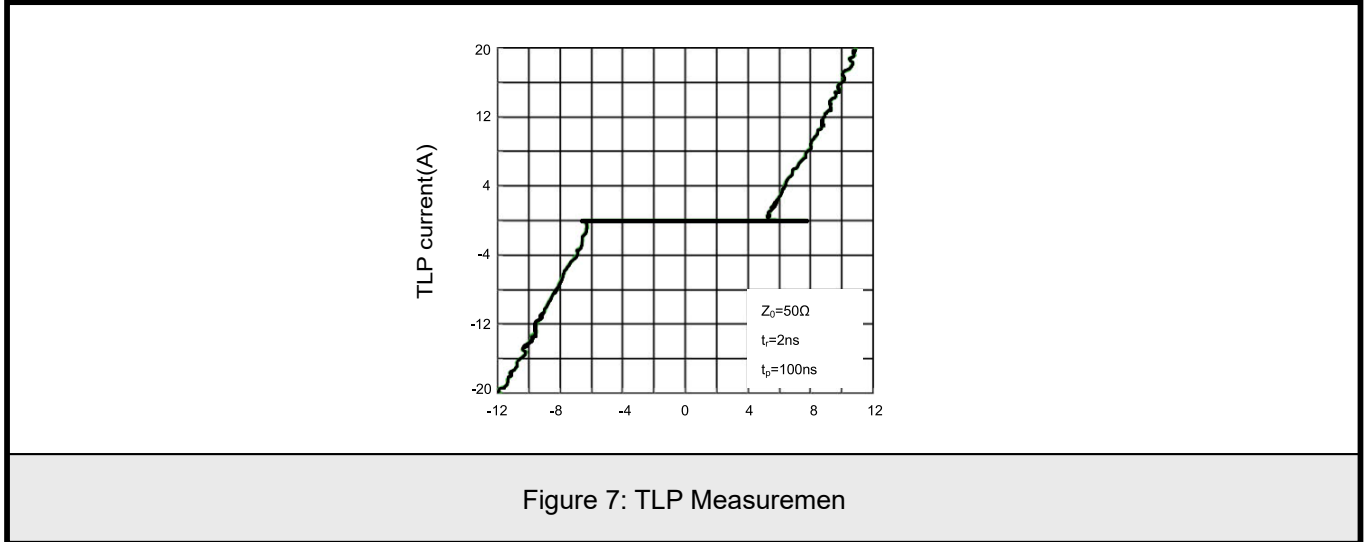


Figure 7: TLP Measuremen



10.DFN1006 Package Outline Dimensions

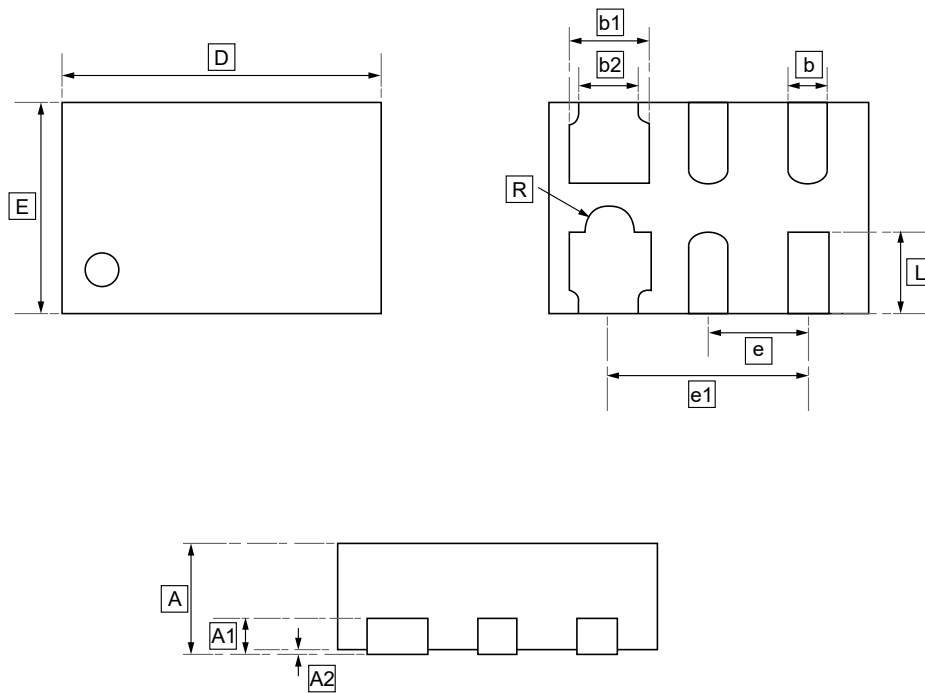

DIMENSIONS (mm are the original dimensions)

Symbol	D	E	L	b	b1	b2	e	e1	R	A	A1	A2
Min	1.55	0.95	0.33	0.15	0.35	0.25	0.50	1.00	0.125	0.45	0.152	-
Max	1.65	1.05	0.43	0.25	0.45	0.35	BSC	BSC	BSC	0.55	REF	0.05



11. Ordering information



Order Code	Package	Base QTY	Delivery Mode
UMW PESDNC2FD5VB	DFN1006	10000	Tape and reel



12.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.