

SPTECH Silicon NPN Power Transistor

2SD1403

DESCRIPTION



- High Breakdown Voltage
- High Switching Speed

APPLICATIONS

- Designed for use in horizontal deflection circuits of colour TV receivers.

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	800	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	6	A
I_{CM}	Collector Current-Peak	16	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	120	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55-150	$^\circ\text{C}$

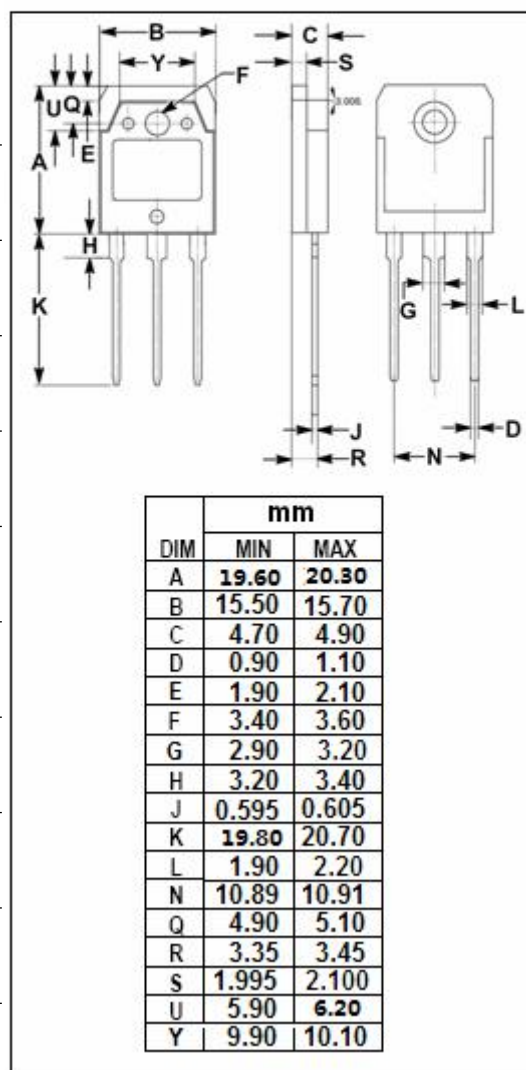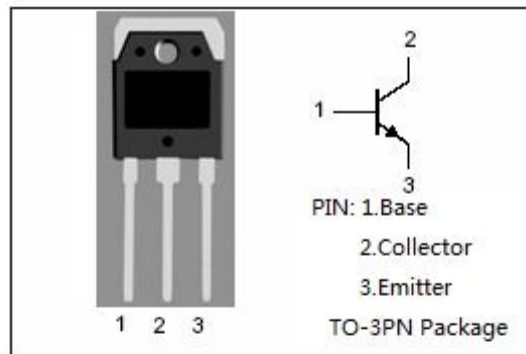

SPTECH Silicon NPN Power Transistor

2SD1403

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C = 1\text{mA}; I_E = 0$	1500			V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = 30\text{mA}; R_{BE} = \infty$	800			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = 1\text{mA}; I_C = 0$	7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 5\text{A}; I_B = 1\text{A}$			5.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 5\text{A}; I_B = 1\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = 800\text{V}; I_E = 0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{V}; I_C = 0$			1	mA
h_{FE}	DC Current Gain	$I_C = 1\text{A}; V_{CE} = 5\text{V}$	8			
f_T	Transition Frequency	$I_C = 1\text{A}; V_{CE} = 10\text{V}$		3		MHz
t_f	Fall Time	$I_C = 5\text{A}; I_{B1} = 1\text{A}; I_{B2} = 2\text{A}$			0.4	μs