





- NOTES:
1. Rating: 12VDC 50mA
 1. 额定值: 12VDC 50mA
 2. Dielectric Strength: 250V AC
 2. 耐电压: 250V AC
 3. Contact Resistance: ≤50mΩ Max
 3. 接触电阻: ≤50mΩ
 4. Insulation Resistance: ≥100MΩ
 4. 绝缘电阻: ≥100MΩ
 5. Operating Force: 260±30gf
 5. 操作力: 260±30gf
 6. Life: 100,000 times
 6. 寿命: 100,000 times
 7. Trip: 0.20±0.10mm
 7. 行程: 0.20±0.10mm

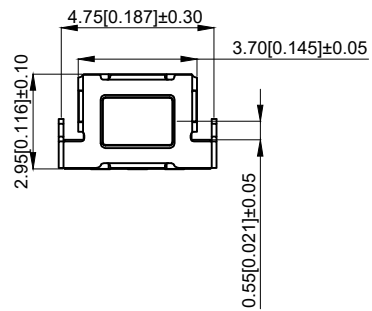

PCB. 安装图

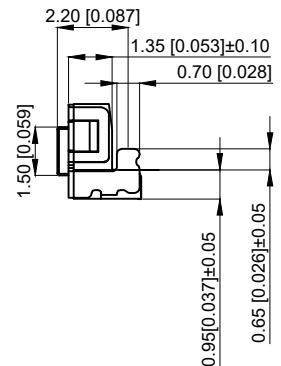

CIRCUIT DIAGRAM



6	Dustproof film 防尘膜	PI	1	Yellow 黄色
5	Contact 触点	Phosphorous copper 磷铜	1	Ag plating 镀银
4	Pedestal 基座	LCP	1	Black 黑色
3	Reed 簧片	SUS	2	Covered with silver 覆银
2	Cover plate 盖板	Phosphorous copper 磷铜	1	Ag plating 镀银
1	Button 按钮	LCP	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	
	—

UNIT	MM	PROJECTED	PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO
DATE	2019	APPROVAL	B ALEN
ROCPCU TECHNOLOGY CO., LTD			
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission			

MODEL NO: TP14822629
<https://www.rocpcu.tw>