




- NOTES:
1. Rating: 12VDC 50mA
 1. 额定值: 12VDC 50mA
 2. Dielectric Strength: 100V AC
 2. 耐电压: 100V AC
 3. Contact Resistance: ≤100mΩ Max
 3. 接触电阻: ≤100mΩ
 4. Insulation Resistance: ≥100MΩ
 4. 绝缘电阻: ≥100MΩ
 5. Operating Force: 200±100gf
 5. 操作力: 200±100gf
 6. Life: 10,000 times
 6. 寿命: 10,000 次
 7. operate temperature: -10°C~60°C
 7. 操作温度: -10°C~60°C
 8. Material Properties: SGS
 8. 材料属性: 环保



4	Cover 盖子	SUS	1	Silvery white 银白色
3	Contact spring 接触簧片	Bronze	2	Silvery white 银白色
2	Key 按键	Nylon	1	Black 黑色
1	Base 底座	PPA-Brass	4	Ag plating-Black 镀银-黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE

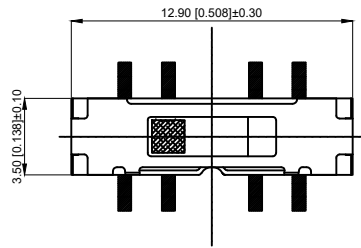

COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25

ANGULAR

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP610120340
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				