

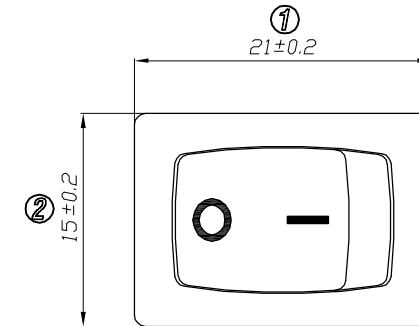


1. 电路CIRCUIT:ON/OFF
2. 快插端子 QUICK CONNECTOR TYPE ;
单刀单掷 (SINGLE POLE SINGLE THROW);
3. 额定值 RATING:16A 125/250VAC (UL;C-UL);
12A 125/250VAC (UL;C-UL);
16(4)A 250V~T125/55(ENEC17;NEMKO;CQC;CB)
4. 柄的颜色 ACTUATOR COLOR: 黑色BLACK
基座的颜色 HOUSING COLOR: 黑色BLACK
5. 柄的印字形式 ACTUATOR PRINTING: 白色"O/-" WHITE COLOR
6. 所有部件均使用环保材料
ALL MATERIALS USE IN CONFORMITY WITH THE RoHS DIRECTIVE




TEL : 0769-82310511-867



PANEL CUTOUT DIMENSION



PANEL THICKNESS	X	Y
0.75~1.25mm	19.2 ^{+0.2} ₋₀ mm	12.9 ^{+0.15} ₋₀ mm
1.25~2.0mm	19.4 ^{+0.2} ₋₀ mm	12.9 ^{+0.15} ₋₀ mm

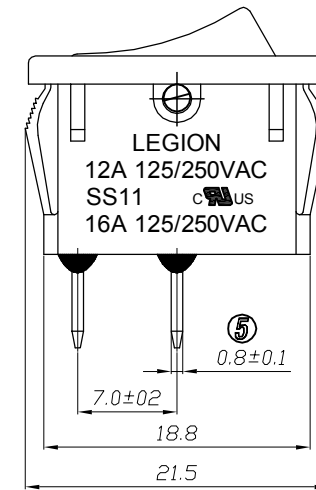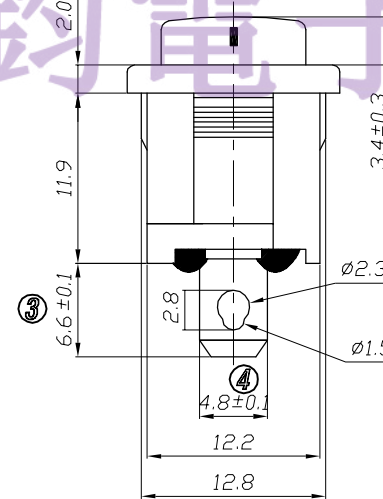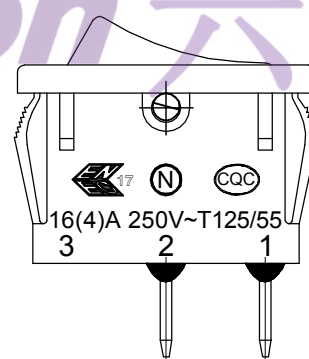

5	→	10		DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				LMC 2019.05.20	SCALE	NO		
3	→	8	→	X	±0.30					MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	修改建议开口尺寸公差	6	→	X.XX	±0.10					SS11-BBIWG-R20-K		WIF119165	A0
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°					LEGION ELECTRONIC & HARDWARE CO., LTD.			