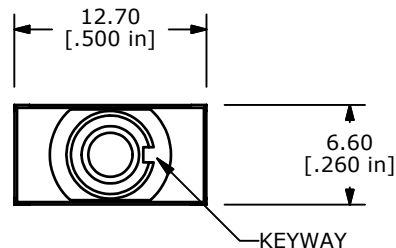


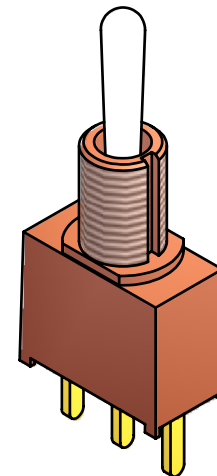
Without Locking Ring

PANEL MOUNTING

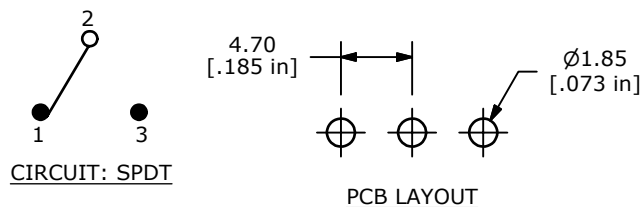
With Standard Locking Ring



KEYWAY

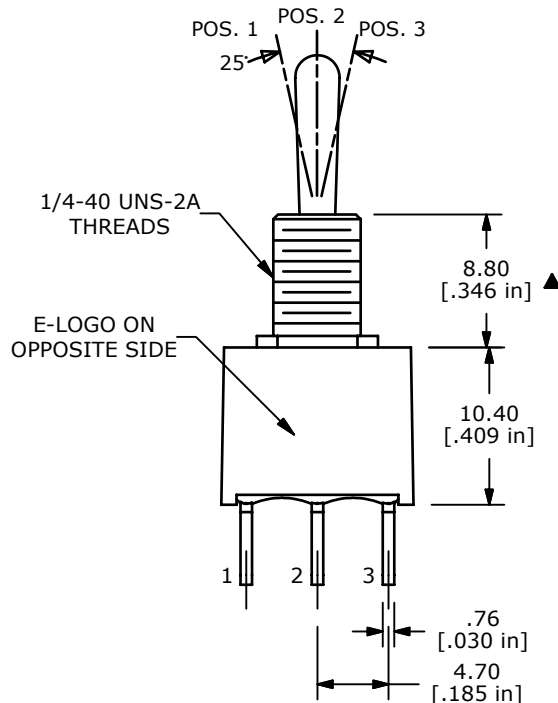
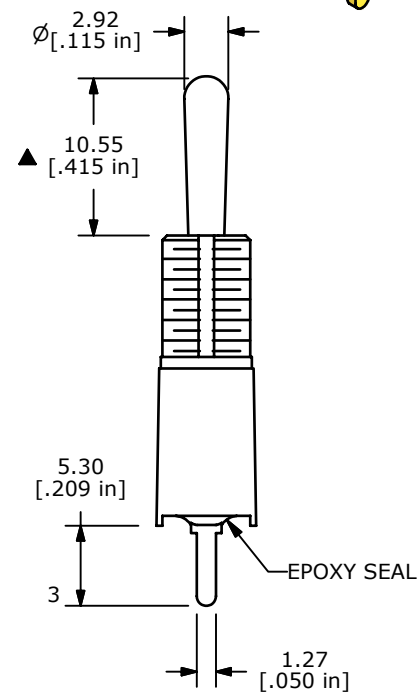
ISOMETRIC

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1



CIRCUIT: SPDT

PCB LAYOUT

1/4-40 UNS-2A
THREADS
E-LOGO ON
OPPOSITE SIDE

EPOXY SEAL

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
- ▲ 5. RATING: 0.4 VA MAX. @ 20V (AC or DC)
6. MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE 100AWSP3T1B1M2RE

SCALE 2:1

DATE 1/21/2008

DR BLR

DWG T103022

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	17929	RELEASE FOR PRODUCTION	1/21/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY