

1.Features

This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for low gate charge, low $R_{DS(ON)}$ and fast switching speed.

2.2Features

- High Performance Trench Technology for Extremely Low $R_{DS(ON)}$

2.1Features


- $V_{DS(V)}=30V$
- $I_D=7.5A(V_{GS}=10V)$
- $R_{DS(ON)}<18m\Omega(V_{GS}=10V)$
- $R_{DS(ON)}<21m\Omega(V_{GS}=4.5V)$
- Low Gate Charge

- High Power and Current Handling Capability

3.Pinning information

| Pin | Symbol | Description |
|---------|--------|-------------|
| 1,3 | S | SOURCE |
| 2,4 | G | GATE |
| 5,6,7,8 | D | DRAIN |

SOP-8

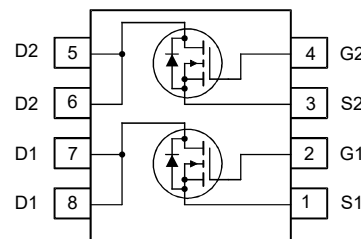

4.Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

| Parameter | Symbol | Rating | Units |
|---|----------------|------------|----------------|
| Drain-Source Voltage | V_{DSS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | |
| Drain Current Continuous ($T_A=25^\circ C, V_{GS}=10V, R_{\theta JA}=50^\circ C/W$) | I_D | 7.5 | A |
| Continuous ($T_A=25^\circ C, V_{GS}=4.5V, R_{\theta JA}=50^\circ C/W$) | | 6.9 | |
| Pulsed | | 49 | |
| Single Pulse Avalanche Energy (Note 1) | E_{AS} | 57 | mJ |
| Power Dissipation | P_D | 1.6 | W |
| Derate above $25^\circ C$ | | 13 | mW/ $^\circ C$ |
| Storage Temperature | T_J, T_{STG} | -55 to 150 | $^\circ C$ |



5. Thermal Characteristics

| Parameter | Symbol | Rating | Units |
|---|-----------------|--------|---------------|
| Thermal Resistance, Junction to Case (Note 2) | $R_{\theta JC}$ | 40 | $^{\circ}C/W$ |
| Thermal Resistance, Junction to Ambient (Note 2a) | $R_{\theta JA}$ | 78 | $^{\circ}C/W$ |
| Thermal Resistance, Junction to Ambient (Note 2b) | $R_{\theta JA}$ | 135 | $^{\circ}C/W$ |

Notes:

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Starting $T_J=25^{\circ}C$, $L=1mH$, $I_{AS}=7.5A$, $V_{DD}=30V$, $V_{GS}=10V$.

2. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.

$R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.

- $78^{\circ}C/W$ when mounted on a 0.5 in^2 pad of 2 oz copper.
- $125^{\circ}C/W$ when mounted on a 0.02 in^2 pad of 2 oz copper.
- $135^{\circ}C/W$ when mounted on a minimum pad.



6. Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Conditions | | Min | Typ | Max | Units |
|----------------------------------|--------------|--|--|-----|-----|-----------|---------------|
| Drain-Source Breakdown Voltage | BV_{DSS} | $I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$ | | 30 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=24\text{V}$, $V_{GS}=0\text{V}$ | | | | 1 | μA |
| | | $V_{DS}=24\text{V}$, $V_{GS}=0\text{V}$, $T_J=150^\circ\text{C}$ | | | | 250 | μA |
| Gate to Source Leakage Current | I_{GSS} | $V_{GS}=\pm 20\text{V}$ | | | | ± 100 | nA |
| Gate to Source Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$ | | 1.2 | | 2.5 | V |
| Drain to Source On Resistance | $R_{DS(on)}$ | $I_D=7.5\text{A}$, $V_{GS}=10\text{V}$ | | | 14 | 18 | m Ω |
| | | $I_D=6.9\text{A}$, $V_{GS}=4.5\text{V}$ | | | 17 | 21 | m Ω |
| | | $I_D=7.5\text{A}$, $V_{GS}=10\text{V}$, $T_C=150^\circ\text{C}$ | | | 22 | 29 | m Ω |
| Input Capacitance | C_{iss} | $V_{DS}=15\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$ | | | 907 | 1270 | pF |
| Output Capacitance | C_{oss} | | | | 191 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | | 112 | | pF |
| Gate Resistance | R_g | $V_{GS}=0.5\text{V}$, $f=1\text{MHz}$ | | | 1.2 | 4 | Ω |
| Total Gate Charge at 10V | $Q_{g(TOT)}$ | $V_{GS}=0\text{V}$ to 10V | $V_{DD}=15\text{V}$ $I_D=7.5\text{A}$ | | 17 | 26 | nC |
| Total Gate Charge at 5V | $Q_{g(5)}$ | $V_{GS}=0\text{V}$ to 5V | | | 9 | 14 | nC |
| Gate to Source Gate Charge | Q_{gs} | $V_{DD}=15\text{V}$, $I_D=7.5\text{A}$ | | | 2.3 | | nC |
| Gate Charge Threshold to Plateau | Q_{gs2} | | | | 1.5 | | nC |
| Gate to Drain "Miller" Charge | Q_{gd} | | | | 3.3 | | nC |
| Turn-On Time | t_{on} | $V_{DD}=15\text{V}$, $I_D=7.5\text{A}$ $V_{GS}=10\text{V}$, $R_{GS}=16\Omega$ | | | 44 | 66 | ns |
| Turn-On Delay Time | $t_{D(on)}$ | | | | 7 | 10.5 | ns |
| Rise Time | t_r | | | | 37 | 55.5 | ns |
| Turn-Off Delay Time | $t_{D(off)}$ | | | | 48 | 72 | ns |
| Fall Time | t_f | | | | 24 | 36 | ns |
| Turn-Off Time | t_{off} | | | | 72 | 108 | ns |




| | | | | | | |
|-------------------------------|----------|--------------------------------------|--|----|------|----|
| Source to Drain Diode Voltage | V_{SD} | $I_{SD}=7.5A$ | | | 1.25 | V |
| | | $I_{SD}=2.1A$ | | | 1 | V |
| Reverse Recovery Time | t_{rr} | $I_{SD}=7.5A, di_{SD}/dt=100A/\mu s$ | | 19 | 25 | ns |
| Reverse Recovered Charge | Q_{rr} | $I_{SD}=7.5A, di_{SD}/dt=100A/\mu s$ | | 10 | 13 | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.



7.1 Typical Characteristics

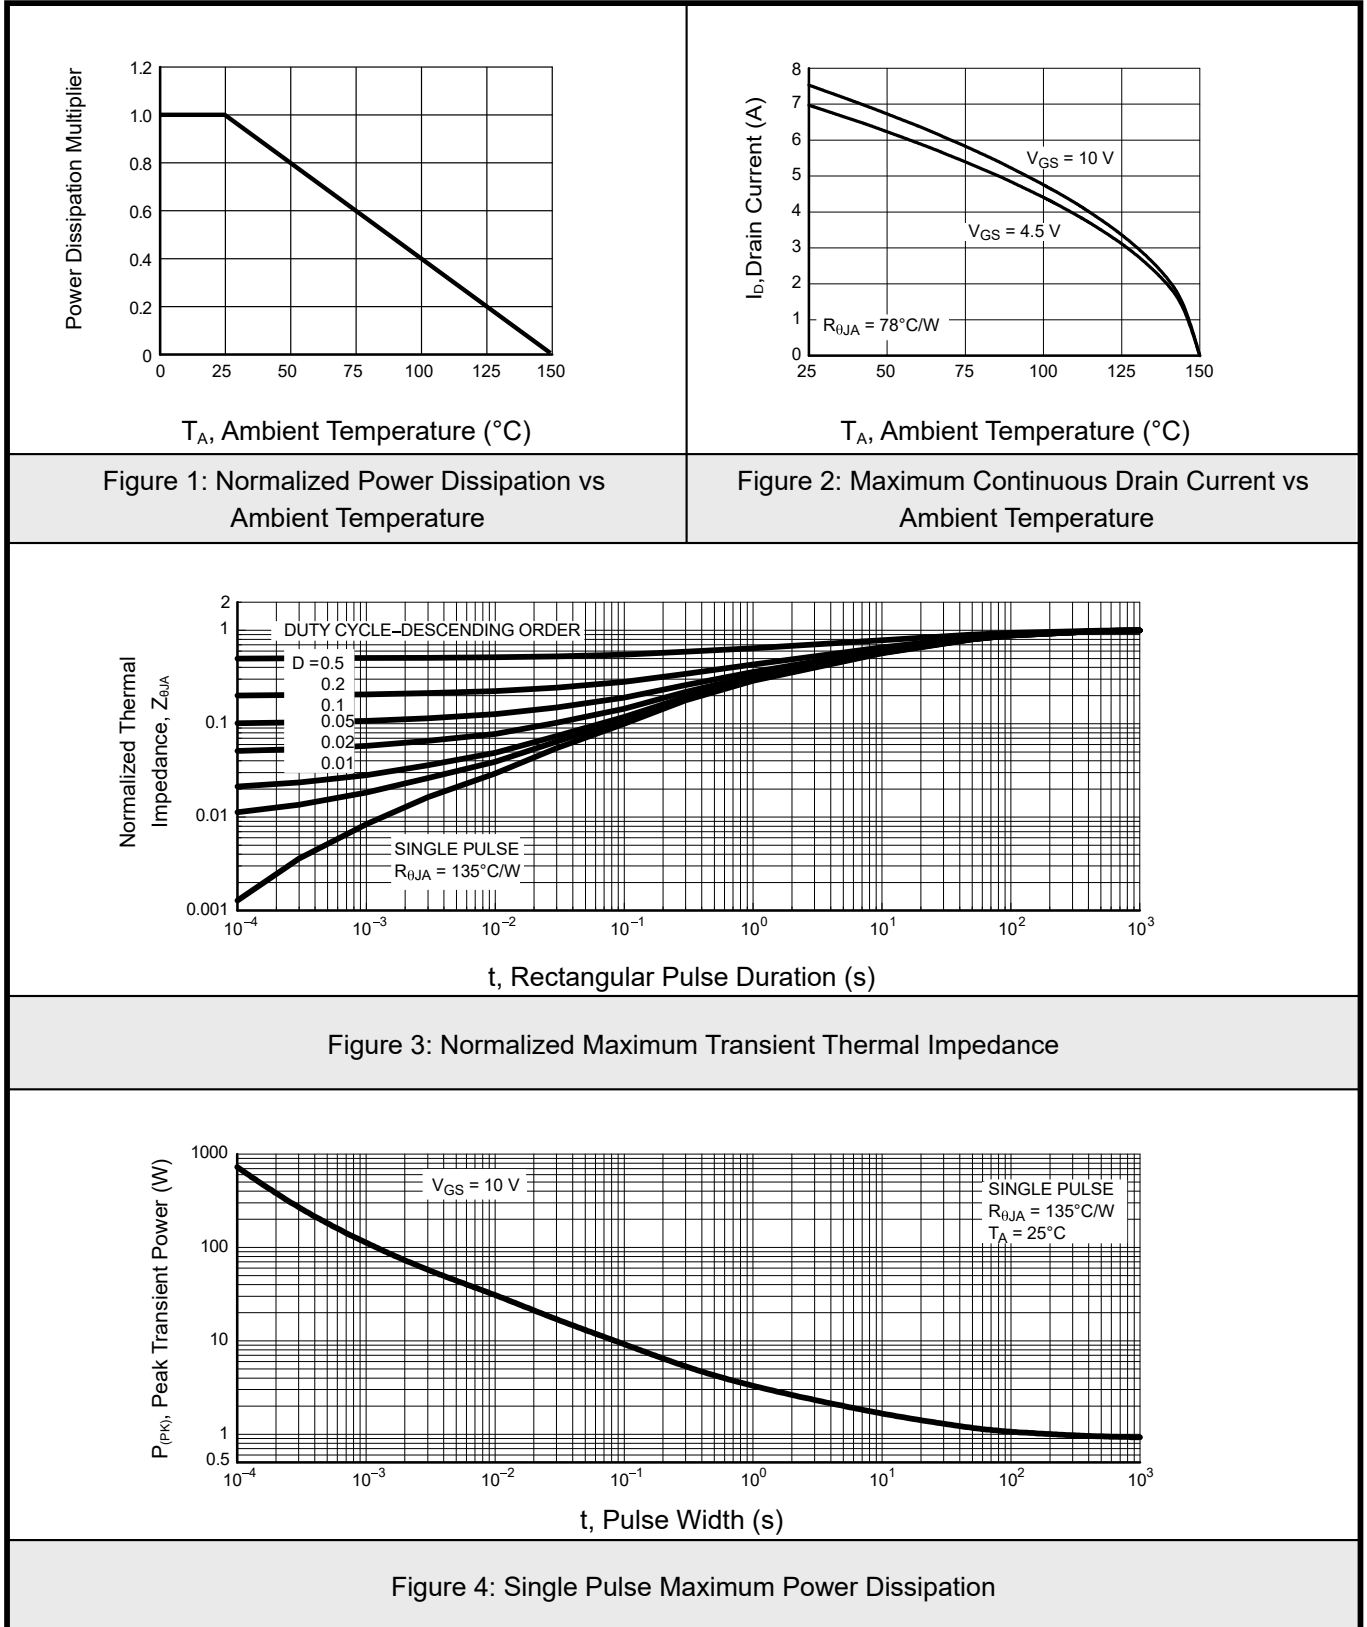




7.2 Typical Characteristics

| | |
|---|---|
| <p>I_{AS}, Avalanche Current (A)</p> <p>t_{AV}, Time In Avalanche(ms)</p> <p>STARTING $T_J = 25^\circ\text{C}$</p> <p>STARTING $T_J = 150^\circ\text{C}$</p> <p>If $R = 0$ $t_{AV} = (L / I_{AS}) / (1.3 * \text{RATED } BV_{DS} - V_{DD})$ If $R \neq 0$ $t_{AV} = (L / R) \ln [(I_{AS} * R) / (1.3 * \text{RATED } BV_{DS} - V_{DD}) + 1]$</p> | <p>$I_D$, Drain Current (A)</p> <p>V_{DS}, Drain to Source Voltage (V)</p> <p>PULSE DURATION = 80 μs DUTY CYCLE = 0.5% MAX $V_{DS} = 5 \text{ V}$</p> <p>$T_J = 25^\circ\text{C}$</p> <p>$T_J = 150^\circ\text{C}$</p> <p>$T_J = -55^\circ\text{C}$</p> |
| <p>Figure 5: Unclamped Inductive Switching Capability</p> | <p>Figure 6: Transfer Characteristics</p> |
| <p>I_D, Drain Current (A)</p> <p>V_{DS}, Drain to Source Voltage (V)</p> <p>PULSE DURATION = 80 μs DUTY CYCLE = 0.5% MAX</p> <p>$V_{GS} = 10 \text{ V}$</p> <p>$V_{GS} = 5 \text{ V}$</p> <p>$V_{GS} = 4.5 \text{ V}$</p> <p>$V_{GS} = 3.5 \text{ V}$</p> <p>$V_{GS} = 3 \text{ V}$</p> | <p>$R_{DS(on)}$, Drain to Source On Resistance(mΩ)</p> <p>V_{GS}, Gate to Source Voltage (V)</p> <p>PULSE DURATION = 80 μs DUTY CYCLE = 0.5% MAX</p> <p>$I_D = 10.2 \text{ A}$</p> <p>$I_D = 1 \text{ A}$</p> |
| <p>Figure 7: Saturation Characteristics</p> | <p>Figure 8: Drain to Source On Resistance vs Gate Voltage and Drain Current</p> |
| <p>Normalized Drain To Source On Resistance</p> <p>T_J, Junction Temperature ($^\circ\text{C}$)</p> <p>PULSE DURATION = 80 μs DUTY CYCLE = 0.5% MAX</p> <p>$V_{GS} = 10 \text{ V}, I_D = 10.2 \text{ A}$</p> | <p>Normalized Gate Threshold Voltage</p> <p>T_J, Junction Temperature ($^\circ\text{C}$)</p> <p>$V_{GS} = V_{DS}, I_D = 250 \mu\text{A}$</p> |
| <p>Figure 9: Normalized Drain to Source On Resistance vs Junction Temperature</p> | <p>Figure 10: Normalized Gate Threshold Voltage vs Junction Temperature</p> |




7.3 Typical Characteristics

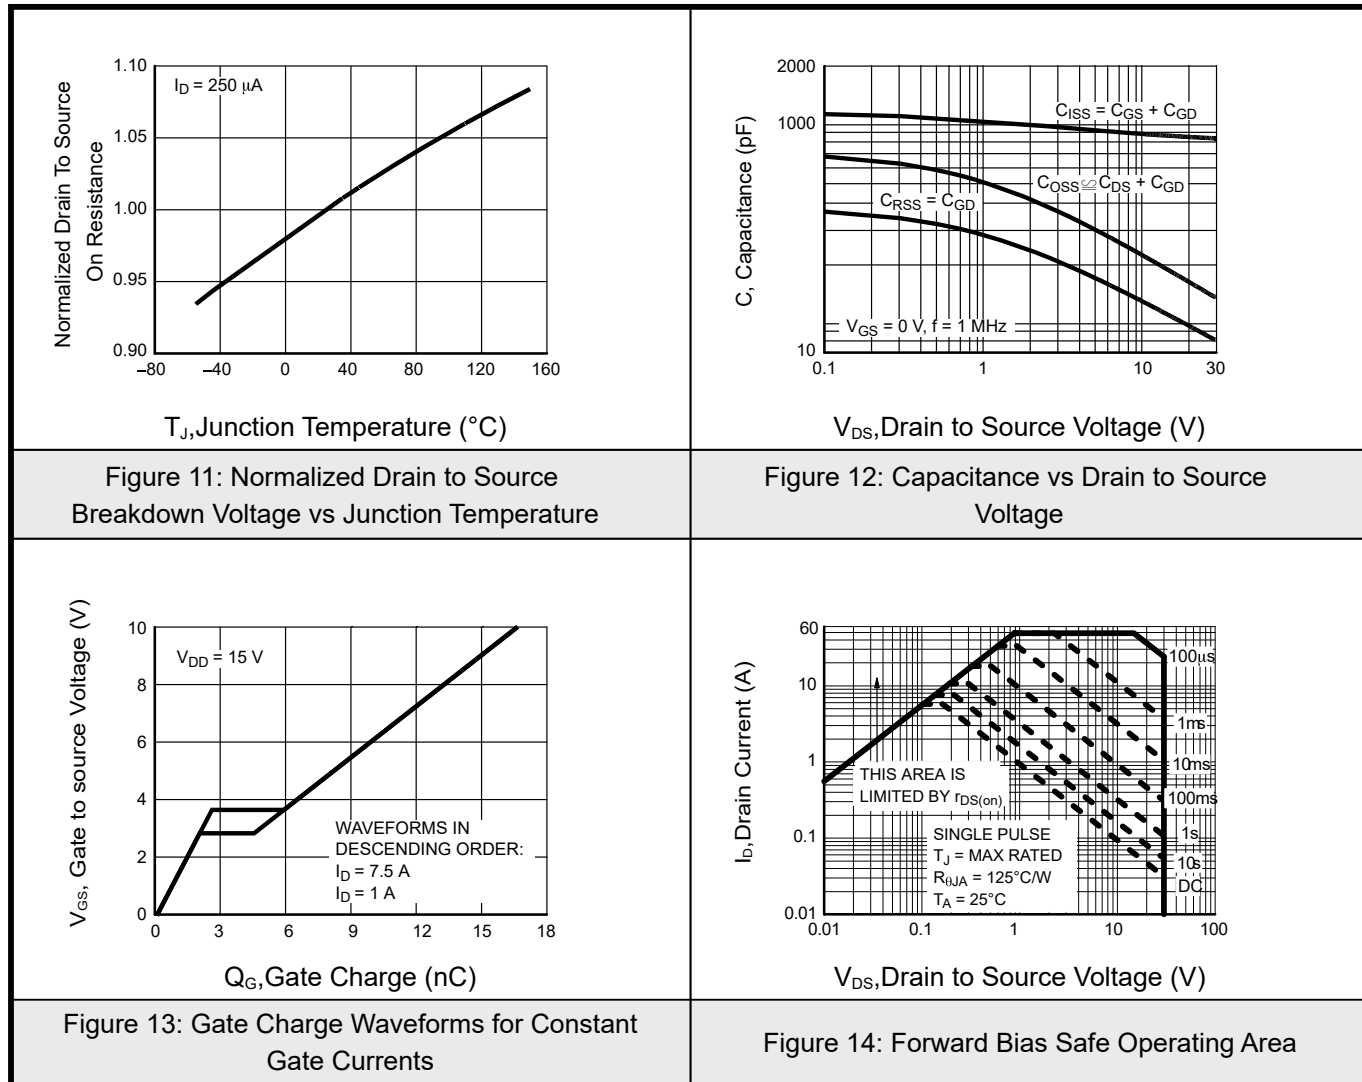



8.SOP-8 Package Outline Dimensions

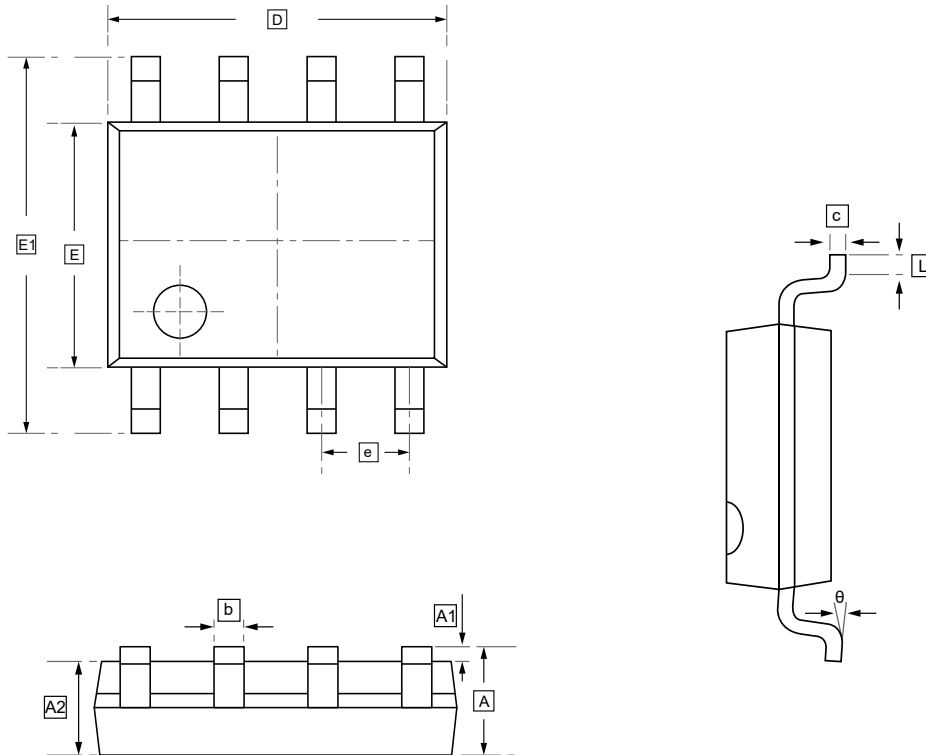


DIMENSIONS (mm are the original dimensions)

| Symbol | A | A1 | A2 | b | c | D | E | E1 | e | L | θ |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| Min | 1.350 | 0.000 | 1.350 | 0.330 | 0.170 | 4.700 | 3.800 | 5.800 | 1.270 | 0.400 | 0° |
| Max | 1.750 | 0.100 | 1.550 | 0.510 | 0.250 | 5.100 | 4.000 | 6.200 | BSC | 1.270 | 8° |



9. Ordering information



yy: Year Code
ww: Week Code

| Order Code | Package | Base QTY | Delivery Mode |
|-------------|---------|----------|---------------|
| UMW FDS8978 | SOP-8 | 3000 | Tape and reel |



10.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.