
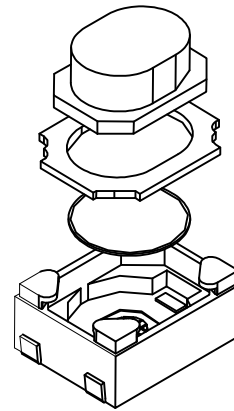



电路图
CIRCUIT DIAGRAM



NOTES:

1. Rate Voltage :50mA
1. 额定电流: 50mA
2. Contact Resistance: ≤100m Ω
2. 接触电阻: ≤100m Ω
3. Operating Force: 260±50gf
3. 按力: 260g±50gf
4. Travel: 0.20±0.1mm
4. 行程: 0.20±0.1mm
5. Insulated Resistance: ≥100mΩ
5. 绝缘电阻: ≥100mΩ
6. Dielectric Strength: ≥250VAC
6. 介电强度: ≥250VAC
7. life: 100000 times
7. 寿命: 100000 次
8. working temperature: -20°C~80°C
8. 工作温度: -20°C~80°C

5	Push-button 按钮	Silica gel	1	Bluc 蓝色
4	Blind flange 盖板	Phosphorous copper	1	Copper tin plating 镀铜锡
3	Shrapnel 弹片	SUS	1	Ag plating 镀银
2	Noumenon 本体	LCP	1	white 白色
1	Card 卡件	Phosphorous copper	1	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25

ANGULAR

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP12022625
DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				